

NOVA LUCE


Leaflet - LED Strips & Silicon NEON
2025



LED STRIPS & NEON FLEX

Our extensive range of **Led Strips** and **NEON Flex** is designed to meet diverse lighting needs with **unmatched performance, versatility, and durability**. Manufactured with **high-quality materials** and **advanced technology**, these products ensure consistent illumination with **SDCM<3**, guaranteeing uniform color and brightness across all applications. Whether enhancing indoor spaces, highlighting outdoor architectural features, or serving specialized purposes, our **Led Strips** and **NEON Flex** meet the **highest photometric standards**. Featuring **waterproof protection, flexible designs**, and **compatibility** with advanced control systems such as **SPI** and **DMX**, they are ideal for creative and functional projects. From subtle accents to bold lighting statements, our broad range of products ensures seamless integration and exceptional reliability in any environment.

CHEAT SHEET	Page 8-11
NEON FLEX	Page 12-23
UNDERWATER	Page 24-31
LED STRIPS	Page 32-57
WALLWASHERS	Page 58-61
PROFILES	Page 62-63
LED DRIVERS	Page 64-65
ACCESORIES	Page 66-67

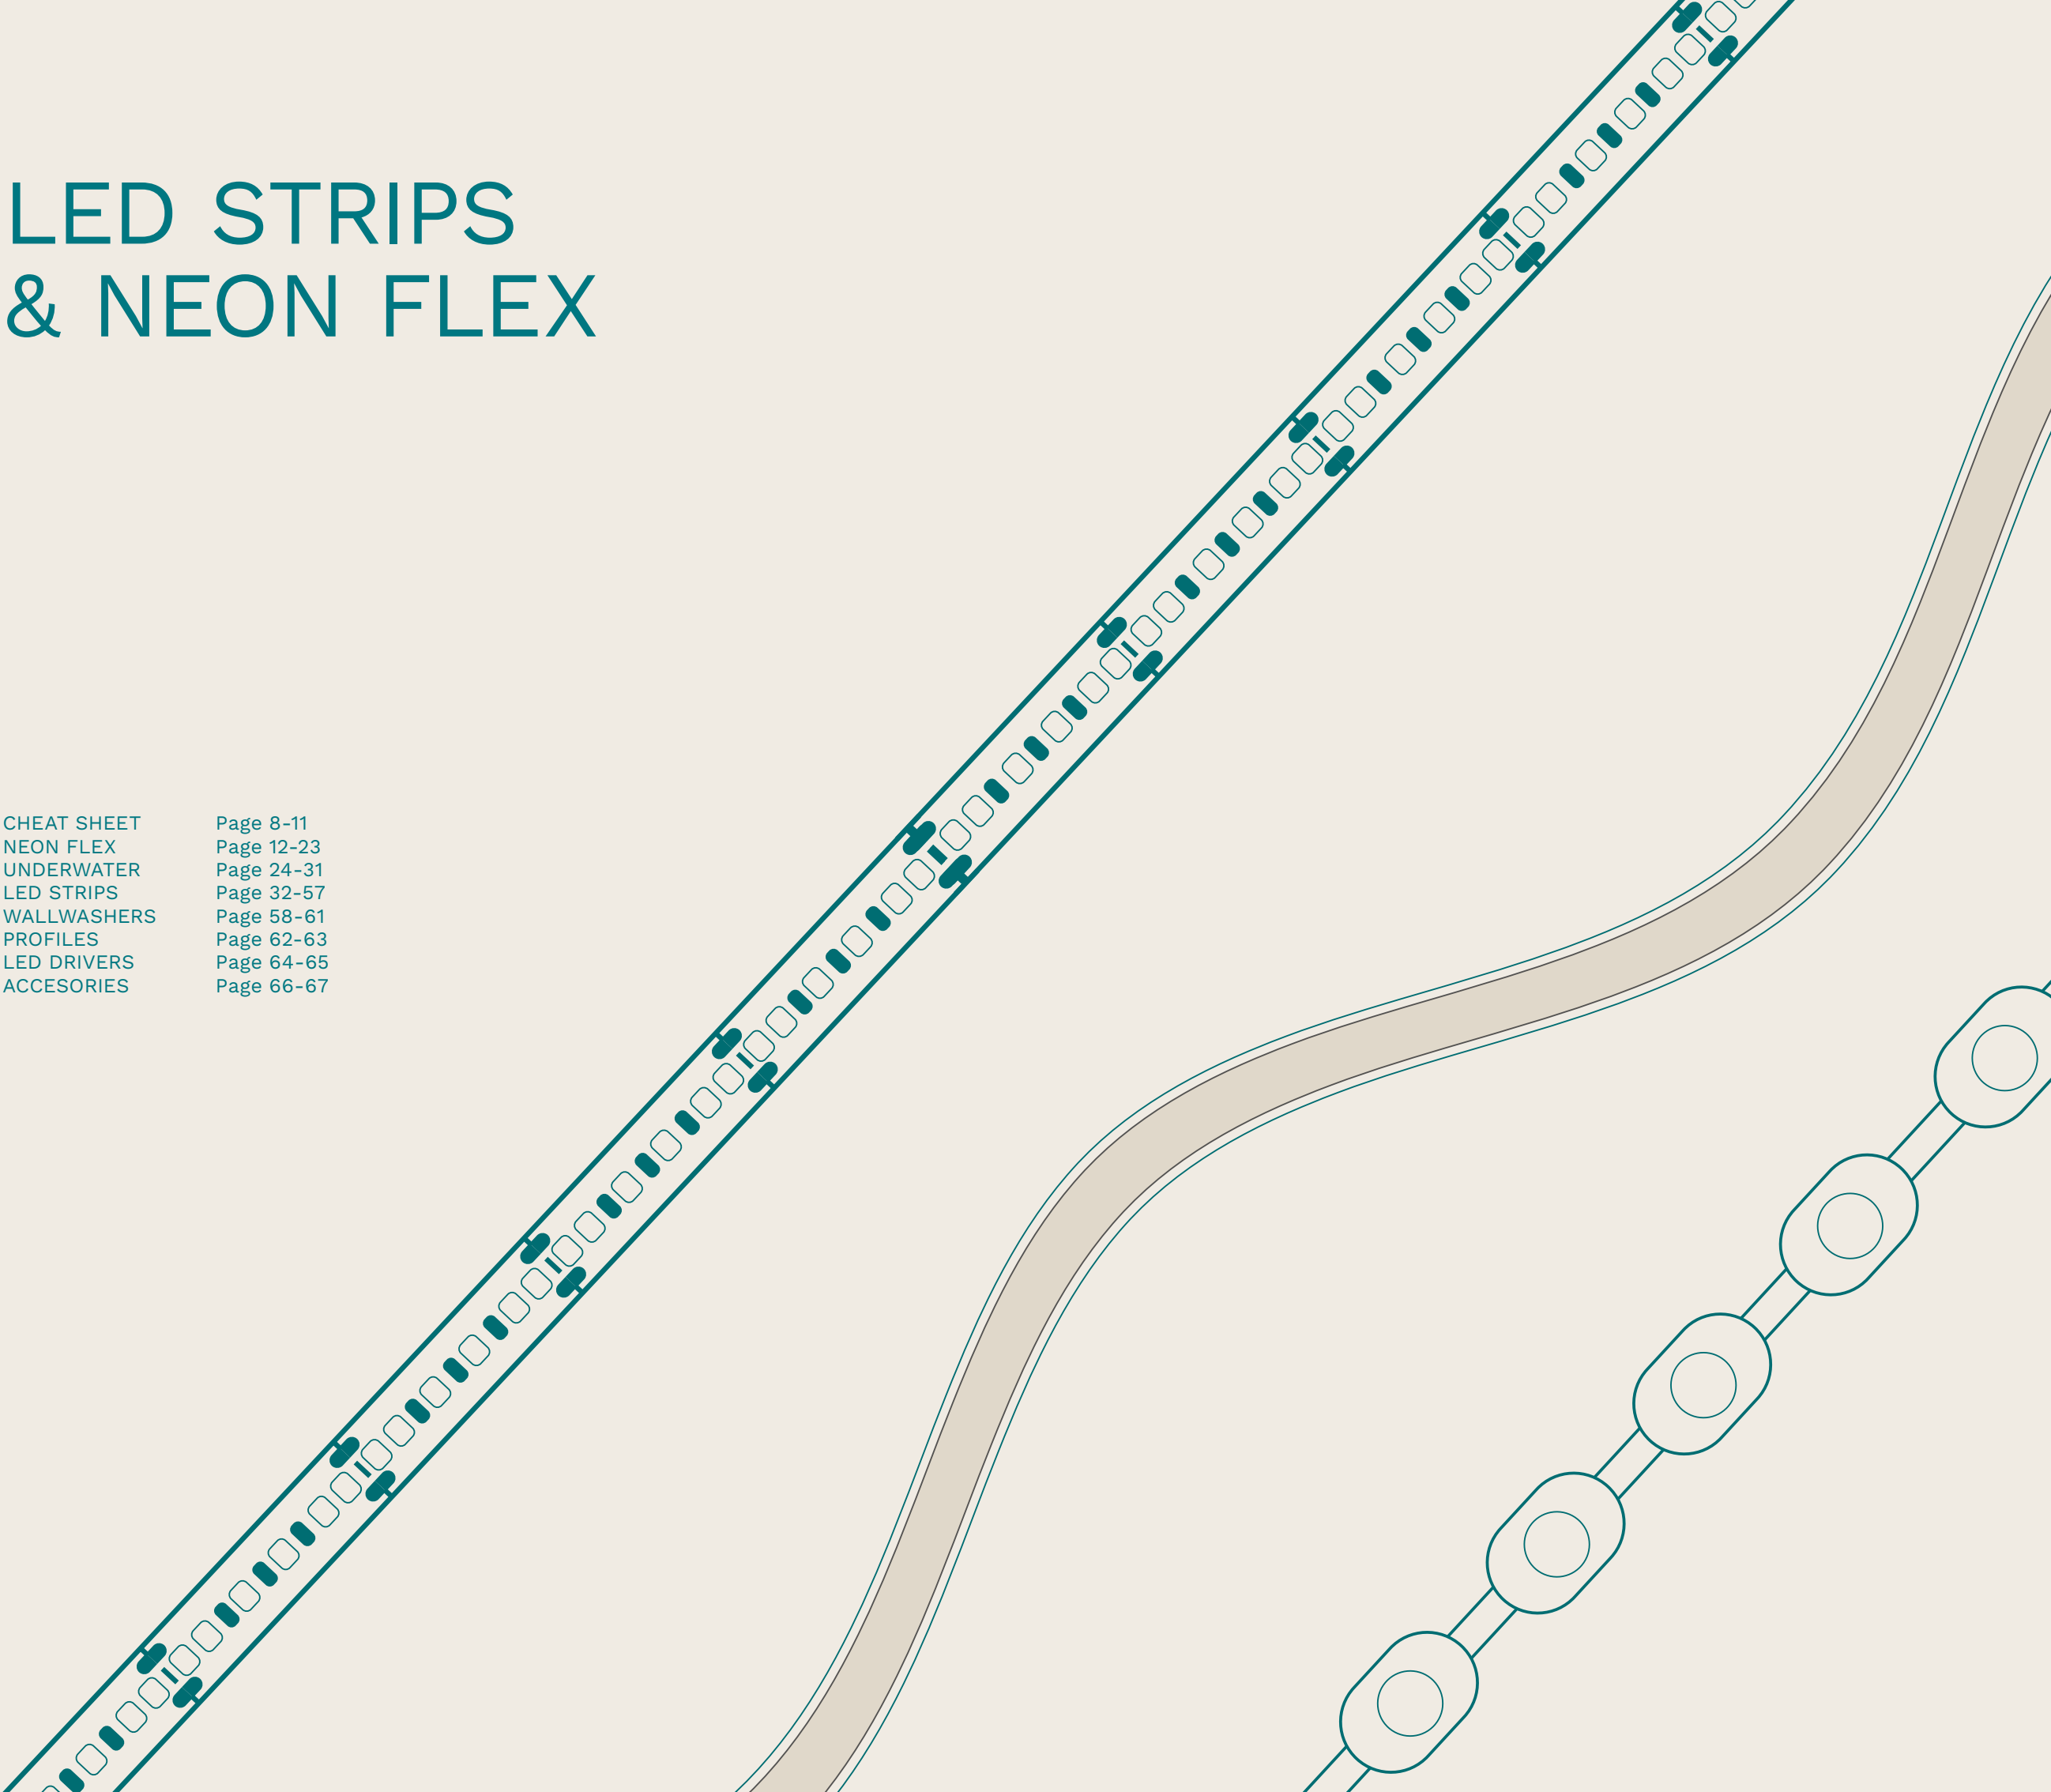

Product Categories & Series

Three Different product categories Architecture Neon FLEX, LED Strip & Silicone Wallwashers

Our product range contains two series of products, The “ESSENTIAL” series and the “PRO” Series.

Architecture Neon Flex

The Architecture Neon Series comprises high-reliability neon flex lighting designed for versatile use in indoor, outdoor, and underwater environments. This series includes Facade Light and Underwater options. Facade Light is offered in various sizes, light colors, and SPI/DMX control options, providing a versatile solution for applications demanding exceptional photoelectric performance. Underwater is distinguished by its IK08 and IP68 protection ratings, ensuring durability and reliability for underwater lighting installations.



Led Strips

Led Strips, designed to meet diverse lighting needs with exceptional performance and reliability. Built to withstand various conditions, including waterproof options, they deliver high photometrical standards for precise and vibrant illumination. Ideal for both functional and decorative applications, our Led Strips combine durability and efficiency, ensuring they excel in any environment.



Silicon Wallwashers

Wallwashers offer a versatile and durable solution for illuminating walls with smooth, even light distribution. Designed with advanced materials, they provide excellent resistance to environmental factors, ensuring long-lasting performance. Perfect for both indoor and outdoor applications, these wallwashers deliver high photometric accuracy, creating dynamic lighting effects for architectural and decorative projects.




Essential

The Essential series is a versatile and affordable lighting solution designed for everyday use. These Led Strips provide a balance of efficiency and functionality, making them ideal for both residential and commercial applications. Featuring a flexible and easy-to-install design, they can be customized to fit a variety of spaces, including under cabinets, shelves, or around decorative elements. With energy-efficient LEDs, the Basic series offers reliable illumination while reducing power consumption. Available in a range of color temperatures and brightness levels, these strips provide a simple yet effective way to enhance ambiance and visibility in any setting.




Pro

The PRO series is a premium lighting solution engineered for superior performance and precision. Designed with energy efficiency in mind, these products deliver high luminous output while consuming minimal power, making them both cost-effective and environmentally friendly. Boasting a stringent SDCM (Standard Deviation of Color Matching) of less than 3, the PRO series ensures exceptional color consistency across all installations, providing uniform lighting that meets professional standards. With high brightness levels, these strips are perfect for demanding applications, such as retail displays, architectural accents, and task lighting. Durable and versatile, the PRO series combines advanced technology with unmatched reliability, making it the top choice for professionals seeking premium quality lighting.





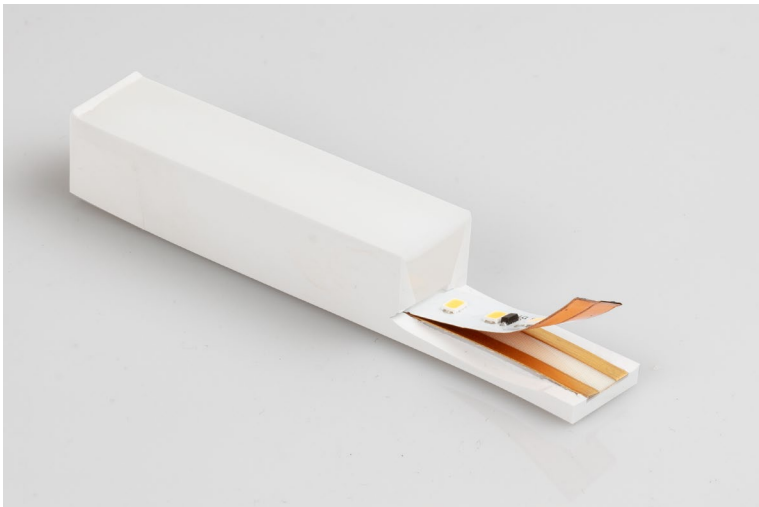


Customizable IP68 NEON FLEX

We are excited to announce that our NEON 1617 IP68 product is now fully customizable in size, with a maximum length of 14 meters, thanks to our state-of-the-art molding injection machine. This advancement enables us to meet diverse customer needs with precision and flexibility, providing tailored solutions without compromising the product's renowned durability and water resistance. Whether you require shorter sections for compact installations or longer lengths for extensive projects, our enhanced manufacturing capabilities ensure consistent quality and reliability across all custom sizes. Additionally, with the superior quality of materials used and the precision of our molding process, we guarantee that all our products maintain exceptional chlorine, alkaline, and UV resistance, ensuring long-lasting performance in even the harshest environments.

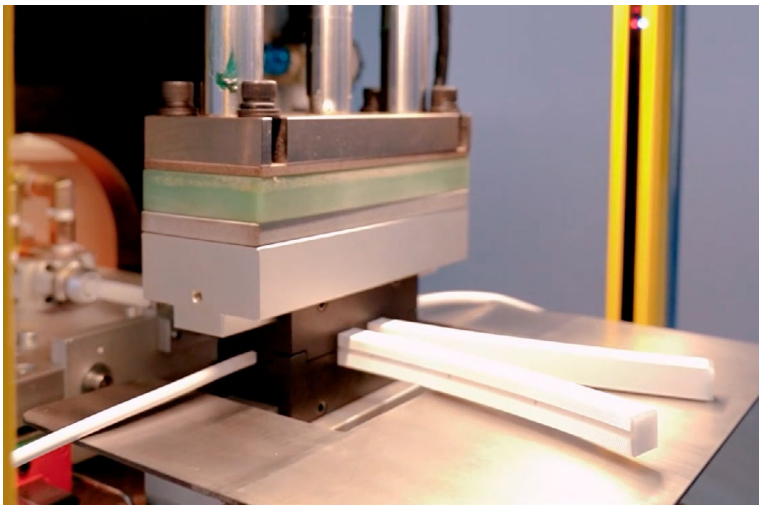

PAGE	MODEL	DC(V)	MAX. W/M	LM/W	LM/M (MAX)	CRI	CCT	LEDS/M		BENDING	UNIT CUT	FPS WIDTH	LENGHT	IP PROCESS	WARANTY
Architercture Neon															
470	Gomu 16x17	24	10	68	680	94	2700K3000K4000K	120		3D	50mm	16mm	10m	IP67	5 YEARS
472	Kema 16x16	24	16	71	1120	96	3000K4000KRGBW3000K	140		Top	67mm	16mm	30m	IP67	5 YEARS
473	Gomu 16x15	24	15	78	780	94	2700K3000K4000KRGBW4000K	120		Top	125mm	16mm	30m	IP67IP44	5 YEARS
474	Kema 10x18	24	14	34	494	96	3000KRGBRGBW3000K	140		Side	100mm	10mm	20m	IP67	5 YEARS
475	Gomu 12x20	24	15	56	560	95	2700K3000K4000KRGBW4000K	120		Side	50mm	12mm	17m	IP67IP44	5 YEARS
476	Gomu 10x10	24	10	77	765	94	2700K3000K4000K	168		Top	35.7mm	10mm	5m	IP67	5 YEARS
477	Kema 8x8	24	6	68	410	94	2700K3000K4000K	120		3D	29.4mm	8mm	5m	IP67	5 YEARS
478	Kema 6x6	24	8	95	756	92	2700K3000K4000K	240		Top	30mm	6mm	5m	IP67	5 YEARS
478	Kema 4x10	24	10	49	490	95	2700K3000K4000K	182		Top	38.5mm	4mm	5m	IP67	5 YEARS
479	Kema R18	24	12	64	766	97	3000K	360		3D	free	R18	5m	IP65	5 YEARS
479	Kema R23	24	14	68	955	96	3000K	280		3D	free	R23	5m	IP65	5 YEARS
Architercture Neon Underwater															
482	Gomu 16x17	24	10	64	670	94	2700K3000K4000KRGBW3000K	120		Top / Side	50mm	16mm	14m	IP68	5 YEARS
484	Kema 16x16	24	14	63	875	92	3000K4000K	120		Top	50mm	16mm	5m	IP68	5 YEARS
484	Kema 20x18 (Digital)	24	16	32	507	54	RGBW3000K	70		Top	100mm	20mm	5m	IP68	5 YEARS
485	Gomu 16x15	24	10	51	530	94	3000K	144		Top	50mm	16mm	5m	IP68	5 YEARS
490	Kema 10x18	24	14	42	590	95	3000K4000K	120		Side	50mm	10mm	5m	IP68	5 YEARS
490	Kema 12x20 (Digital)	24	16	33	532	94	RGBW3000K	70		Side	50mm	12mm	5m	IP68	5 YEARS
491	Gomu 12x20	24	10	37	389	94	3000K	144		Side	41.67m	12mm	5m	IP68	5 YEARS

PAGE	MODEL	DC(V)	MAX. W/M	LM/W	LM/M (MAX)	CRI	CCT	LEDS/M	UNIT CUT	FPS WIDTH	LENGHT	DIAGRAM (TYPE)	IP PROCESS	WARANTY
Led Strips - SILICON SMD														
490	Solid	24	12	108	1295	92	2700K 3000K 4000K	288	27.77mm	10mm	5m			5 YEARS
491	One	24	10	85	850	94	2700K 3000K 4000K	280	25mm	10mm	5m			5 YEARS
Led Strips - COB														
492	Vida	24	12	117	1400	91	2700K 3000K 4000K 6500K	480	50mm	12mm	5m			5 YEARS
493	Goro	24	10	132	1320	92	2700K 3000K 4000K	480	50mm	10mm	5m			5 YEARS
494	Goro COB	24	16	53	850	92	RGBW 3000K	848	33.3mm	12mm	5m			5 YEARS
496	Vida Slim	24	8	117	940	91	2700K 3000K 4000K 6500K	320	50mm	10mm	5m			5 YEARS
497	Honor Slim	24	9.6	102	980	93	2700K 3000K 4000K	120	50mm	8mm	5m			5 YEARS
498	Vida Ultra Slim	24	7	103	720	94	3000K 4000K	384	50mm	5mm	5m			5 YEARS
Led Strips - SMD														
500	Honor	24	14.4	102	1470	93	2700K 3000K 4000K	180	33.33mm	10mm	5m			5 YEARS
501	Aktis	24	14.4	84	1216	93	3000K 4000K	120	50mm	8mm	5m			5 YEARS
502	Honor Plus	24	19.2	102	1960	93	2700K 3000K 4000K	240	25mm	10mm	5m			5 YEARS
503	Honor Slim Plus	24	14.4	102	1470	94	3000K 4000K	180	33mm	8mm	5m			5 YEARS
504	Aktis Plus	24	19.2	98	1795	93	3000K 4000K	240	25mm	10mm	5m			5 YEARS
506	Como He	24	14	162	2270	92	3000K 4000K	128	62.5mm	10mm	5m			5 YEARS
507	Performance He	24	7	186	1300	92	3000K 4000K	180	62.5mm	10mm	5m			5 YEARS
508	Free He	24	12	95	1140	90	2700K 3000K 4000K	180	free	6mm	5m			5 YEARS
509	Honor 48V	48	8	99	790	93	2700K 3000K 4000K	130	50mm	12mm	50m			2 YEARS
510	Honor HV	220-230	9	92	825	80	2700K 3000K 4000K	120	1000mm	14mm	50m			2 YEARS
511	Vida HV	220-230	8	75	600	70	2700K 3000K 4000K	288	1000mm	12mm	50m			2 YEARS
512	D2W	24	10	110	1100	90	1900K 3000K	168	83mm	10mm	5m			5 YEARS
513	TW	24	19.2	53	1010	80	2700K 6000K	120	50mm	10mm	5m			5 YEARS
Silicon Wallwashers														
516	Bine	24	25	84	2108	94	3000K 4000K	24	41.6mm	24mm	5m			5 YEARS
517	Diamond	24	80	83	6653	83	3000K 4000K	20	50mm	22mm	2.4m			5 YEARS



ARCHITECTURE
NEON FLEX

FACADE LIGHTING

- 1. Side / top / 3D bend
- 2. IP44 / IP65 / IP67 protection
with no dark spot
- 3. Multiple CCT, DMX
- 4. Neon profileless
- 5. Voltage 24Vdc


UNDER WATER

- 1. Side / top bend optional
- 2. IP68 / IK10 protection
- 3. Multiple CCT, DMX/SPI
- 4. Voltage 24Vdc

Gomu 16x17 3D PRO



- IP67 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance

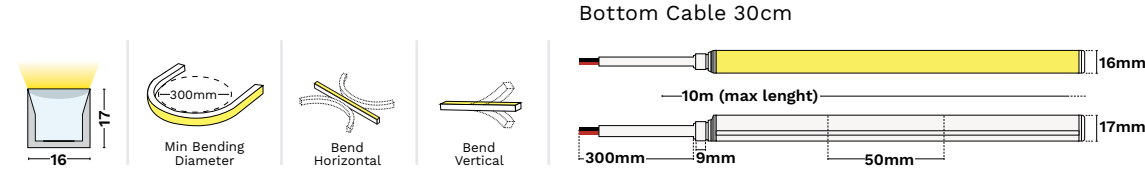

CODE	CCT	W/M	LM/M	LM/W	SDCM	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9530026	2700K	10	650	65	<3	50mm	10m ¹	16 x 17mm	10m
9530028	3000K	10	660	66	<3	50mm	10m ¹	16 x 17mm	10m
9530029	4000K	10	680	68	<3	50mm	10m ¹	16 x 17mm	10m



¹For customized lengths, pricing may vary depending on the number of pieces, lengths, and type of end caps required. Please contact our sales team for detailed information and a personalized offer.

COMMON ACCESSORIES			
Silicone input cap	Silicone end cap	Aluminium profile 1m	Aluminium bending profile
9530030	9530031	9540428	9540429

*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices.



Kema 16x16

ESSENTIAL



- IP67 protection level
- UV resistance
- Salt solution resistance



STANDARD VERSION

CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540144	3000K	16	1096	69	50mm	5m	16 x 16mm	5m
9540145	4000K	16	1120	71	50mm	5m	16 x 16mm	5m




LONG VERSION


CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540154	3000K	6	365	61	50mm	30m ¹	16 x 16mm	30m



¹For customized lengths, pricing may vary depending on the number of pieces, lengths, and type of end caps required. Please contact our sales team for detailed information and a personalized offer.

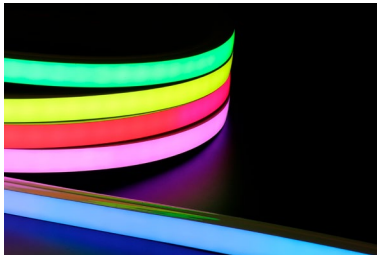

- IP67 protection level
- UV resistance
- Salt solution resistance

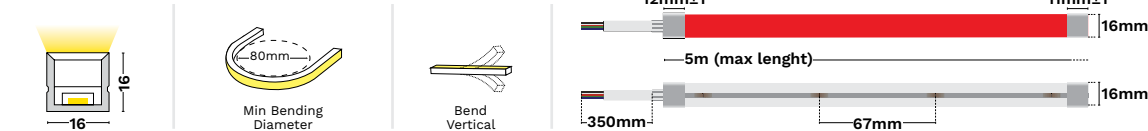

RGBW


CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540164	RGBW-3000K	16	727	46	67mm	5m	16 x 16mm	5m




COMMON ACCESSORIES						
Input cap (Straight Outlet)	Input cap (Side Outlet)	DIY End cap	Bracket	Aluminium Profile 1m	Aluminium Profile 2m	Aluminium Profile 1m (for intergrated end cap)
9540146	9540147	9540148	9540149	9540151	9540152	9540153

Gomu 16x15

PRO

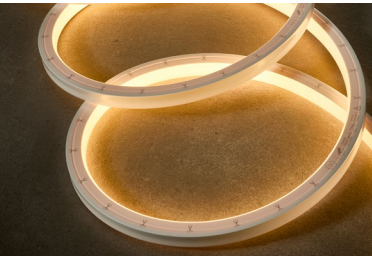


- IP67 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance

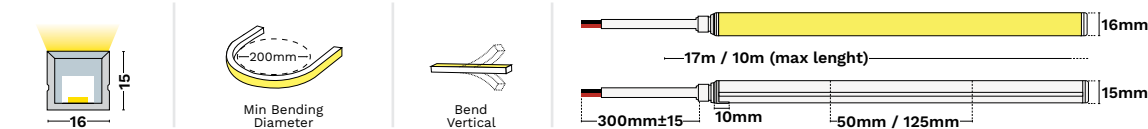

Bottom Cable Entry 300cm

STANDARD

CODE	CCT	W/M	LM/M	LM/W	SDCM	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9530011	2700K	10	740	74	<3	50mm	17m ¹	16 x 15mm	17m (DIY cap 10m)
9540010	3000K	10	765	77	<3	50mm	17m ¹	16 x 15mm	17m (DIY cap 10m)
9530012	4000K	10	780	78	<3	50mm	17m ¹	16 x 15mm	17m (DIY cap 10m)
9540011	RGBW-4000K	15	440	26	-	125mm	10m ¹	16 x 15mm	10m (DIY cap 4,8m)



¹For customized lengths, pricing may vary depending on the number of pieces, lengths, and type of end caps required. Please contact our sales team for detailed information and a personalized offer.

LONG VERSION

CODE	CCT	W/M	LM/M	LM/W	SDCM	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540058	3000K	5	365	73	<3	50mm	30m ¹	16 x 15mm	30m



¹For customized lengths, pricing may vary depending on the number of pieces, lengths, and type of end caps required. Please contact our sales team for detailed information and a personalized offer.

COMMON ACCESSORIES				SINGLE COLOR			RGBW
Aluminium Profile 1m	Curved Profile 0.5m	Closed Endcap	Mounting Clips	Screwless input cap	Normal input cap	Middle Connector	Screwless input cap
9540012	9540013	9530016 9540017	9540014	9540015	9530014	9530025	9540016 9530015



- IP44 protection level



EMBEDDED VERSION - NO PROFILE

CODE	CCT	W/M	LM/M	LM/W	SDCM	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9530045	2700K	10	633	63	<3	50mm	17m ¹	16 x 15	17 (DIY cap 10)
9540046	3000K	10	660	66	<3	50mm	17m ¹	16 x 15	17 (DIY cap 10)
9530047	4000K	10	669	67	<3	50mm	17m ¹	16 x 15	17 (DIY cap 10)



¹For customized lengths, pricing may vary depending on the number of pieces, lengths, and type of end caps required. Please contact our sales team for detailed information and a personalized offer.

ACCESSORIES	
Silicone input cap	Silicone end cap
9540047	9540048





*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices.

Kema 10x18

ESSENTIAL



- IP67 protection level
- UV resistance
- Salt solution resistance



STANDARD VERSION

CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540166	3000K	14	494	34	50mm	5m	10 x 18mm	5m




LONG VERSION





CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540165	3000K	10	344	34	50mm	20m ¹	10 x 18mm	20m



¹For customized lengths, pricing may vary depending on the number of pieces, lengths, and type of end caps required. Please contact our sales team for detailed information and a personalized offer.




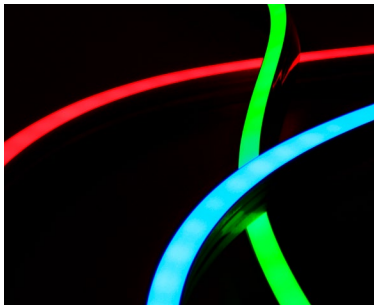


- IP67 protection level
- UV resistance
- Salt solution resistance



RGB

CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540169	RGB	14	170	12	50mm	5m	10 x 18mm	5m



RGBW

CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540173	RGBW-3000K	14	270	19	100mm	5m	10 x 18mm	5m






COMMON ACCESSORIES					SINGLE COLOR ACCESSORIES						RGBW	
End Cap	Bracket	Aluminium Profile	Aluminium Profile (for intergrated end cap) 1m	Stainless steel bendable profile	DIY Input cap (Straight Outlet)	DIY Input cap (Side Outlet)	DIY End Cap	Input cap (Straight Outlet)	Input cap (Bottom Outlet)	Input cap (Side Outlet)	Input cap (Straight Outlet)	Input cap (Side Outlet)
9540178	9540179	1m 9540181 2m 9540182	9540183	0.5m 9540184 1m 9540185	9540167	9540168	9540174	9540175	9540176	9540177	9540171	9540171

Gomu 12x20


PRO



- IP67 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance



Bottom Cable 30cm

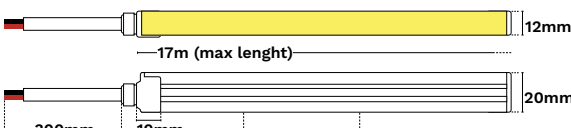

STANDARD

CODE	CCT	W/M	LM/M	LM/W	SDCM	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9530017	2700K	10	520	52	<3	50mm	17m ¹	12 x 20mm	12m (DIY cap 10)
9540018	3000K	10	535	54	<3	50mm	17m ¹	12 x 20mm	12m (DIY cap 10)
9530019	4000K	10	560	56	<3	50mm	17m ¹	12 x 20mm	12m (DIY cap 10)
9540019	RGBW-4000K	15	305	20	-	50mm	10m ¹	12 x 20mm	10m (DIY cap 4.8)







¹For customized lengths, pricing may vary depending on the number of pieces, lengths, and type of end caps required. Please contact our sales team for detailed information and a personalized offer.

COMMON ACCESSORIES			SINGLE COLOR ACCESSORIES						RGBW	
Aluminium Profile 1m	Curved Profile 0.5m	Mounting Clips	DIY W Endcap	DIY W Endcap	Closed Endcap	Closed Endcap with screws	Closed Endcap		Mounting Clips	DIY RGBW Endcap
9540020	9540021	9540022	9530022	9530021	9540025	9530023	9530024		9540045	9540024



- IP44 protection level

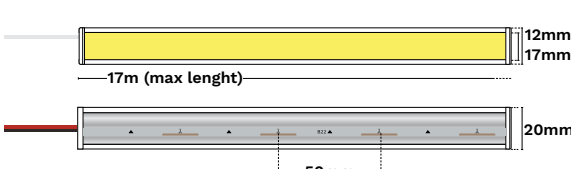

EMBEDDED VERSION - NO PROFILE

CODE	CCT	W/M	LM/M	LM/W	SDCM	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9530048	2700K	10	400	40	<3	50mm	17m ¹	12 x 20mm	12m (DIY cap 10)
9540049	3000K	10	410	41	<3	50mm	17m ¹	12 x 20mm	12m (DIY cap 10)
9530050	4000K	10	430	43	<3	50mm	17m ¹	12 x 20mm	12m (DIY cap 10)




¹For customized lengths, pricing may vary depending on the number of pieces, lengths, and type of end caps required. Please contact our sales team for detailed information and a personalized offer.

ACCESSORIES	
Silicone end cap	Silicone closed end cap
9540050	9540051


*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices.

Gomu 10x10

PRO

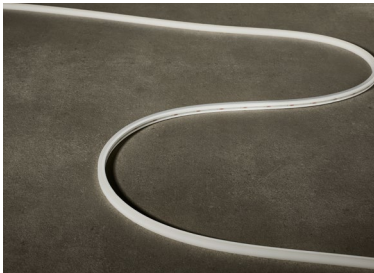

- IP67 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance

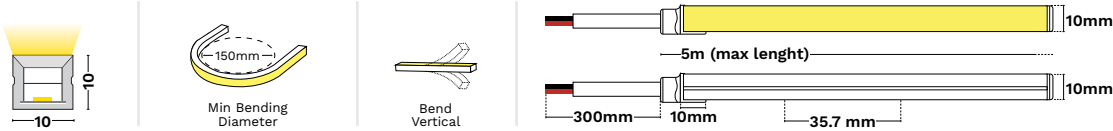

CODE	CCT	W/M	LM/M	LM/W	SDCM	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9530051	2700K	10	740	74	<3	35.7mm	5m	10 x 10mm	5m
9540026	3000K	10	750	75	<3	35.7mm	5m	10 x 10mm	5m
9530027	4000K	10	765	77	<3	35.7mm	5m	10 x 10mm	5m




ACCESSORIES						
Plastic Profile 1m	Mounting Clips	Silicone End Cap	Slicone Closed End Cap	Solder Free End Cap	Assembled Closed End Cap	Aluminium bending profile 1m
9540027	9540028	9540029 9530040	9540030 9530041	9530042	9530043	9540422

Kema 8x8 3D

ESSENTIAL



- IP67 protection level
- UV resistance
- Salt solution resistance

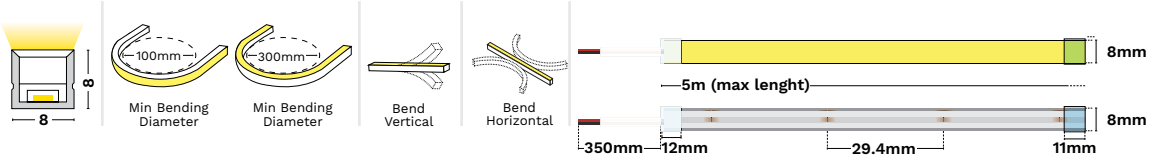

CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540123	2700K	6	385	64	29.4mm	5m	8 x 8mm	5m
9540124	3000K	6	390	65	29.4mm	5m	8 x 8mm	5m
9540125	4000K	6	410	68	29.4mm	5m	8 x 8mm	5m



ACCESSORIES				
Aluminium Profile 1m	Mounting Clips	Stainless steel bendable profile 1m	End Cap	Input cap (Straight Outlet)
9540126	9540127	9540128	9540129	9540131





*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices.

Kema 6x6

ESSENTIAL



- IP67 protection level
- UV resistance
- Acids & alkalis resistance
- Salt solution resistance



CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540114	2700K	8	700	88	30mm	5m	6 x 6mm	5m
9540115	3000K	8	731	91	30mm	5m	6 x 6mm	5m
9540116	4000K	8	756	95	30mm	5m	6 x 6mm	5m






COMMON ACCESSORIES				
Input cap (Straight Outlet)	Input cap (Bottom/ Side Outlet)	End cap	Bracket	Aluminium Profile 1m
9540117	9540118	9540119	9540121	9540122

Kema 4x10

ESSENTIAL



- IP67 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance



CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540107	2700K	10	393	39	38.5mm	5m	4 x 10mm	5m
9540108	3000K	10	425	43	38.5mm	5m	4 x 10mm	5m
9540109	4000K	10	490	49	38.5mm	5m	4 x 10mm	5m





COMMON ACCESSORIES		
Bracket	Aluminium Profile 1m	Aluminium Profile 2m
9540111	9540112	9540113

Kema R18

ESSENTIAL



- IP65 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance



CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540155	3000K	12	766	64	Free	5m	R:18	5m





R18 ACCESSORIES						R23 ACCESSORIES		
Input cap	End cap	Plastic Bracket (clips)	Input cap	End cap	Plastic Bracket (clips)	Input cap	End cap	Plastic Bracket (clips)
9540156	9540157	9540158	9540161	9540162	9540163			

Kema R23

ESSENTIAL



- IP65 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance



CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540159	3000K	14	955	68	Free	5m	R:23	5m



*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices.



UNDERWATER



- 01. SIDE / TOP BEND OPTIONAL
 - 02. IP68 / IK10 PROTECTION
 - 03. MULTIPLE CCT, DMX / SPI
-

Gomu 16x17

PRO UNDERWATER



- IP68 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance




CODE	CCT	W/M	LM/M	LM/W	SDCM	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9530052	2700K	10	610	64	<3	50mm	14m ¹	16 x 17mm	14m
9530035	3000K	10	639	64	<3	50mm	14m ¹	16 x 17mm	14m
9530053	4000K	10	670	64	<3	50mm	14m ¹	16 x 17mm	14m
9530054	RGBW-3000K	10	334	64	<3	50mm	14m ¹	16 x 17mm	14m



¹For customized lengths, pricing may vary depending on the number of pieces, lengths, and type of end caps required. Please contact our sales team for detailed information and a personalized offer.



- IP68 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance

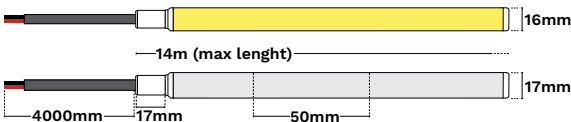

CODE	CCT	W/M	LM/M	LM/W	SDCM	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9530038	3000K	10	572	57	<3	50mm	14m ¹	16 x 17mm	14m



¹For customized lengths, pricing may vary depending on the number of pieces, lengths, and type of end caps required. Please contact our sales team for detailed information and a personalized offer.

COMMON ACCESSORIES

Plastic
Profile 1m



9530020

Mounting
Clip




9530013

*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices.






Kema 16x16

ESSENTIAL

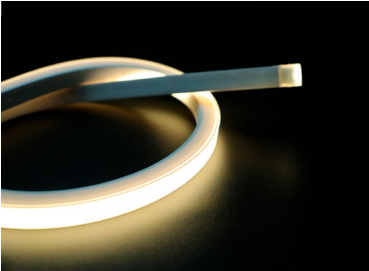

- IP68 protection level
- Salt solution resistance
- UV resistance



CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540132	3000K	14	759	54	50mm	5m	16 x 16mm	5m
9540133	4000K	14	875	63	50mm	5m	16 x 16mm	5m







ACCESSORIES			
Bracket	Aluminium Profile 1m	Aluminium Profile 2m	Aluminium Profile 1m (for intergrated end cap)
9540149	9540151	9540152	9540153

Kema 20x18

ESSENTIAL



- IP68 protection level
- Salt solution resistance
- UV resistance
- SPI

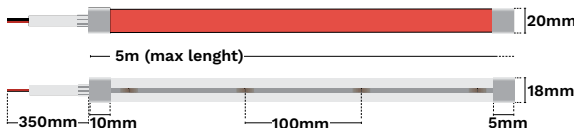

DIGITAL RGBW


CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540134	RGBW-3000K	16	507	32	100mm	5m	20 x 18mm	5m





ACCESSORIES				
Input cap (Straight Outlet)	End cap	Input cap (Bottom/Side Outlet)	Bracket	Aluminium Profile 1m
9540135	9540136	9540137	9540138	9540139

Gomu 16x15


PRO

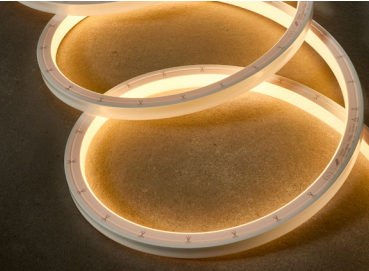

- IP68 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance



Bottom Cable Entry 200cm



CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540035	3000K	10	530	51	50mm	1m	16 x 15mm	1m
9540036	3000K	10	530	51	50mm	2m	16 x 15mm	2m
9540037	3000K	10	530	51	50mm	3m	16 x 15mm	3m
9540038	3000K	10	530	51	50mm	5m	16 x 15mm	5m



ACCESSORIES	
Plastic Profile 1m	Mounting Clips
9540039	9540040




*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices.

Kema 10x18

ESSENTIAL



- IP68 protection level
- UV resistance

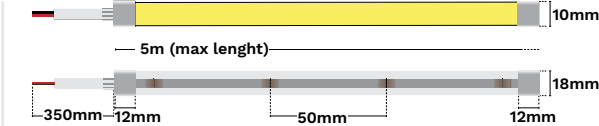

CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540141	3000K	14	578	41	50mm	5m	10 x 18mm	5m
9540142	4000K	14	590	42	50mm	5m	10 x 18mm	5m






ACCESSORIES				
End Cap	Bracket	Aluminium Profile	Aluminium Profile (for intergrated end cap) 1m	Stainless steel bendable profile
				
9540178	9540179	1m 9540181 2m 9540182	9540183	0.5m 9540184 1m 9540185

Kema 12x20

ESSENTIAL



- IP68 protection level
- Salt solution resistance
- UV resistance
- SPI

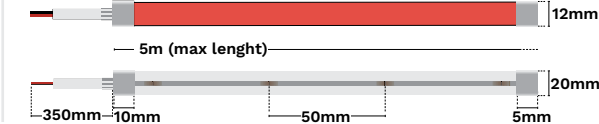

DIGITAL RGBW

CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540143	RGBW-3000K	16	532	33	50mm	5m	12 x 20mm	5m




*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices.

Gomu 12x20


PRO



- IP68 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance



Bottom Cable Entry 200cm

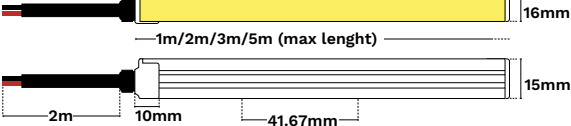

CODE	CCT	W/M	LM/M	LM/W	SDCM	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540041	3000K	10	389	37	<3	41.67mm	1m	12 x 20mm	1m
9540042	3000K	10	389	37	<3	41.67mm	2m	12 x 20mm	2m
9540043	3000K	10	389	37	<3	41.67mm	3m	12 x 20mm	3m
9540044	3000K	10	389	37	<3	41.67mm	5m	12 x 20mm	5m



ACCESSORIES
Mounting Clips

9540045





LED STRIPS
COB / SMD

LED STRIPS


1. SMD series
2. COB series
3. Silicon series
4. High voltage series
5. High efficiency
6. Broad range of IP protection

Solid

ESSENTIAL

BASIC PARAMETERS

TYPE OF CHIP	SMD
POWER	12 W/m
VOLTAGE	24Vdc
LEDS/M	288
LEDS DISTANCE	-
CUTTING UNIT	27.77mm
CRI (Ra)	92
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	180°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm
HEIGHT	5mm

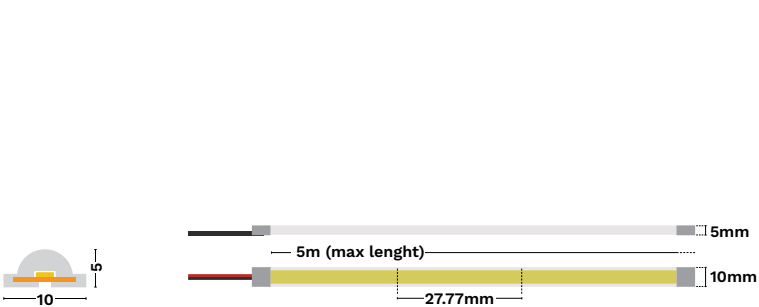


*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices.

Ten

PRO

BASIC PARAMETERS

TYPE OF CHIP	SMD
POWER	10 W/m
VOLTAGE	24Vdc
LEDS/M	280
LEDS DISTANCE	-
CUTTING UNIT	25mm
CRI (Ra)	94
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	180°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm
HEIGHT	6mm

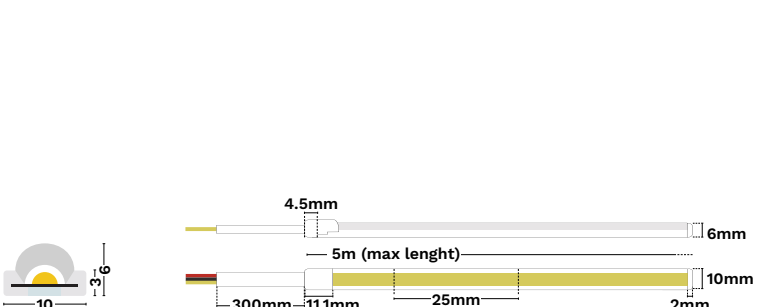




ACCESSORIES		
Mounting Clip	Input Silicone Cap	Silicone closed end cap
9540032	9540033	9540034

Vida

ESSENTIAL

BASIC PARAMETERS

TYPE OF CHIP	COB
POWER	12 W/m
VOLTAGE	24Vdc
LEDS/M	480
LEDS DISTANCE	-
CUTTING UNIT	50mm
CRI (Ra)	91
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	180°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm / 12mm
HEIGHT	2.2mm / 4.5mm




Goro

PRO


BASIC PARAMETERS

TYPE OF CHIP	COB
POWER	10 W/m
VOLTAGE	24Vdc
LEDS/M	480
LEDS DISTANCE	-
CUTTING UNIT	50mm
CRI (Ra)	92
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	180°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm
HEIGHT	1.8mm



PHOTOMETRIC PARAMETERS				
IP	CODE	CCT	LUMEN/M	LUMEN/W
IP20	9540063	2700K	1016	87
	9540064	3000K	1203	100
	9540065	4000K	1368	114
	9680303	6500K	1400	117
IP65	9540069	2700K	1057	88
	9540070	3000K	1353	113
	9540071	4000K	1156	96
IP68	9540072	2700K	1107	92
	9540073	3000K	1065	89
	9540074	4000K	1356	113

*Common Aluminium profiles can be used for the installation
see page 62-63


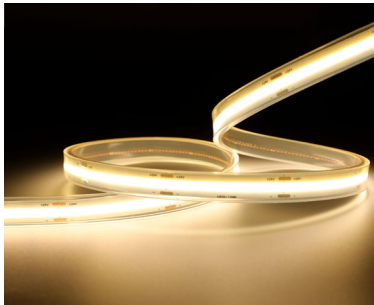


Goro COB RGBW PRO

PHOTOMETRIC PARAMETERS				
IP	CODE	CCT	LUMEN/M	LUMEN/W
IP20	9540420	RGBW-3000K	850	53
IP65	9540421	RGBW-3000K	820	51

*Common Aluminium profiles can be used for the installation
see page 62-63

BASIC PARAMETERS	
TYPE OF CHIP	COB
POWER	16 W/m
VOLTAGE	24Vdc
LEDS/M	848 / 820
LEDS DISTANCE	-
CUTTING UNIT	33.3mm
CRI (Ra)	92
SDCM CHIP	N/A
SDCM (final product)	N/A
BEAM ANGLE	180°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	12mm
HEIGHT	1.8mm



*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices.





Vida Slim

ESSENTIAL

PHOTOMETRIC PARAMETERS						BASIC PARAMETERS	
POWER	IP	CODE	CCT	LUMEN/M	LUMEN/W	TYPE OF CHIP	COB
4.8W	IP20	9680300	2700K	480	95	POWER	4.8 W/m / 8 W/m
		9680301	3000K	520	108	VOLTAGE	24Vdc
		9680302	4000K	546	114	LEDS/M	320
8W	IP20	9540060	2700K	755	95	LEDS DISTANCE	-
		9540061	3000K	833	105	CUTTING UNIT	50mm
		9540062	4000K	916	115	CRI (Ra)	91
	IP65	9540066	2700K	781	98	SDCM CHIP	<3
		9540067	3000K	867	108	SDCM (final product)	<3
		9540068	4000K	931	116	BEAM ANGLE	180°
		9680304	6500K	940	117	DIMMING TYPE	TRIAC / Dali 2 / 0-10
*Common Aluminium profiles can be used for the installation see page 62-63						LIFETIME	>54000
						WARRANTY	5 Years
						WORKING TEMP	-25°C – 45°C
						MAX LENGHT (single input)	5m
						LENGHT/REEL	5m
						WIDTH	8mm / 10mm
						HEIGHT	2mm / 2.4mm

*Common Aluminium profiles can be used for the installation
see page 62-63





*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust.
Failure to use IP68 connectors may void the product warranty due to improper installation practices.

Honor Slim

ESSENTIAL

PHOTOMETRIC PARAMETERS					BASIC PARAMETERS	
IP	CODE	CCT	LUMEN/M	LUMEN/W	TYPE OF CHIP	SMD
IP20	9540088	2700K	910	95	POWER	9.6 W/m
	9540089	3000K	960	100	VOLTAGE	24Vdc
	9540090	4000K	980	102	LEDS/M	120
IP62	9540091	2700K	783	82	LEDS DISTANCE	8.3mm
	9540092	3000K	870	91	CUTTING UNIT	50mm
	9540093	4000K	946	100	CRI (Ra)	93
					SDCM CHIP	<3
					SDCM (final product)	<3
					BEAM ANGLE	120°
					DIMMING TYPE	TRIAC / Dali 2 / 0-10
					LIFETIME	>54000
					WARRANTY	5 Years
					WORKING TEMP	-25°C - 45°C
					MAX LENGHT (single input)	5m
					LENGHT/REEL	5m
					WIDTH	8mm
					HEIGHT	1.4mm / 2.8mm

*Common Aluminium profiles can be used for the installation
see page 62-63




Vida Ultra Slim

ESSENTIAL

PHOTOMETRIC PARAMETERS				
IP	CODE	CCT	LUMEN/M	LUMEN/W
IP20	9680312	3000K	100	700
	9680313	4000K	103	720

*Common Aluminium profiles can be used for the installation
see page 62-63

BASIC PARAMETERS	
TYPE OF CHIP	COB
POWER	7 W/m
VOLTAGE	24Vdc
LEDS/M	384
LEDS DISTANCE	-
CUTTING UNIT	50mm
CRI (Ra)	94
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	5mm
HEIGHT	1.4mm



*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices.





Honor

ESSENTIAL

BASIC PARAMETERS

TYPE OF CHIP	SMD
POWER	14.4 W/m
VOLTAGE	24Vdc
LEDS/M	180
LEDS DISTANCE	5.6mm
CUTTING UNIT	33.3mm
CRI (Ra)	93
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm
HEIGHT	1.4mm / 2.4mm

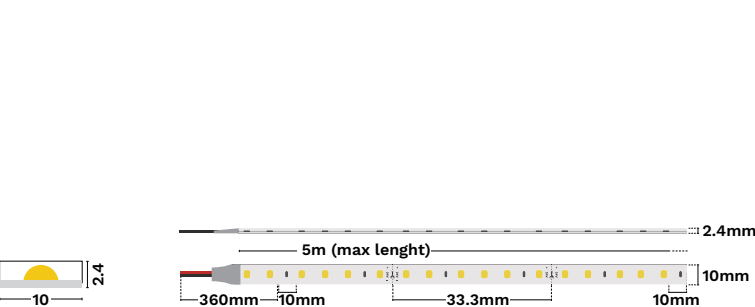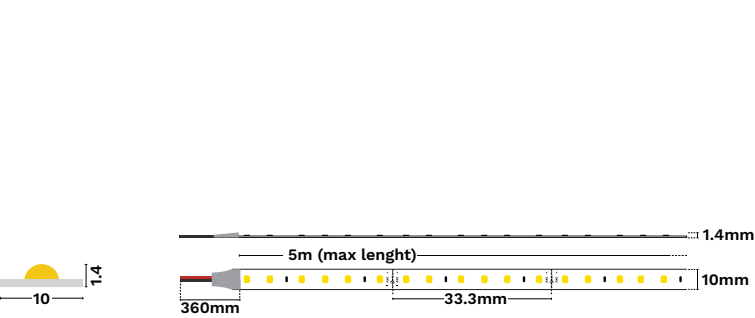


Aktis

ESSENTIAL

BASIC PARAMETERS

TYPE OF CHIP	SMD
POWER	14.4 W/m
VOLTAGE	24Vdc
LEDS/M	120
LEDS DISTANCE	-
CUTTING UNIT	50mm
CRI (Ra)	93
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	8mm
HEIGHT	2mm

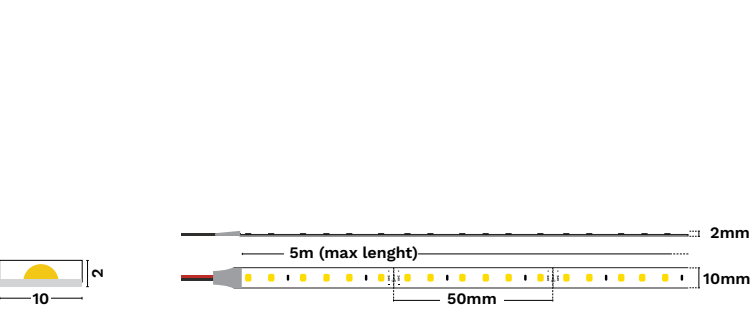


Honor Plus

ESSENTIAL

BASIC PARAMETERS

TYPE OF CHIP	SMD
POWER	19.2W/m
VOLTAGE	24Vdc
LEDS/M	240
LEDS DISTANCE	4.2mm
CUTTING UNIT	25mm
CRI (Ra)	93
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm
HEIGHT	1.4mm

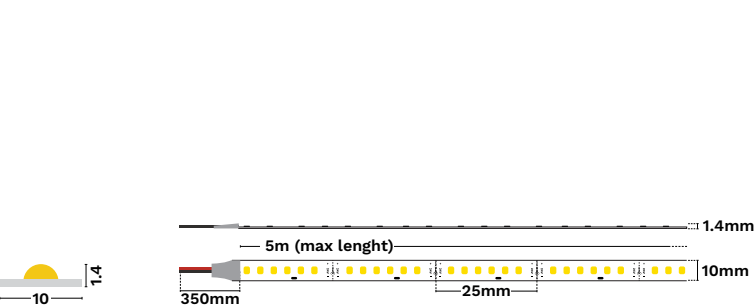


Honor Slim Plus

ESSENTIAL

BASIC PARAMETERS

TYPE OF CHIP	SMD
POWER	14.4W/m
VOLTAGE	24Vdc
LEDS/M	180
LEDS DISTANCE	-
CUTTING UNIT	33mm
CRI (Ra)	94
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	8mm
HEIGHT	1.4mm

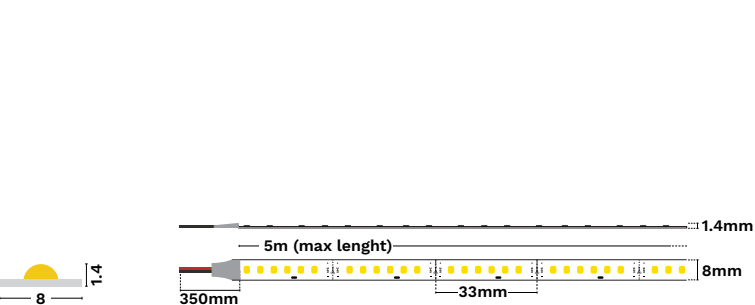


Aktis Plus

ESSENTIAL

PHOTOMETRIC PARAMETERS				
IP	CODE	CCT	LUMEN/M	LUMEN/W
IP20	9540055	3000K	1633	89
	9540056	4000K	1795	98

*Common Aluminium profiles can be used for the installation
see page 62-63


BASIC PARAMETERS	
TYPE OF CHIP	SMD
POWER	19.2 W/m
VOLTAGE	24Vdc
LEDS/M	240
LEDS DISTANCE	-
CUTTING UNIT	25mm
CRI (Ra)	93
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm
HEIGHT	2mm



COMO HE PRO

BASIC PARAMETERS


TYPE OF CHIP	SMD
POWER	14 W/m
VOLTAGE	24Vdc
LEDS/M	128
LEDS DISTANCE	7.8mm
CUTTING UNIT	62.5mm
CRI (Ra)	92
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm
HEIGHT	1.4mm



PERFORMANCE HE PRO

BASIC PARAMETERS

TYPE OF CHIP	SMD
POWER	7 W/m
VOLTAGE	24Vdc
LEDS/M	180
LEDS DISTANCE	5.56mm
CUTTING UNIT	62.5mm
CRI (Ra)	92
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm
HEIGHT	2.1mm





Free HE

PRO

BASIC PARAMETERS

TYPE OF CHIP	SMD
POWER	12 W/m
VOLTAGE	24Vdc
LEDS/M	180
LEDS DISTANCE	-
CUTTING UNIT	free
CRI (Ra)	90
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	6mm
HEIGHT	1.4mm

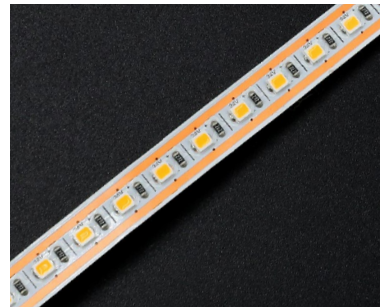



Honor 48V Long

PRO

BASIC PARAMETERS

TYPE OF CHIP	SMD
POWER	8 W/m
VOLTAGE	DC48V
LEDS/M	130
LEDS DISTANCE	-
CUTTING UNIT	50mm
CRI (Ra)	93
SDCM CHIP	<2
SDCM (final product)	<2
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	50m
LENGHT/REEL	50m
WIDTH	10mm / 12mm
HEIGHT	1.4mm / 2.4mm




*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices.

Honor High Voltage

ESSENTIAL

BASIC PARAMETERS

TYPE OF CHIP	COB
POWER	9 W/m
VOLTAGE	220-230V
LEDS/M	120
LEDS DISTANCE	-
CUTTING UNIT	1000mm
CRI (Ra)	80
SDCM CHIP	<5
SDCM (final product)	<5
BEAM ANGLE	120°
DIMMING TYPE	N/A
LIFETIME	>34000
WARRANTY	2 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	50m
LENGHT/REEL	50m
WIDTH	14mm
HEIGHT	4.5mm



ACCESSORIES

WATERPROOF INPUT PLUG WITH 30CM CABLES
FOR 230V SMD
10MM PCB
2PIN, MAX CURRENT:6A




9680314

Vida High Voltage

ESSENTIAL

BASIC PARAMETERS

TYPE OF CHIP	COB
POWER	8 W/m
VOLTAGE	220-230V
LEDS/M	288
LEDS DISTANCE	-
CUTTING UNIT	1000mm
CRI (Ra)	70
SDCM CHIP	<5
SDCM (final product)	<5
BEAM ANGLE	120°
DIMMING TYPE	N/A
LIFETIME	>34000
WARRANTY	2 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	50m
LENGHT/REEL	50m
WIDTH	12mm
HEIGHT	6mm




D2W

ESSENTIAL

BASIC PARAMETERS

TYPE OF CHIP	SMD
POWER	10 W/m
VOLTAGE	24Vdc
LEDS/M	168
LEDS DISTANCE	-
CUTTING UNIT	83mm
CRI (Ra)	90
SDCM CHIP	<5
SDCM (final product)	<5
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm
HEIGHT	2.1mm



TW

ESSENTIAL


PHOTOMETRIC PARAMETERS


IP	CODE	CCT	LUMEN/M	LUMEN/W
IP20	9621537	2700K- 6000K	880	46
	9621538	2700K- 6000K	1010	53

*Common Aluminium profiles can be used for the installation
see page 62-63

BASIC PARAMETERS

TYPE OF CHIP	SMD2835/3527
POWER	19.2 W/m
VOLTAGE	24Vdc
LEDS/M	120
LEDS DISTANCE	-
CUTTING UNIT	50mm
CRI (Ra)	80
SDCM CHIP	<5
SDCM (final product)	<5
BEAM ANGLE	120°
DIMMING TYPE	Dali 2
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm
HEIGHT	2.1mm



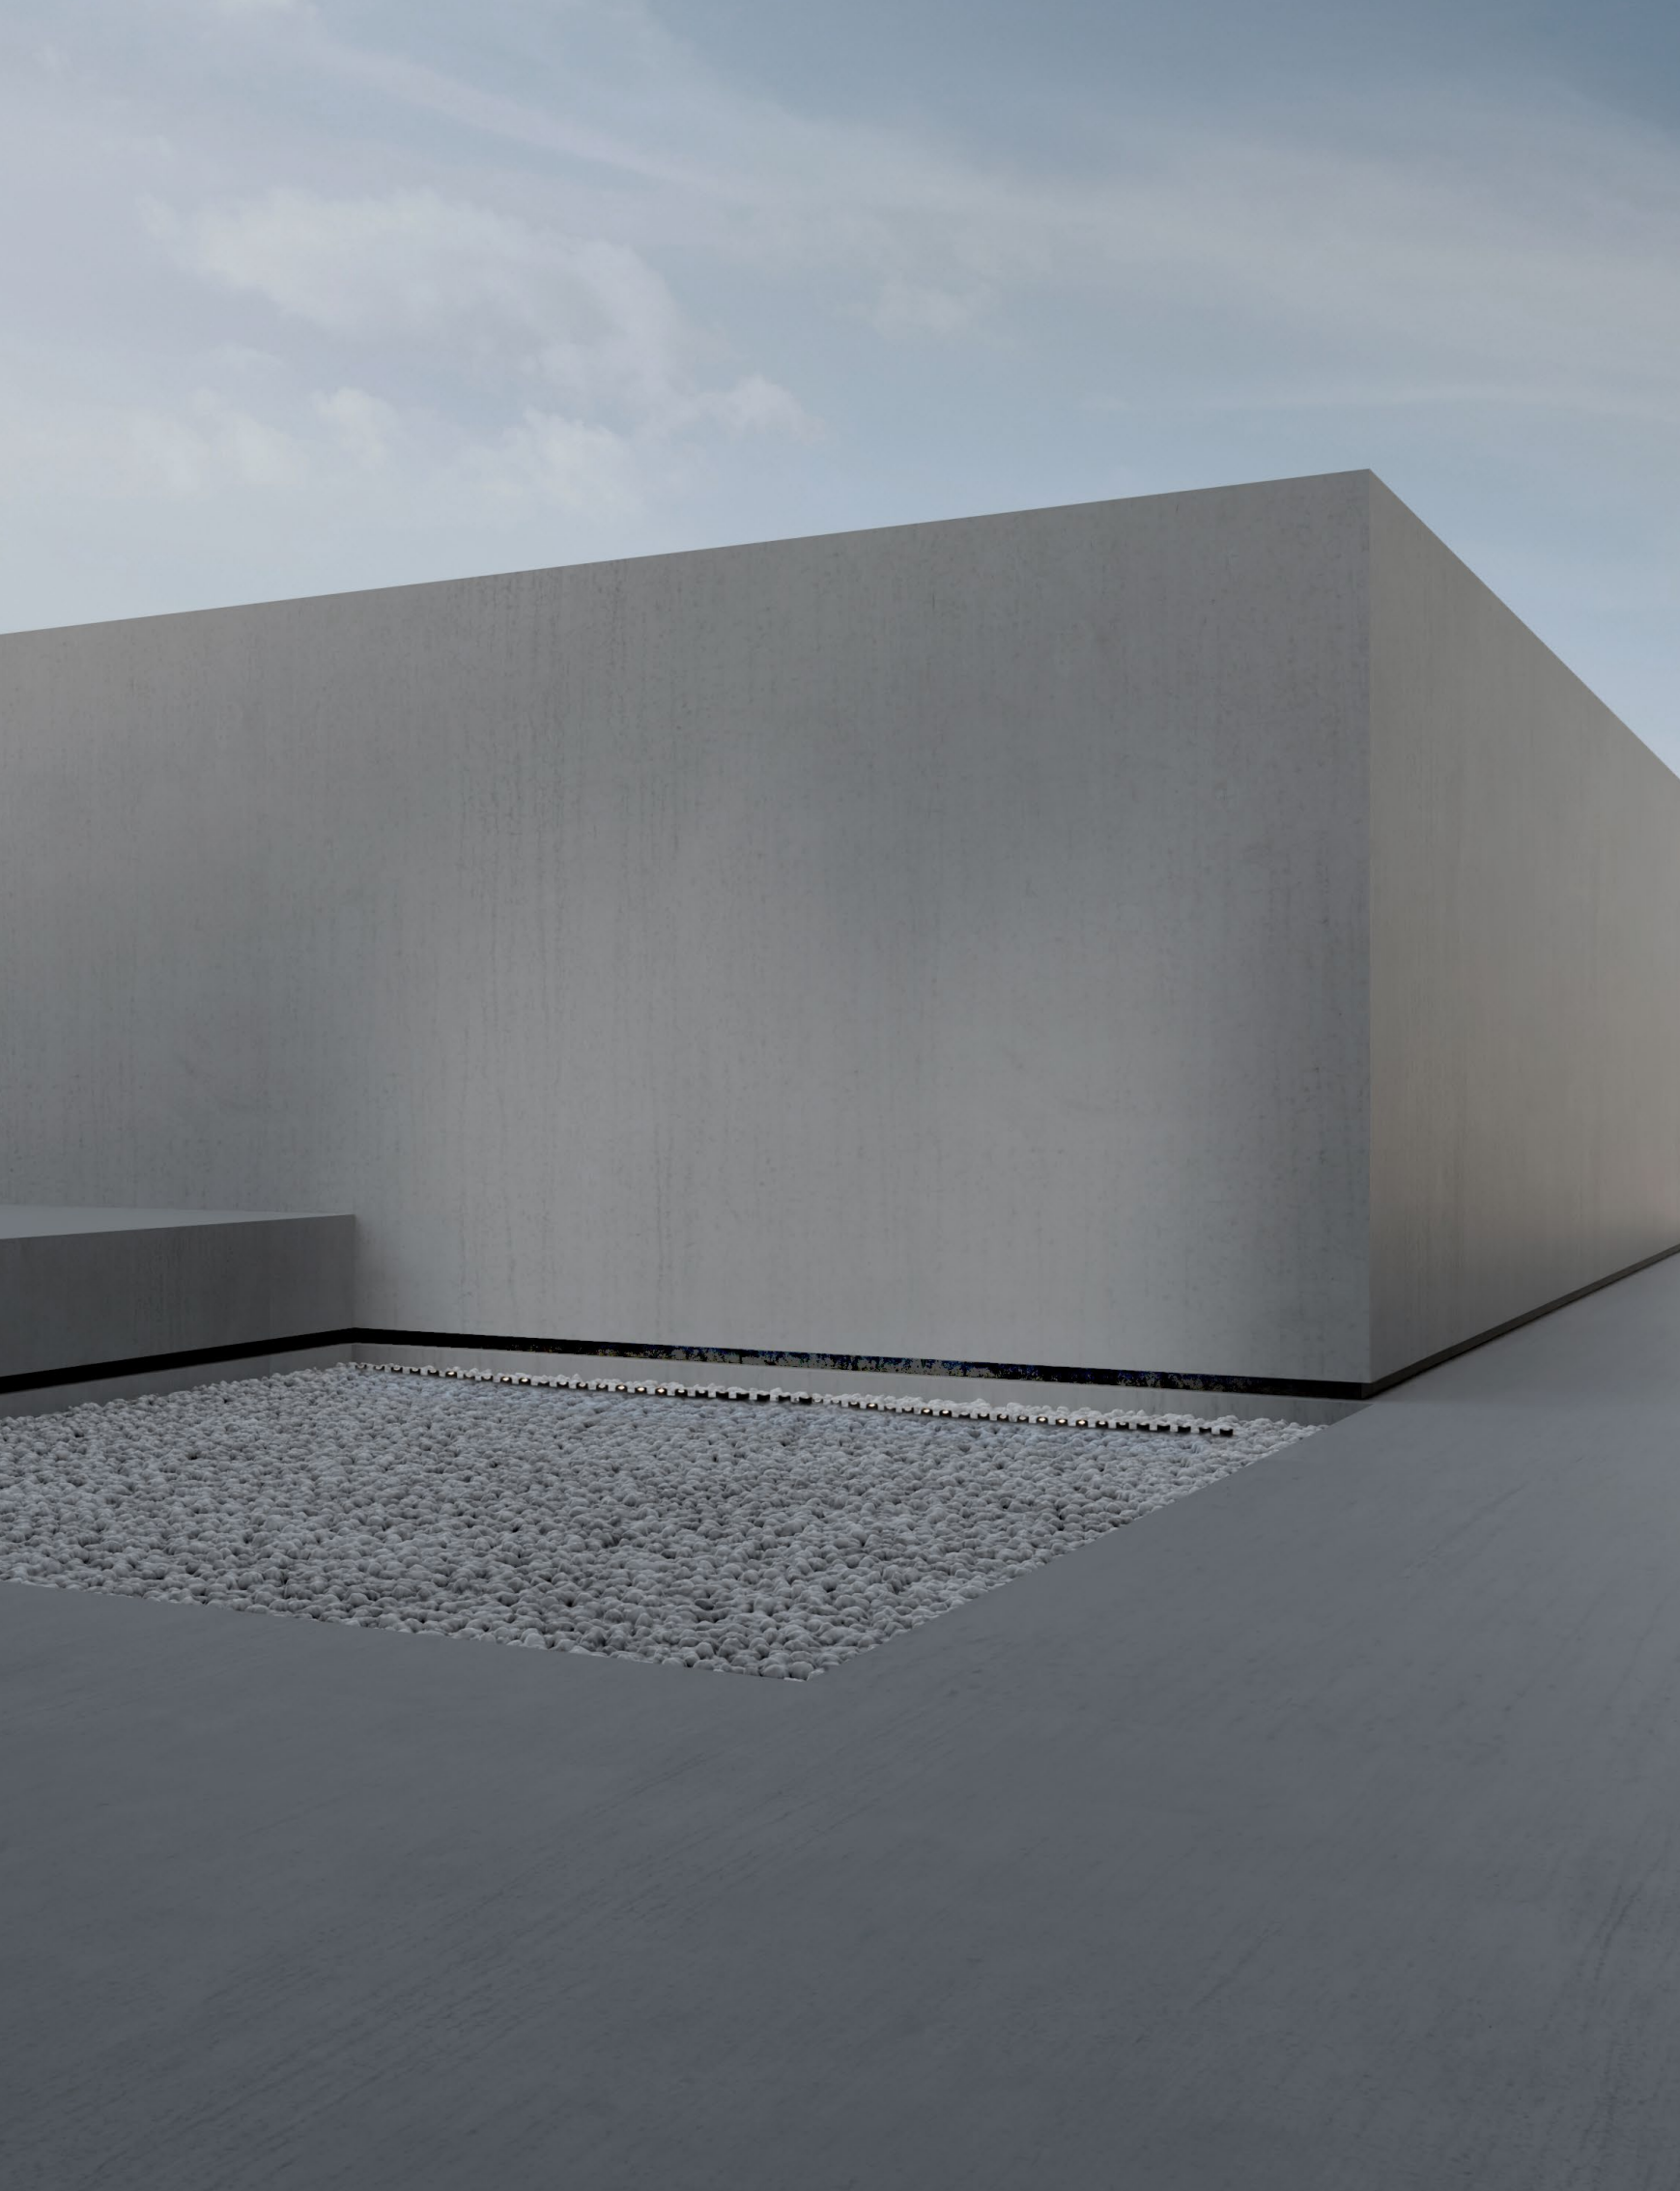

SILICON WALLWASHERS



-
1. Silicon
 2. IP67 protection
 3. High efficiency
 4. Variety of beam angles

Bine

ESSENTIAL

BASIC PARAMETERS

TYPE OF CHIP	COB
POWER	25 W/m
VOLTAGE	24Vdc
LEDS/M	24
LEDS DISTANCE	-
CUTTING UNIT	41.6mm
CRI (Ra)	94
BEAM ANGLE	30°
DIMMING TYPE	TRIAC / Dali 2
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	24mm
HEIGHT	18mm

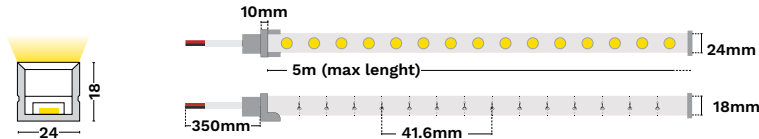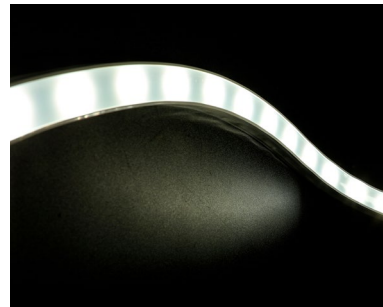

ACCESSORIES				
Aluminum profile 1m	Stainless steel bendable profile 0.5m	Aluminum clips	Tail cap	End Cap
				
9540077	9540078	9540079	9540080	9540081


Diamond

PRO

BASIC PARAMETERS

PHOTOMETRIC PARAMETERS					
POWER	IP	CODE	CCT	LUMEN/M	LUMEN/W
40W	IP67	9540084	3000K	3314	83
		9540085	4000K	3326	83
80W	IP67	9540082	3000K	6628	83
		9540083	4000K	6653	83

TYPE OF CHIP	SMD
POWER	40W / 80W
VOLTAGE	24Vdc
LEDS/M	20
LEDS DISTANCE	-
CUTTING UNIT	50mm
CRI (Ra)	83
BEAM ANGLE	20°
DIMMING TYPE	TRIAC / Dali 2
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	7.2m
LENGHT/REEL	1.2m / 2.4mm
WIDTH	22mm
HEIGHT	29.8mm

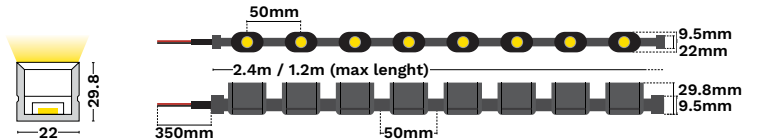

ACCESSORIES		
Aluminum clips	Mounting KIT	Stainless steel bendable profile 1.2m
		
9540086	9540087	9680305

*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices.

SURFACE



13x7 surface
9254100



Thickness: 1.3mm
included:

- 2m aluminum profile
- 2m milky PC cover
- 4pcs end caps
- 4pcs clips



15x10 surface
9254101



Thickness: 0.9-1.0mm
included:

- 2m aluminum profile
- 2m milky PC cover
- 4pcs end caps
- 4pcs clips



17x7 surface
9254103



Thickness: 0.9-1.0mm
included:

- 2m aluminum profile
- 2m milky PC cover
- 4pcs end caps
- 4pcs clips



23x10 surface
9254106



Thickness: 0.9-1.0mm
included:

- 2m aluminum profile
- 2m milky PC cover
- 4pcs end caps
- 4pcs clips

CORNER SURFACE



16x16 corner surface
9254105



Thickness: 0.9-1.0mm
included:

- 2m aluminum profile
- 2m milky PC cover
- 4pcs end caps
- 4pcs clips

RECESSED



15x10 recessed
9254102



Thickness: 0.9-1.0mm
included:

- 2m aluminum profile
- 2m milky PC cover
- 4pcs end caps
- 4pcs clips



17x7 recessed
9254104



Thickness: 0.9-1.0mm
included:

- 2m aluminum profile
- 2m milky PC cover
- 4pcs end caps
- 4pcs clips




23x10 recessed
9254107



Thickness: 0.9-1.0mm
included:

- 2m aluminum profile
- 2m milky PC cover
- 4pcs end caps
- 4pcs clips

TRIMLESS

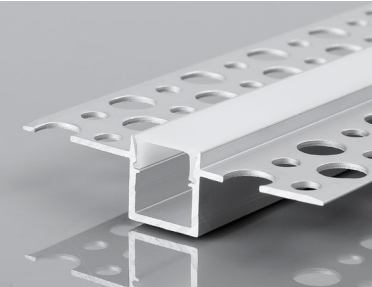


55x13 trimless
9254108



Thickness: 1.1-1.2mm
included:

- 2m aluminum profile
- 2m milky PC cover
- 4pcs end caps
- No clips

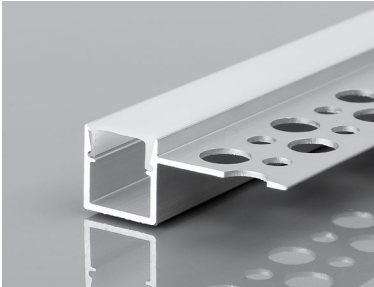


35x13 trimless
9254109



Thickness: 1.1-1.2mm
included:

- 2m aluminum profile
- 2m milky PC cover
- 4pcs end caps
- No clips

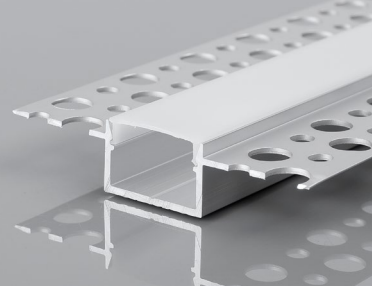


60x13 trimless
9254110



Thickness: 1.2mm
included:

- 2m aluminum profile
- 2m milky PC cover
- 4pcs end caps
- No clips

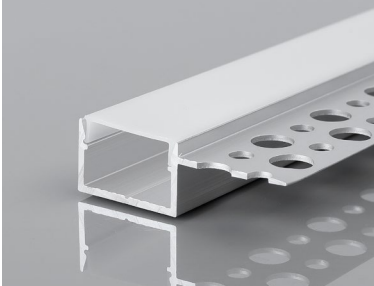

40x13 trimless
9254111



Thickness: 1.2mm
included:

- 2m aluminum profile
- 2m milky PC cover
- 4pcs end caps
- No clips

COMPATIBILITY

	SURFACE				CORNER	RECESSED			TRIMLESS			
	13x7	15x10	17x7	23x10	16x16	15x10	17x7	23x10	55x13	35x13	60x13	40x13
SOLID IP67		●	●	●	●	●	●	●	●	●	●	●
ONE IP65		●	●	●	●	●	●	●	●	●	●	●
VIDA IP20	●	●	●	●	●	●	●	●	●	●	●	●
VIDA IP65		●	●	●		●	●	●			●	●
VIDA IP68		●	●	●		●	●	●			●	●
GORO IP20	●	●	●	●	●	●	●	●	●	●	●	●
VIDA SLIM IP20	●	●	●	●	●	●	●	●	●	●	●	●
VIDA SLIM IP65	●	●	●	●	●	●	●	●	●	●	●	●
HONOR SLIM IP20	●	●	●	●	●	●	●	●	●	●	●	●
HONOR SLIM IP62	●	●	●	●	●	●	●	●	●	●	●	●
HONOR IP20	●	●	●	●	●	●	●	●	●	●	●	●
HONOR IP62	●	●	●	●	●	●	●	●	●	●	●	●
AKTIS IP20	●	●	●	●	●	●	●	●	●	●	●	●
HONOR PLUS IP20	●	●	●	●	●	●	●	●	●	●	●	●
HONOR SLIM PLUS IP20	●	●	●	●	●	●	●	●	●	●	●	●
AKTIS PLUS IP20	●	●	●	●	●	●	●	●	●	●	●	●
COMO HE IP20	●	●	●	●	●	●	●	●	●	●	●	●
PERFORMANCE HE IP20	●	●	●	●	●	●	●	●	●	●	●	●
FREE HE IP20	●	●	●	●	●	●	●	●	●	●	●	●
HONOR HIGH VOLTAGE IP65			●	●			●	●			●	●
VIDA HIGH VOLTAGE IP65			●	●			●	●			●	●
D2W IP20	●	●	●	●	●	●	●	●	●	●	●	●
TW IP20		●	●	●		●	●	●			●	●

LED DRIVERS

IP20

BASIC PARAMETERS

INPUT VOLTAGE	180-264Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,99
OUTPUT VOLTAGE	24Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	100.000h
WARRANTY	5 years

BASIC PARAMETERS

INPUT VOLTAGE	200-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,99
OUTPUT VOLTAGE	24Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	100.000h
WARRANTY	5 years

BASIC PARAMETERS

INPUT VOLTAGE	180-264Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,98
OUTPUT VOLTAGE	24Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	Dali 2/ Push / 1-10V
NOMINAL LIFETIME	100.000h
WARRANTY	5 years
AUXILIARY	DC12V

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9840110	30W	1.25A	12.9x5x1.35	86%
9840100	60W	2.5A	16x5.75x1.8	87%
9840101	100W	4.2A	18.5x6.35x2.2	92%



MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9840111	150W	6.25A	28.9x4.8x3	93%
9840112	200W	8.3A	32.9x4.8x3	93%



MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9840102	80W	3.4A	24.15x4.8x3	91%
9840103	150W	6.25A	28.15x4.8x3	92%
9840104	200W	8.3A	32.15x4.8x3	93%



48Vdc Ledstrips

MODEL	OUTPUT POWER	OUTPUT CURRENT	OUTPUT VOLTAGE	DIMENSIONS (cm)
9621501	100W	2.3A	48Vdc	12.9x9.7x3
9621503	200W	4.4A	48Vdc	21.5x11.5x3



RGBW/DMX DRIVER

MODEL	OUTPUT POWER	OUTPUT CURRENT	OUTPUT VOLTAGE	DIMENSIONS (cm)	DIMMING
9844147	150W	6.25A	24Vdc	35.2x4.3x3	DMX512/ RDM/ DALI 2/ PUSH

LED DRIVERS

IP67

BASIC PARAMETERS

INPUT VOLTAGE	200-277Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,96
OUTPUT VOLTAGE	24Vdc
PST	<1
SVM	<0,4
IP	67
DIMMABLE	On/Off
NOMINAL LIFETIME	70.000h
WARRANTY	5 years

BASIC PARAMETERS

INPUT VOLTAGE	108-305Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,99
OUTPUT VOLTAGE	24Vdc
PST	<1
SVM	<0,4
IP	67
DIMMABLE	Dali 2/ Push
NOMINAL LIFETIME	100.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9840106	75W	3.13A	13.8x6.3x3.2	88%
9840107	100W	4.17A	15.3x6.3x3.2	89%
9840108	150W	6.25A	18.6x6.3x3.2	90%
9840109	200W	8.33A	19.9x6.3x3.7	93%
9840113	250W	10.4A	19.9x6.3x2.7	93%
9840114	320W	13.3A	23x6.8x3.7	94%
9840115	400W	16.67A	24.4x8.3x4	94%



MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9840105	150W	6.25A	21.4x6.8x3.8	93%



48Vdc Ledstrips

MODEL	OUTPUT POWER	OUTPUT CURRENT	OUTPUT VOLTAGE	DIMENSIONS (cm)
9621505	100W	1.1A	48Vdc	18x6.3x.55
9621507	200W	2.4A	48Vdc	24.4x7.1x3.75



*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices.



RF REMOTE CONTROLLERS

Remote controllers must be used in combination with controllers 9080103 and 9080104 for proper operation.

MODEL	CONTROL	W. MODE	OUTPUT VOLTAGE	LINE OF SIGHT	DIMENSIONS
9080101	DIM (4 Zones)	RF 2.4Hz	3Vdc	30m	5.8x10.4x0.9
9080102	RGBW (4 Zones)	RF 2.4Hz	3Vdc	30m	5.8x10.4x0.9



CONTROLLERS

MODEL	CONTROL MODE	W. MODE	OUTPUT VOLTAGE	POWER	DIMENSIONS
9080103	DIM	RF 2.4GHz	2-4Vdc	240W	9.1x3.7x2.1
9080104	DIM/ CCT/ RGB/ RGBW	RF 2.4GHz	2-4Vdc	288W	9.1x3.7x2.1



CASAMBI CONTROLLERS

MODEL	CONTROL MODE	W. MODE	INPUT VOLTAGE	POWER	CHANNELS	DIMENSIONS
9621580	PWM	Bluetooth	12-24Vdc	240W	5	10x4.7x2.25
9621581	PWM	Bluetooth	12-24Vdc	144W	4	7.3x3x1.8



CASAMBI TOUCH DIMMER

MODEL	W. MODE	DESCRIPTION	DIMENSIONS
9621585	Bluetooth	Casambi Controller Touch dimmer with light control, mahogany, black switch	7.3 x 6.2



DMX CONTROLLERS


Controller 9090100 must be used as the primary unit and operated in conjunction with controller 9090101 to ensure proper system functionality.

MODEL	CONTROL MODE	INPUT VOLTAGE	OUTPUT VOLTAGE	CONTROL	APPLICATION	DIMENSIONS
9090100	DMX512/SPI	100-240Vac	5Vdc	Main control	Addressable strips	28.5x15.6x4.4
9090101	DMX512	100-240Vac	5Vdc	DMX512 sub-control	DMX512	25.3x13.7x4.5


Connectors



CODE	TYPE	MAX I	IP	LED TYPE	DIMENSIONS
9680315	Board to Board (8 in 1 type)	5A	IP20	-	8mm PCB
9680316	Board to Board (8 in 1 type)	5A	IP20	-	10mm PCB



CODE	TYPE	MAX I	IP	LED TYPE	DIMENSIONS
9680323	PCB to PCB Linear	5A	IP20	SMD/COB	8mm
9680325	PCB to PCB Linear (with wire)	5A	IP20	SMD/COB	8mm
9680327	PCB to PCB Linear	5A	IP20	SMD/COB	10mm
9680329	PCB to PCB Linear	6A	IP20	SMD/COB	10mm
9680321	PCB to PCB Linear	6A	IP65/67/68	SMD/COB	10mm




CODE	TYPE	MAX I	IP	LED TYPE	DIMENSIONS
9680326	L Corner	5A	IP20	SMD/COB	8mm
9680330	L Corner	5A	IP20	SMD/COB	10mm
9680319	L Corner	-	IP65/67/68	SMD/COB	8mm
9680320	L Corner	-	IP65/67/68	SMD/COB	10mm



CODE	TYPE	MAX I	IP	LED TYPE	DIMENSIONS
9680324	PCB Input	5A	IP20	SMD/COB	8mm
9680328	PCB Input	5A	IP20	SMD/COB	10mm
9680322	PCB Input	6A	IP65/67/68	SMD/COB	10mm



CODE	TYPE	MAX I	IP	LED TYPE	DIMENSIONS
9680317	End Cap	-	IP65/67/68	SMD/COB	8mm
9680318	End Cap	-	IP65/67/68	SMD/COB	10mm



light
the essence
of life



www.novaluce.com