


NOVA LUCE

Leaflet - LED Strips & Silicon NEON
2025




LED STRIPS & NEON FLEX 07-----15

Pages

Our extensive range of Led Strips and NEON Flex is designed to meet diverse lighting needs with unmatched performance, versatility, and durability. Manufactured with high-quality materials and advanced technology, these products ensure consistent illumination with SDCM<3, guaranteeing uniform color and brightness across all applications. Whether enhancing indoor spaces, highlighting outdoor architectural features, or serving specialized purposes, our Led Strips and NEON Flex meet the highest photometric standards. Featuring waterproof protection, flexible designs, and compatibility with advanced control systems such as SPI and DMX, they are ideal for creative and functional projects. From subtle accents to bold lighting statements, our broad range of products ensures seamless integration and exceptional reliability in any environment.

| | |
|-------------|------------|
| CHEAT SHEET | Page 8-11 |
| NEON FLEX | Page 12-23 |
| UNDERWATER | Page 26-31 |
| LED STRIPS | Page 32-53 |
| WALLWASHERS | Page 54-57 |
| PROFILES | Page 58-60 |
| LED DRIVERS | Page 60-62 |

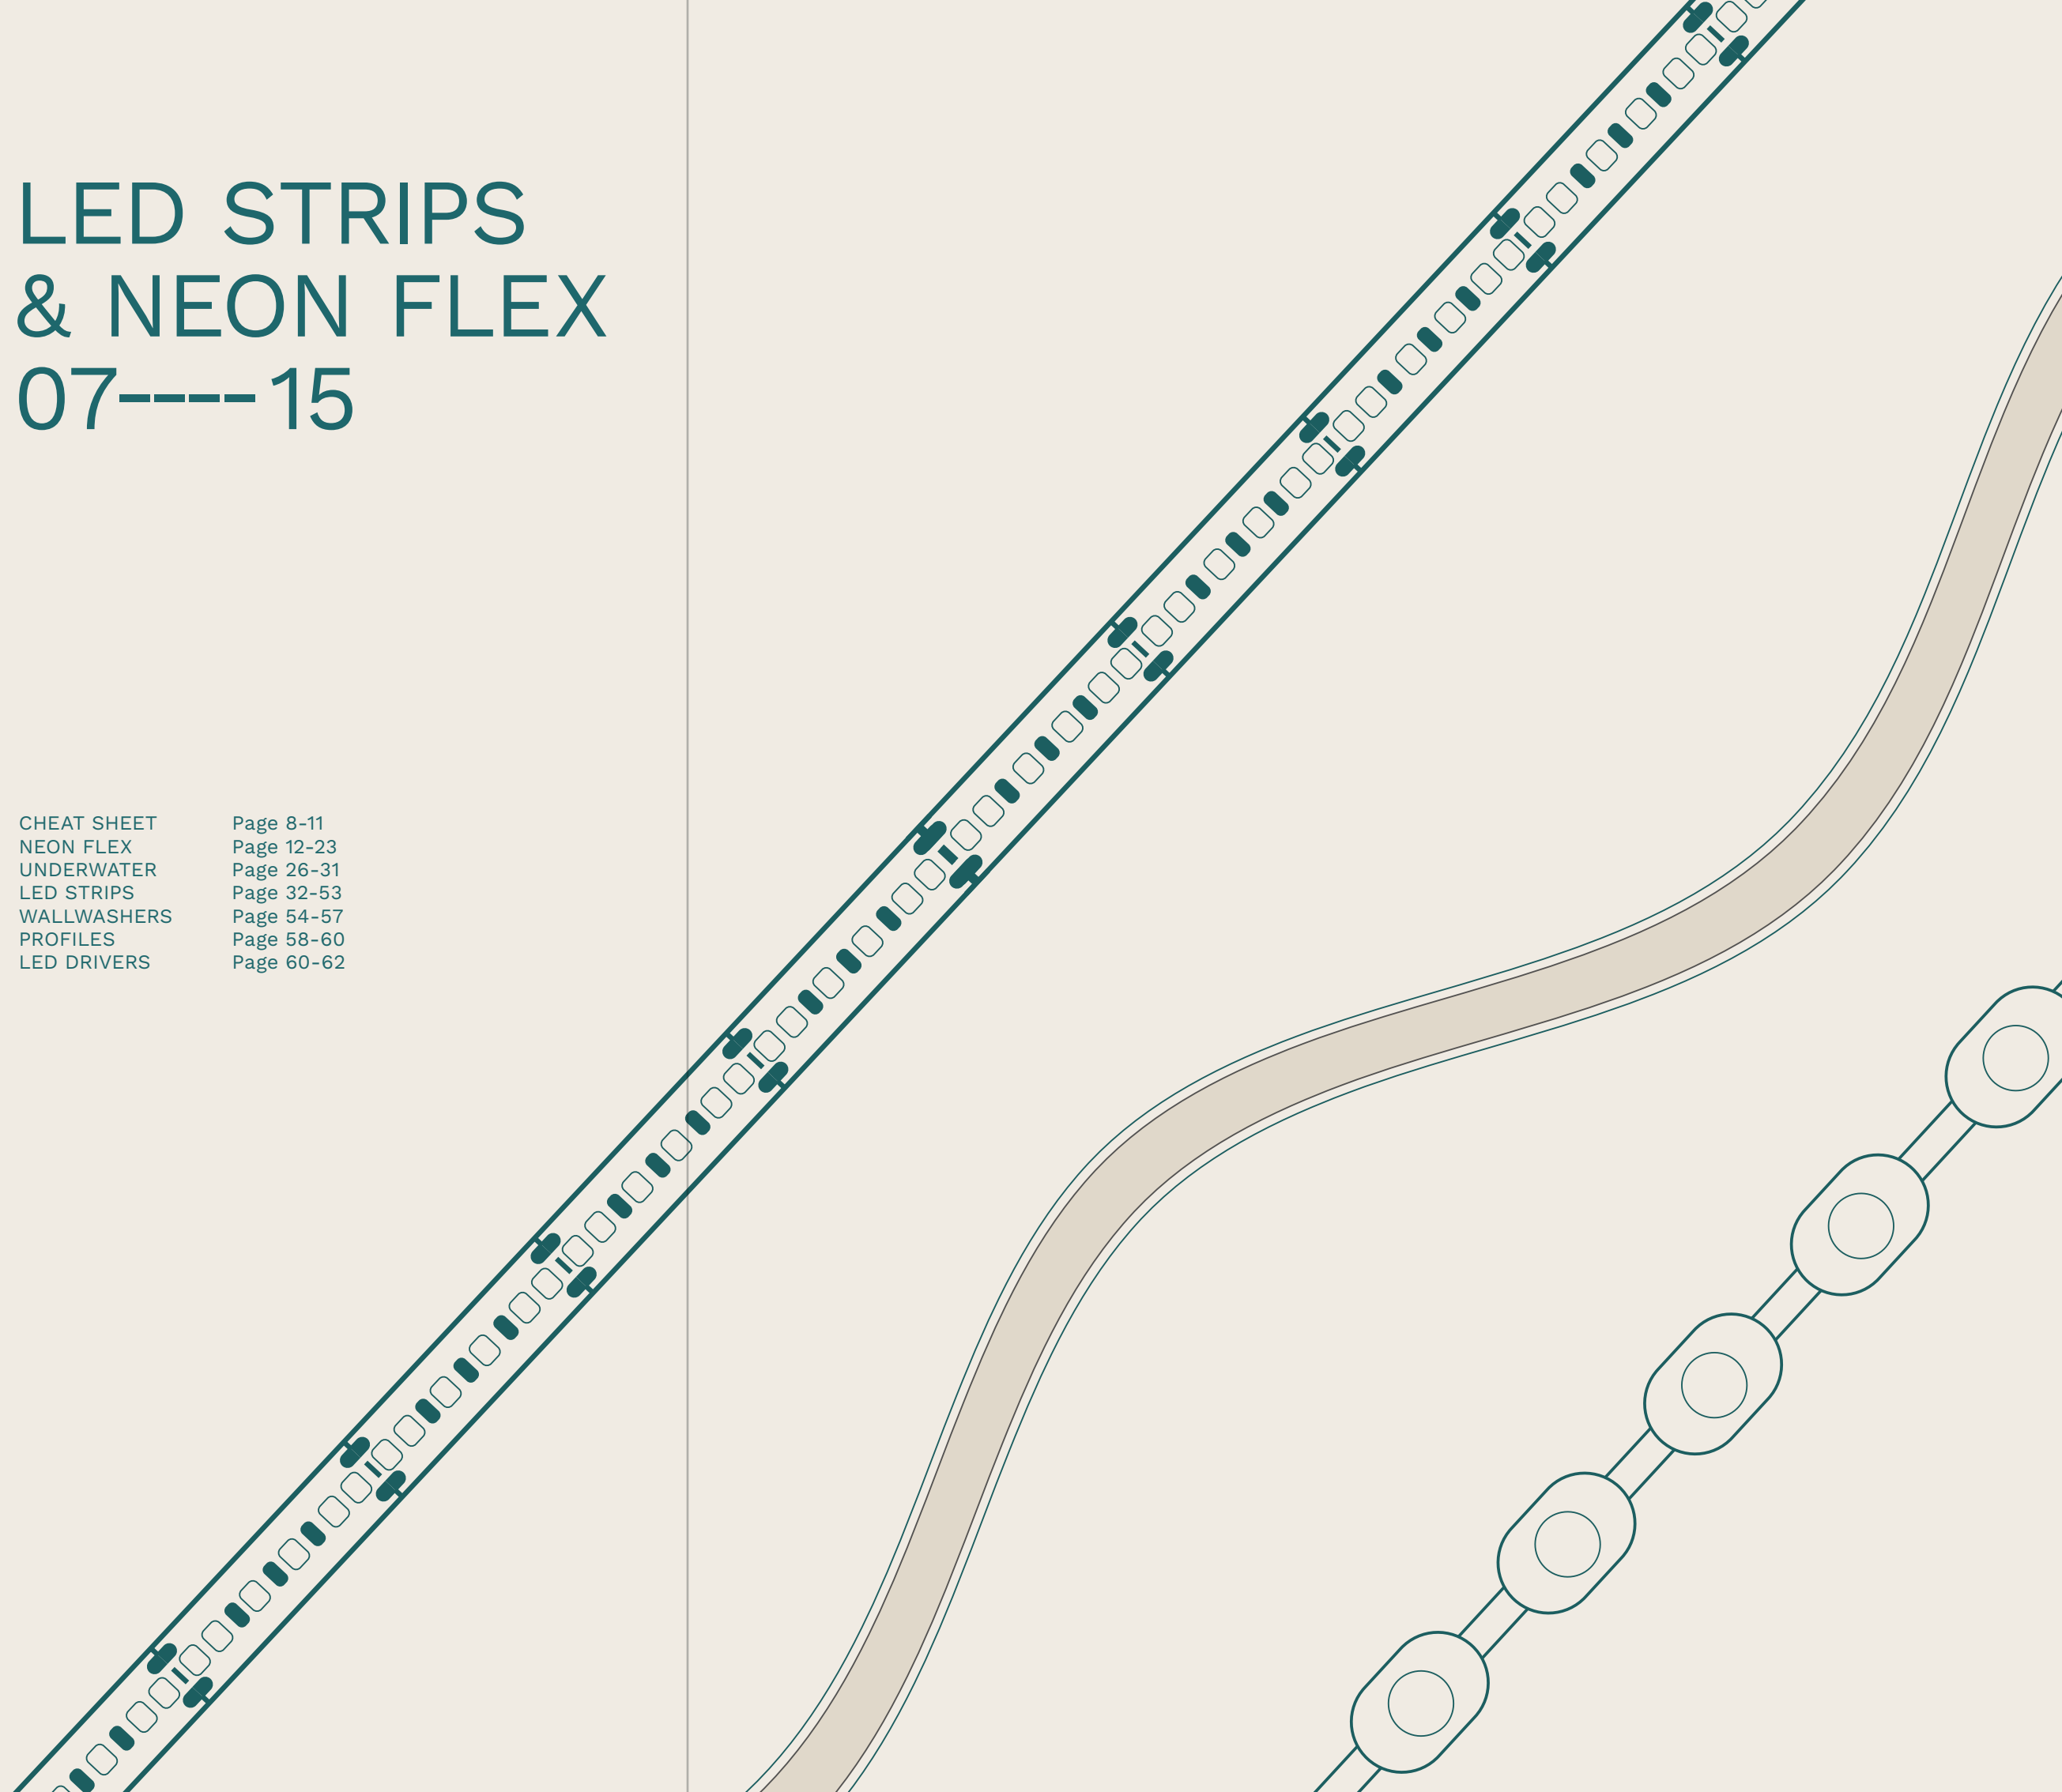

Product Categories & Series

Three Different product categories Architecture Neon FLEX, LED Strip & Silicone Wallwashers

Our product range contains two series of products, The “ESSENTIAL” series and the “PRO” Series.

Architecture Neon Flex

The Architecture Neon Series comprises high-reliability neon flex lighting designed for versatile use in indoor, outdoor, and underwater environments. This series includes Facade Light and Under Water options. Facade Light is offered in various sizes, light colors, and SPI/DMX control options, providing a versatile solution for applications demanding exceptional photoelectric performance. Under Water is distinguished by its IK10 and IP68 protection ratings, ensuring durability and reliability for underwater lighting installations.




Led Strips

Led Strips, designed to meet diverse lighting needs with exceptional performance and reliability. Built to withstand various conditions, including waterproof options, they deliver high photometrical standards for precise and vibrant illumination. Ideal for both functional and decorative applications, our Led Strips combine durability and efficiency, ensuring they excel in any environment.



Silicon Wallwashers

wallwashers offer a versatile and durable solution for illuminating walls with smooth, even light distribution. Designed with advanced materials, they provide excellent resistance to environmental factors, ensuring long-lasting performance. Perfect for both indoor and outdoor applications, these wallwashers deliver high photometric accuracy, creating dynamic lighting effects for architectural and decorative projects.

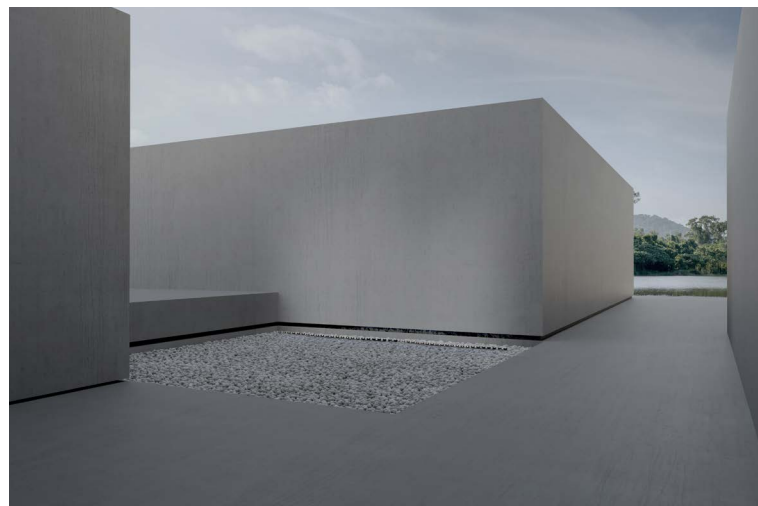

Essential

The Essential series is a versatile and affordable lighting solution designed for everyday use. These Led Strips provide a balance of efficiency and functionality, making them ideal for both residential and commercial applications. Featuring a flexible and easy-to-install design, they can be customized to fit a variety of spaces, including under cabinets, shelves, or around decorative elements. With energy-efficient LEDs, the Basic series offers reliable illumination while reducing power consumption. Available in a range of color temperatures and brightness levels, these strips provide a simple yet effective way to enhance ambiance and visibility in any setting




Pro

The PRO series is a premium lighting solution engineered for superior performance and precision. Designed with energy efficiency in mind, these products deliver high luminous output while consuming minimal power, making them both cost-effective and environmentally friendly. Boasting a stringent SDCM (Standard Deviation of Color Matching) of less than 3, the PRO series ensures exceptional color consistency across all installations, providing uniform lighting that meets professional standards. With high brightness levels, these strips are perfect for demanding applications, such as retail displays, architectural accents, and task lighting. Durable and versatile, the PRO series combines advanced technology with unmatched reliability, making it the top choice for professionals seeking premium quality lighting.










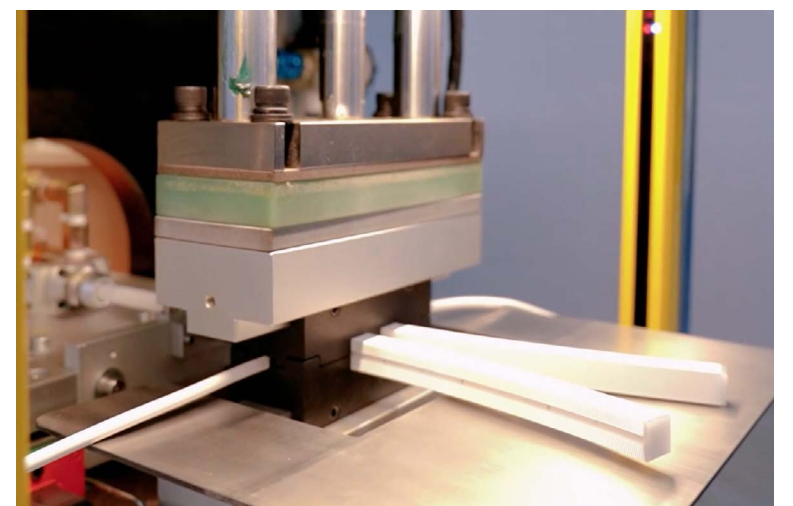




























Customizable IP68 NEON FLEX

We are excited to announce that our NEON 1617 IP68 product is now fully customizable in size, with a maximum length of 14 meters, thanks to our state-of-the-art molding injection machine. This advancement enables us to meet diverse customer needs with precision and flexibility, providing tailored solutions without compromising the product's renowned durability and water resistance. Whether you require shorter sections for compact installations or longer lengths for extensive projects, our enhanced manufacturing capabilities ensure consistent quality and reliability across all custom sizes. Additionally, with the superior quality of materials used and the precision of our molding process, we guarantee that all our products maintain exceptional chlorine, alkaline, and UV resistance, ensuring long-lasting performance in even the harshest environments.



| PAGE | MODEL | DC(V) | MAX. W/M | LM/W | LM/M (MAX) | CRI | CCT | LEDS/M | BENDING | UNIT CUT | FPS WIDTH | LENGHT | IP PROCESS | WARANTY |
|-------------------------------|------------|-------|----------|------|------------|-----|------------------------------|--------|------------|----------|-----------|--------|------------|---------|
| Architercture Neon | | | | | | | | | | | | | | |
| 14 | Gomu 16x17 | 24 | 10 | 68 | 680 | 94 | 2700K 3000K 4000K | 120 | 3D | 50mm | 16mm | 10m | IP67 | 5 YEARS |
| 16 | Kema 16x16 | 24 | 16 | 71 | 1120 | 96 | 2700K 3000K RGBW 3000K | 140 | Top | 67mm | 16mm | 20m | IP67 | 5 YEARS |
| 17 | Gomu 16x15 | 24 | 15 | 78 | 780 | 94 | 2700K 3000K 4000K RGBW 4000K | 120 | Top | 125mm | 16mm | 17m | IP67 IP44 | 5 YEARS |
| 18 | Kema 10x18 | 24 | 14 | 34 | 494 | 96 | 3000K RGB RGBW 3000K | 140 | Side | 100mm | 10mm | 5mm | IP67 | 5 YEARS |
| 19 | Gomu 12x20 | 24 | 15 | 56 | 560 | 95 | 2700K 3000K 4000K RGBW 4000K | 120 | Side | 50mm | 12mm | 17m | IP67 IP44 | 5 YEARS |
| 20 | Gomu 10x10 | 24 | 10 | 77 | 765 | 94 | 2700K 3000K 4000K | 168 | Top | 35.7mm | 10mm | 5m | IP67 | 5 YEARS |
| 21 | Kema 8x8 | 24 | 6 | 68 | 410 | 94 | 2700K 3000K 4000K | 120 | 3D | 29.4mm | 8mm | 10m | IP67 | 5 YEARS |
| 22 | Kema 6x6 | 24 | 8 | 95 | 756 | 92 | 2700K 3000K 4000K | 240 | Top | 29.4mm | 6mm | 6m | IP67 | 5 YEARS |
| 22 | Kema 4x10 | 24 | 10 | 49 | 490 | 95 | 2700K 3000K 4000K | 182 | Top | 38.5mm | 4mm | 10m | IP67 | 5 YEARS |
| 23 | Kema R18 | 24 | 12 | 64 | 766 | 97 | 3000K | 360 | 3D | free | R18 | 5m | IP67 | 5 YEARS |
| 23 | Kema R23 | 24 | 14 | 68 | 955 | 96 | 3000K | 280 | 3D | free | R23 | 5m | IP65 | 5 YEARS |
| Architercture Neon Undrewater | | | | | | | | | | | | | | |
| 26 | Gomu 16x17 | 24 | 10 | 64 | 639 | 94 | 3000K | 120 | Top / Side | 50mm | 16mm | 14m | IP68 | 5 YEARS |
| 28 | Kema 16x16 | 24 | 14 | 63 | 875 | 92 | 3000K 4000K | 120 | Top | 50m | 16mm | 6m | IP67 | 5 YEARS |
| 28 | Kema 20x18 | 24 | 16 | 32 | 507 | 54 | RGBW 3000K | 70 | Top | 100mm | 20mm | 5m | IP68 | 5 YEARS |
| 29 | Gomu 16x15 | 24 | 10 | 51 | 530 | 94 | 3000K | 144 | Top | 50mm | 16mm | 5m | IP68 | 5 YEARS |
| 30 | Kema 10x18 | 24 | 14 | 42 | 590 | 95 | 3000K 4000K | 120 | Side | 50mm | 10mm | 6m | IP68 | 5 YEARS |
| 30 | Kema 12x20 | 24 | 16 | 33 | 532 | 94 | RGBW 3000K | 70 | Side | 50mm | 12mm | 5m | IP68 | 5 YEARS |
| 31 | Gomu 12x20 | 24 | 10 | 37 | 389 | 94 | 3000K | 144 | Side | 41.67m | 12mm | 5m | IP68 | 5 YEARS |

| PAGE | MODEL | DC(V) | MAX. W/M | LM/W | LM/M (MAX) | CRI | CCT | LEDS/M | UNIT CUT | FPS WIDTH | LENGHT | DIAGRAM (TYPE) | IP PROCESS | WARANTY |
|---------------------------------|------------|---------|----------|------|------------|-----|-------------------|--------|----------|-----------|-----------|---|---|---------|
| Led Strips - SILICON SMD | | | | | | | | | | | | | | |
| 34 | Solid | 24 | 10 | 108 | 1295 | 92 | 2700K 3000K 4000K | 288 | 27.77mm | 10mm | 5m |  |  | 5 YEARS |
| 35 | One | 24 | 10 | 85 | 850 | 94 | 2700K 3000K 4000K | 280 | 50mm | 10mm | 5m |  |  | 5 YEARS |
| Led Strips - COB | | | | | | | | | | | | | | |
| 36 | Vida | 24 | 12 | 114 | 1368 | 91 | 2700K 3000K 4000K | 480 | 50mm | 12mm | 5m |  |  | 5 YEARS |
| 37 | Goro | 24 | 10 | 132 | 1320 | 92 | 2700K 3000K 4000K | 480 | 50mm | 10mm | 5m |  |  | 5 YEARS |
| 38 | Vida Slim | 24 | 10 | 102 | 931 | 91 | 2700K 3000K 4000K | 320 | 50mm | 8mm | 5m |  |  | 5 YEARS |
| 39 | Honor Slim | 24 | 9.6 | 102 | 980 | 93 | 2700K 3000K 4000K | 120 | 50mm | 8mm | 5m |  |  | 5 YEARS |
| Led Strips - SMD | | | | | | | | | | | | | | |
| 40 | Honor | 24 | 8 | 102 | 1470 | 93 | 2700K 3000K 4000K | 180 | 33.33mm | 10mm | 5m |  |  | 5 YEARS |
| 41 | Aktis | 24 | 14.4 | 84 | 1216 | 93 | 3000K 4000K | 120 | 50mm | 8mm | 5m |  |  | 5 YEARS |
| 42 | Honor Plus | 24 | 19.2 | 102 | 1960 | 93 | 2700K 3000K 4000K | 240 | 33mm | 10mm | 5m |  |  | 5 YEARS |
| 44 | Aktis Plus | 24 | 14.4 | 98 | 1795 | 93 | 3000K 4000K | 240 | 25mm | 8mm | 5m |  |  | 5 YEARS |
| 46 | He | 24 | 14 | 186 | 2270 | 92 | 3000K 4000K | 180 | 62.5mm | 10mm | 5m |  |  | 5 YEARS |
| 48 | Free He | 24 | 12 | 95 | 1140 | 90 | 2700K 3000K 4000K | 180 | free | 6mm | 5m |  |  | 5 YEARS |
| 50 | Honor HV | 220-230 | 14 | 92 | 825 | 80 | 2700K 3000K 4000K | 120 | 50mm | 14mm | 50m |  |  | 2 YEARS |
| 51 | Vida HV | 220-230 | 8 | 75 | 600 | 70 | 2700K 3000K 4000K | 288 | 1000mm | 12mm | 50m |  |  | 2 YEARS |
| 52 | D2W | 24 | 10 | 110 | 1100 | 80 | 1900K 3000K | 168 | 50mm | 10mm | 5m |  |  | 5 YEARS |
| 53 | TW | 24 | 19.2 | 53 | 1010 | 70 | 2700K 6000K | 120 | 50mm | 10mm | 5m |  |  | 5 YEARS |
| Silicon Wallwashers | | | | | | | | | | | | | | |
| 56 | Bine | 24 | 10 | 84 | 2108 | 94 | 3000K 4000K | - | 41.6mm | 24mm | 5m |  |  | 5 YEARS |
| 57 | Diamond | 24 | 80 | 83 | 6653 | 83 | 3000K 4000K | - | 50mm | 22mm | 2.4m/1.2m |  |  | 5 YEARS |



ARCHITECTURE
NEON FLEX

FACADE LIGHTING

1. Side / top / 3D bend
2. IP44 / IP65 / IP67 protection
with no dark spot
3. Multiple CCT, DMX
4. Neon profileless
5. Voltage DC24V




UNDER WATER

1. Side / top bend optional
2. IP68 / IK10 protection
3. Multiple CCT, DMX/SPI
4. Voltage DC24V


Gomu 16x17 3D PRO




- IP67 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance



Bottom Cable 30cm

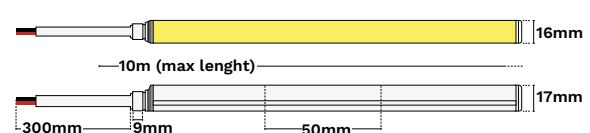

| CODE | CCT | W/M | LM/M | LM/W | SDCM | UNIT CUT | REEL | DIMENISIONS | MAX L (M) |
|---------|-------|-----|------|------|------|----------|------|-------------|-----------|
| 9530026 | 2700K | 10 | 650 | 65 | <3 | 50mm | 10m | 16 x 17mm | 10m |
| 9530028 | 3000K | 10 | 660 | 66 | <3 | 50mm | 10m | 16 x 17mm | 10m |
| 9530029 | 4000K | 10 | 680 | 68 | <3 | 50mm | 10m | 16 x 17mm | 10m |



COMMON ACCESSORIES

Silicone input cap



9540012

Silicone end cap



9540012



Kema 16x16

ESSENTIAL



- IP67 protection level
- UV resistance
- Salt solution resistance



STANDARD VERSION

| CODE | CCT | W/M | LM/M | LM/W | UNIT CUT | REEL | DIMENISIONS | MAX L (M) |
|---------|-------|-----|------|------|----------|------|-------------|-----------|
| 9540144 | 3000K | 16 | 1096 | 69 | 50mm | 5m | 16 x 16mm | 5m |
| 9540145 | 4000K | 16 | 1120 | 71 | 50mm | 5m | 16 x 16mm | 5m |




LONG VERSION

| CODE | CCT | W/M | LM/M | LM/W | UNIT CUT | REEL | DIMENISIONS | MAX L (M) |
|---------|-------|-----|------|------|----------|------|-------------|-----------|
| 9540154 | 3000K | 6 | 365 | 61 | 50mm | 30m | 16 x 16mm | 30m |



- IP67 protection level
- UV resistance
- Salt solution resistance

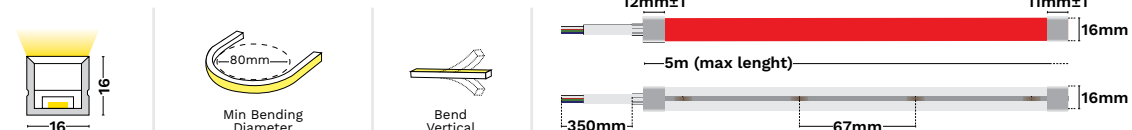

RGBW

| CODE | CCT | W/M | LM/M | LM/W | UNIT CUT | REEL | DIMENISIONS | MAX L (M) |
|---------|------------|-----|------|------|----------|------|-------------|-----------|
| 9540164 | RGBW-3000K | 16 | 727 | 46 | 67mm | 5m | 16 x 16mm | 5m |



COMMON ACCESSORIES


| Input cap (Straight Outlet) | Input cap (Side Outlet) | DIY End cap | Bracket | Aluminium Profile 1m | Aluminium Profile 2m | Aluminium Profile 1m (for intergrated end cap) |
|-----------------------------|-------------------------|-------------|---------|----------------------|----------------------|--|
| 9540146 | 9540147 | 9540148 | 9540149 | 9540151 | 9540152 | 9540153 |

Gomu 16x15

PRO



- IP67 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance

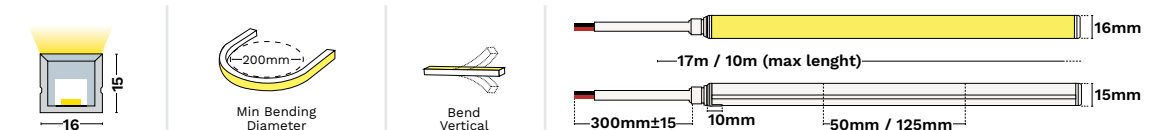

Bottom Cable Entry 300cm

STANDARD

| CODE | CCT | W/M | LM/M | LM/W | SDCM | UNIT CUT | REEL | DIMENISIONS | MAX L (M) |
|---------|------------|-----|------|------|------|----------|------|-------------|--------------------|
| 9530011 | 2700K | 10 | 740 | 74 | <3 | 50mm | 17m | 16 x 15mm | 17m (DIY cap 10m) |
| 9540010 | 3000K | 10 | 765 | 77 | <3 | 50mm | 17m | 16 x 15mm | 17m (DIY cap 10m) |
| 9530012 | 4000K | 10 | 780 | 78 | <3 | 50mm | 17m | 16 x 15mm | 17m (DIY cap 10m) |
| 9540011 | RGBW-4000K | 15 | 440 | 26 | - | 125mm | 10m | 16 x 15mm | 10m (DIY cap 4,8m) |




COMMON ACCESSORIES

| COMMON ACCESSORIES | | | | SINGLE COLOR | | | RGBW | |
|----------------------|---------------------|--------------------|----------------|---------------------|------------------|------------------|---------------------|--|
| Aluminium Profile 1m | Curved Profile 0.5m | Closed Endcap | Mounting Clips | Screwless input cap | Normal input cap | Middle Connector | Screwless input cap | |
| 9540012 | 9540013 | 9530016 9540017 | 9540014 | 9540015 | 9530014 | 9530025 | 9540016 9530015 | |



- IP44 protection level

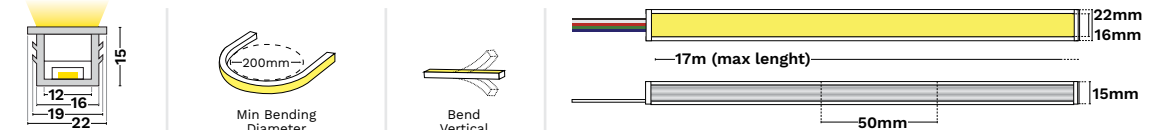

EMBEDDED VERSION - NO PROFILE

| CODE | CCT | W/M | LM/M | LM/W | SDCM | UNIT CUT | REEL | DIMENISIONS | MAX L (M) |
|---------|-------|-----|------|------|------|----------|------|-------------|-----------------|
| 9530045 | 2700K | 10 | 693 | 63 | <3 | 50mm | 17m | 16 x 15 | 17 (DIY cap 10) |
| 9540046 | 3000K | 10 | 660 | 66 | <3 | 50mm | 17m | 16 x 15 | 17 (DIY cap 10) |
| 9530047 | 4000K | 10 | 669 | 67 | <3 | 50mm | 17m | 16 x 15 | 17 (DIY cap 10) |



ACCESSORIES


| Silicone input cap | Silicone end cap |
|--------------------|------------------|
| 9540047 | 9540048 |

Kema 10x18

ESSENTIAL



- IP67 protection level
- UV resistance
- Salt solution resistance

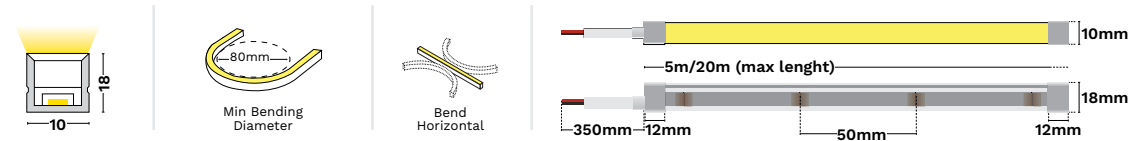


STANDARD VERSION

| CODE | CCT | W/M | LM/M | LM/W | UNIT CUT | REEL | DIMENSIONS | MAX L (M) |
|---------|-------|-----|------|------|----------|------|------------|-----------|
| 9540166 | 3000K | 14 | 494 | 34 | 50mm | 5m | 10 x 18mm | 5m |




LONG VERSION

| CODE | CCT | W/M | LM/M | LM/W | UNIT CUT | REEL | DIMENSIONS | MAX L (M) |
|---------|-------|-----|------|------|----------|------|------------|-----------|
| 9540165 | 3000K | 10 | 344 | 34 | 50mm | 20m | 10 x 18mm | 20m |

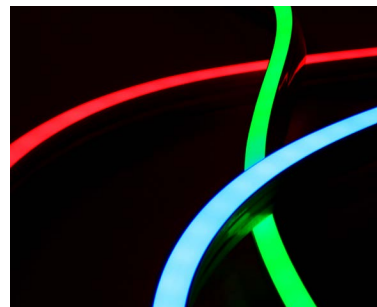

- IP67 protection level
- UV resistance
- Salt solution resistance

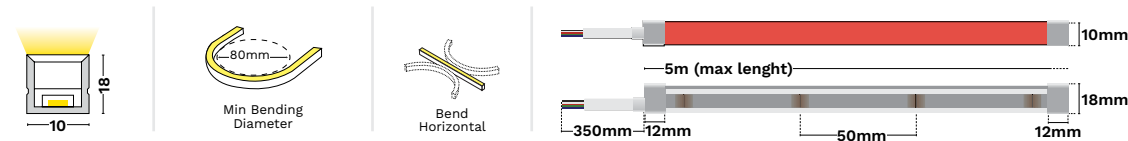

RGB

| CODE | CCT | W/M | LM/M | LM/W | UNIT CUT | REEL | DIMENSIONS | MAX L (M) |
|---------|-----|-----|------|------|----------|------|------------|-----------|
| 9540169 | RGB | 14 | 170 | 12 | 50mm | 5m | 10 x 18mm | 5m |




RGBW


| CODE | CCT | W/M | LM/M | LM/W | UNIT CUT | REEL | DIMENSIONS | MAX L (M) |
|---------|------------|-----|------|------|----------|------|------------|-----------|
| 9540173 | RGBW-3000K | 14 | 270 | 19 | 100mm | 5m | 10 x 18mm | 5m |



COMMON ACCESSORIES

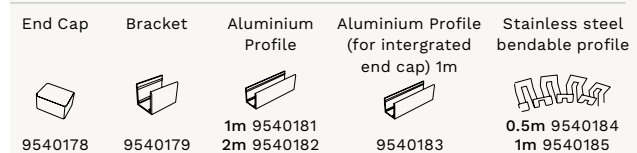

SINGLE COLOR ACCESSORIES

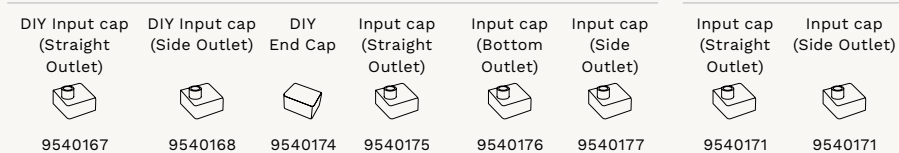


Gomu 12x20

PRO



- IP67 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance

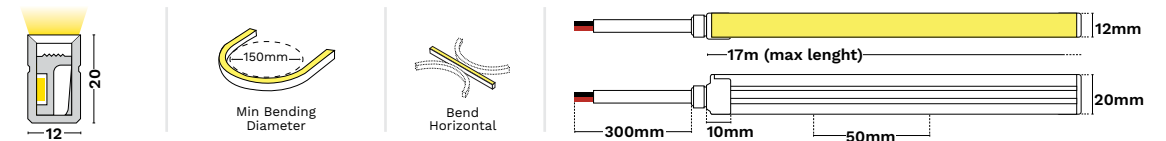


STANDARD

| CODE | CCT | W/M | LM/M | LM/W | SDCM | UNIT CUT | REEL | DIMENSIONS | MAX L (M) |
|---------|-------|-----|------|------|------|----------|------|------------|------------------|
| 9530017 | 2700K | 10 | 520 | 52 | <3 | 50mm | 17m | 12 x 20mm | 12m (DIY cap 10) |
| 9540018 | 3000K | 10 | 535 | 54 | <3 | 50mm | 17m | 12 x 20mm | 12m (DIY cap 10) |
| 9530019 | 3000K | 10 | 560 | 56 | <3 | 50mm | 17m | 12 x 20mm | 12m (DIY cap 10) |



- IP67 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance

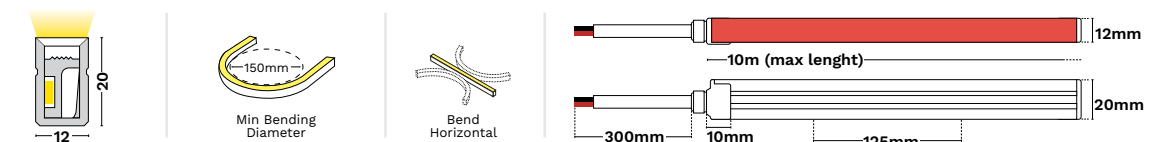


RGBW

| CODE | CCT | W/M | LM/M | LM/W | SDCM | UNIT CUT | REEL | DIMENSIONS | MAX L (M) |
|---------|------------|-----|------|------|------|----------|------|------------|-------------------|
| 9540019 | RGBW-4000K | 15 | 305 | 20 | - | 50mm | 10m | 12 x 20mm | 10m (DIY cap 4.8) |



- IP44 protection level

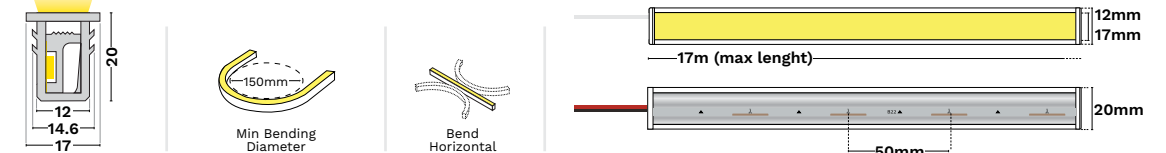


EMBEDDED VERSION - NO PROFILE

| CODE | CCT | W/M | LM/M | LM/W | SDCM | UNIT CUT | REEL | DIMENSIONS | MAX L (M) |
|---------|-------|-----|------|------|------|----------|------|------------|------------------|
| 9530048 | 2700K | 10 | 400 | 40 | <3 | 50mm | 17m | 12 x 20mm | 12m (DIY cap 10) |
| 9540049 | 3000K | 10 | 410 | 41 | <3 | 50mm | 17m | 12 x 20mm | 12m (DIY cap 10) |
| 9530050 | 4000K | 10 | 430 | 43 | <3 | 50mm | 17m | 12 x 20mm | 12m (DIY cap 10) |




COMMON ACCESSORIES

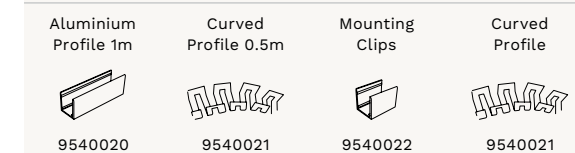

SINGLE COLOR ACCESSORIES



RGBW




Gomu 10x10


PRO



- IP67 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance



Bottom Cable 30cm

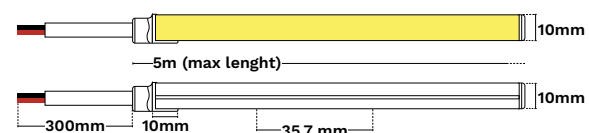

| CODE | CCT | W/M | LM/M | LM/W | SDCM | UNIT CUT | REEL | DIMENISIONS | MAX L (M) |
|---------|-------|-----|------|------|------|----------|------|-------------|-----------|
| 9530051 | 2700K | 10 | 740 | 74 | <3 | 35.7mm | 5m | 10 x 10mm | 5m |
| 9540026 | 3000K | 10 | 750 | 75 | <3 | 35.7mm | 5m | 10 x 10mm | 5m |
| 9530027 | 4000K | 10 | 765 | 77 | <3 | 35.7mm | 5m | 10 x 10mm | 5m |



ACCESSORIES




| Plastic Profile 1m | Mounting Clips | Silicone End Cap | Slicone Closed End Cap | Solder Free End Cap | Assembled Closed End Cap |
|--------------------|----------------|--------------------|------------------------|---------------------|--------------------------|
| | | | | | |
| 9540027 | 9540028 | 9540029 9530040 | 9540030 9530041 | 9530042 | 9530043 |

Kema 8x8 3D

ESSENTIAL



- IP67 protection level
- UV resistance
- Salt solution resistance

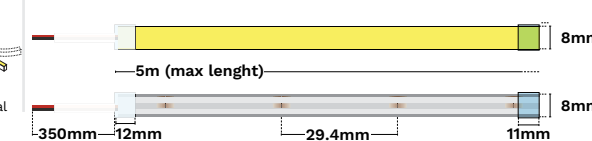

| CODE | CCT | W/M | LM/M | LM/W | UNIT CUT | REEL | DIMENISIONS | MAX L (M) |
|---------|-------|-----|------|------|----------|------|-------------|-----------|
| 9540123 | 2700K | 6 | 385 | 64 | 29.4mm | 5m | 8 x 8mm | 5m |
| 9540124 | 3000K | 6 | 390 | 65 | 29.4mm | 5m | 8 x 8mm | 5m |
| 9540125 | 4000K | 6 | 410 | 68 | 29.4mm | 5m | 8 x 8mm | 5m |



ACCESSORIES


| Aluminium Profile | Mounting Clips | Stainless steel bendable profile | End Cap | Input cap (Straight Outlet) |
|-------------------|----------------|----------------------------------|---------|-----------------------------|
| | | | | |
| 9540126 | 9540127 | 9540128 | 9540129 | 9540131 |

Kema 6x6


ESSENTIAL



- IP67 protection level
- UV resistance
- Acids & alkalis resistance
- Salt solution resistance

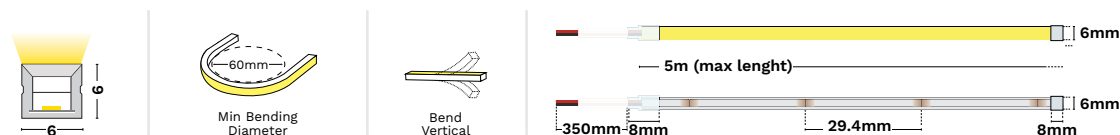

| CODE | CCT | W/M | LM/M | LM/W | UNIT CUT | REEL | DIMENISIONS | MAX L (M) |
|---------|-------|-----|------|------|----------|------|-------------|-----------|
| 9540114 | 2700K | 8 | 700 | 88 | 29.4mm | 5m | 6 x 6mm | 5m |
| 9540115 | 3000K | 8 | 731 | 91 | 29.4mm | 5m | 6 x 6mm | 5m |
| 9540116 | 4000K | 8 | 756 | 95 | 29.4mm | 5m | 6 x 6mm | 5m |



COMMON ACCESSORIES


| Input cap (Straight Outlet) | Input cap (Bottom/ Side Outlet) | End cap | Bracket | Aluminium Profile |
|-----------------------------|---------------------------------|---------|---------|-------------------|
| 9540117 | 9540118 | 9540119 | 9540121 | 9540122 |

Kema 4x10


ESSENTIAL



- IP67 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance

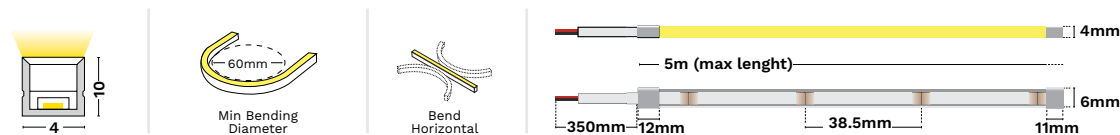

| CODE | CCT | W/M | LM/M | LM/W | UNIT CUT | REEL | DIMENISIONS | MAX L (M) |
|---------|-------|-----|------|------|----------|------|-------------|-----------|
| 9540107 | 2700K | 10 | 393 | 39 | 38.5mm | 10m | 4 x 10mm | 5m |
| 9540108 | 3000K | 10 | 425 | 43 | 38.5mm | 10m | 4 x 10mm | 5m |
| 9540109 | 4000K | 10 | 490 | 49 | 38.5mm | 10m | 4 x 10mm | 5m |



COMMON ACCESSORIES


| Bracket | Aluminium Profile | Aluminium Profile |
|---------|-------------------|-------------------|
| 9540111 | 9540112 | 9540113 |

Kema R18

ESSENTIAL



- IP65 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance

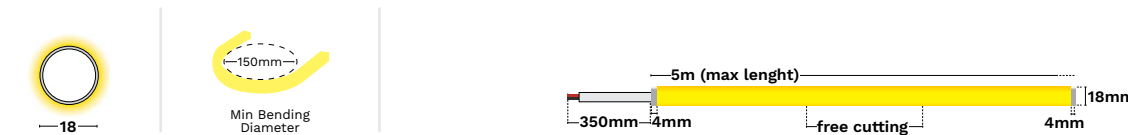

| CODE | CCT | W/M | LM/M | LM/W | UNIT CUT | REEL | DIMENISIONS | MAX L (M) |
|---------|-------|-----|------|------|----------|------|-------------|-----------|
| 9540155 | 3000K | 12 | 766 | 64 | Free | 5m | R:18 | 5m |




Kema R23

ESSENTIAL



- IP65 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance

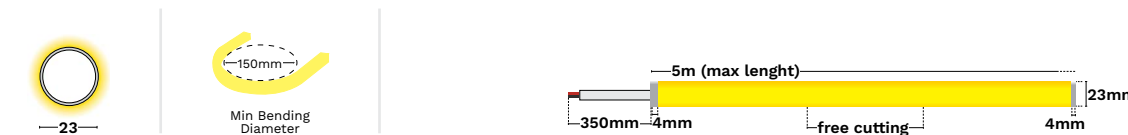

| CODE | CCT | W/M | LM/M | LM/W | UNIT CUT | REEL | DIMENISIONS | MAX L (M) |
|---------|-------|-----|------|------|----------|------|-------------|-----------|
| 9540159 | 3000K | 14 | 955 | 68 | Free | 5m | R:23 | 5m |



R18 ACCESSORIES

| Input cap | End cap | Plastic Bracket (clips) |
|-----------|---------|-------------------------|
| 9540156 | 9540157 | 9540158 |

R23 ACCESSORIES

| Input cap | End cap | Plastic Bracket (clips) |
|-----------|---------|-------------------------|
| 9540161 | 9540162 | 9540163 |



UNDERWATER


- 01. SIDE / TOP BEND OPTIONAL
 - 02. IP68 / IK10 PROTECTION
 - 03. MULTIPLE CCT, DMX / SPI
-

Gomu 16x17


PRO UNDERWATER



- IP68 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance





1. Bottom Entry Cable 4m
2. Made of PU
3. Chlorine resistance $\leq 5\text{PPM}$
4. 5m underwater depth

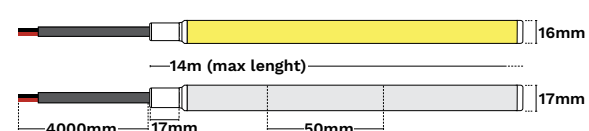


| CODE | CCT | W/M | LM/M | LM/W | SDCM | UNIT CUT | REEL | DIMENISIONS | MAX L (M) |
|---------|-------|-----|------|------|------|----------|------|-------------|-----------|
| 9530035 | 3000K | 10 | 639 | 64 | <3 | 50mm | 14m | 16 x 17mm | 14m |



- IP68 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance



1. Bottom Entry Cable 4m
2. Made of PU
3. Chlorine resistance $\leq 5\text{PPM}$
4. 5m underwater depth

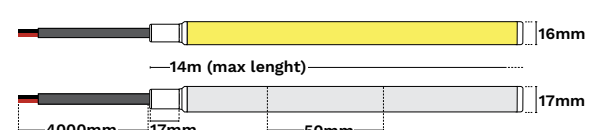

| CODE | CCT | W/M | LM/M | LM/W | SDCM | UNIT CUT | REEL | DIMENISIONS | MAX L (M) |
|---------|-------|-----|------|------|------|----------|------|-------------|-----------|
| 9530038 | 3000K | 10 | 572 | 57 | <3 | 50mm | 14m | 16 x 17mm | 14m |



COMMON ACCESSORIES

Plastic Profile 1m



9530020

Mounting Clip




9530013




Kema 16x16

ESSENTIAL

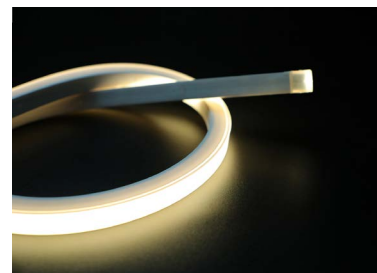

- IP68 protection level
- Salt solution resistance
- UV resistance

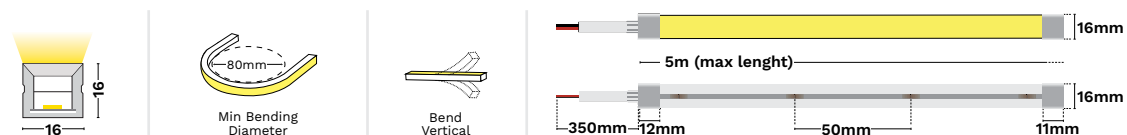

| CODE | CCT | W/M | LM/M | LM/W | UNIT CUT | REEL | DIMENISIONS | MAX L (M) |
|---------|-------|-----|------|------|----------|------|-------------|-----------|
| 9540132 | 3000K | 14 | 759 | 54 | 50mm | 6m | 16 x 16mm | 5m |
| 9540133 | 4000K | 14 | 875 | 63 | 50mm | 6m | 16 x 16mm | 5m |



ACCESSORIES


| Bracket | Aluminium Profile 1m | Aluminium Profile 2m | Aluminium Profile 1m (for intergrated end cap) |
|---------|----------------------|----------------------|--|
| | | | |
| 9540149 | 9540151 | 9540152 | 9540153 |

Kema 20x18

ESSENTIAL



- IP68 protection level
- Salt solution resistance
- UV resistance
- SPI

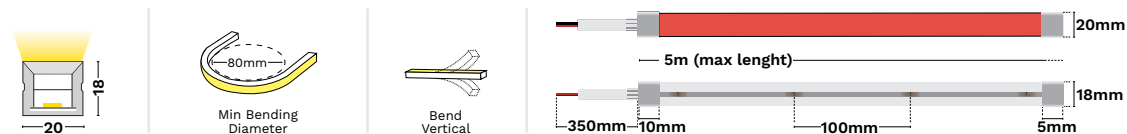

DIGITAL RGBW

| CODE | CCT | W/M | LM/M | LM/W | UNIT CUT | REEL | DIMENISIONS | MAX L (M) |
|---------|------------|-----|------|------|----------|------|-------------|-----------|
| 9540134 | RGBW-3000K | 16 | 507 | 32 | 100mm | 5m | 20 x 18mm | 5m |



ACCESSORIES


| Input cap (Straight Outlet) | End cap | Input cap (Bottom/Side Outlet) | Bracket | Aluminium Profile 1m |
|-----------------------------|---------|--------------------------------|---------|----------------------|
| | | | | |
| 9540135 | 9540136 | 9540137 | 9540138 | 9540139 |

Gomu 16x15

PRO



- IP68 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance

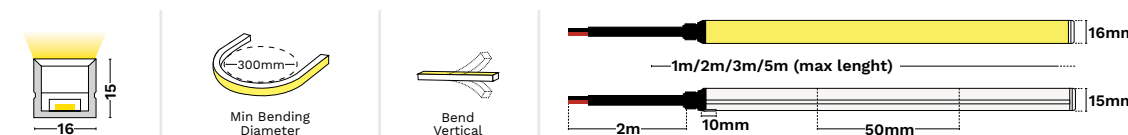

| CODE | CCT | W/M | LM/M | LM/W | UNIT CUT | REEL | DIMENISIONS | MAX L (M) |
|---------|-------|-----|------|------|----------|------|-------------|-----------|
| 9540035 | 3000K | 10 | 530 | 51 | 50mm | 1m | 16 x 15mm | 1m |
| 9540036 | 3000K | 10 | 530 | 51 | 50mm | 2m | 16 x 15mm | 2m |
| 9540037 | 3000K | 10 | 530 | 51 | 50mm | 3m | 16 x 15mm | 3m |
| 9540038 | 3000K | 10 | 530 | 51 | 50mm | 5m | 16 x 15mm | 5m |



ACCESSORIES




| Plastic Profile 1m | Mounting Clips |
|--------------------|----------------|
| | |
| 9540039 | 9540040 |

Kema 10x18

ESSENTIAL



- IP68 protection level
- UV resistance

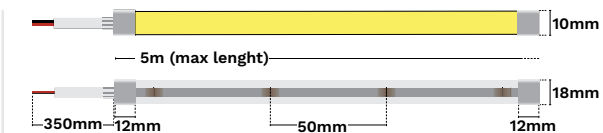

| CODE | CCT | W/M | LM/M | LM/W | UNIT CUT | REEL | DIMENISIONS | MAX L (M) |
|---------|-------|-----|------|------|----------|------|-------------|-----------|
| 9540141 | 3000K | 14 | 578 | 41 | 50mm | 5m | 10 x 18mm | 5m |
| 9540142 | 4000K | 14 | 590 | 42 | 50mm | 5m | 10 x 18mm | 5m |



ACCESSORIES



| End Cap | Bracket | Aluminium Profile | Aluminium Profile (for intergrated end cap) 1m | Stainless steel bendable profile |
|---------|---------|--------------------------|--|----------------------------------|
| | | | | |
| 9540178 | 9540179 | 1m 9540181 2m 9540182 | 9540183 | 0.5m 9540184 1m 9540185 |

Gomu 12x20

PRO



- IP68 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance

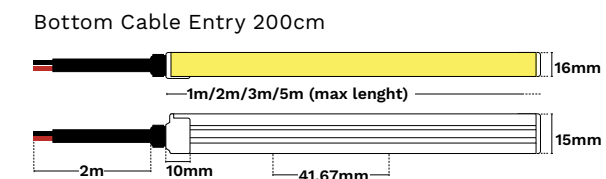

| CODE | CCT | W/M | LM/M | LM/W | SDCM | UNIT CUT | REEL | DIMENISIONS | MAX L (M) |
|---------|-------|-----|------|------|------|----------|------|-------------|-----------|
| 9540041 | 3000K | 10 | 389 | 37 | <3 | 41.67mm | 1m | 12 x 20mm | 1m |
| 9540042 | 3000K | 10 | 389 | 37 | <3 | 41.67mm | 2m | 12 x 20mm | 2m |
| 9540043 | 3000K | 10 | 389 | 37 | <3 | 41.67mm | 3m | 12 x 20mm | 3m |
| 9540044 | 3000K | 10 | 389 | 37 | <3 | 41.67mm | 5m | 12 x 20mm | 5m |



ACCESSORIES





| Mounting Clips |
|----------------|
| |
| 9540045 |

Kema 12x20

ESSENTIAL




- IP68 protection level
- Salt solution resistance
- UV resistance
- SPI

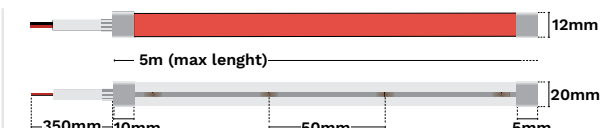

DIGITAL RGBW

| CODE | CCT | W/M | LM/M | LM/W | UNIT CUT | REEL | DIMENISIONS | MAX L (M) |
|---------|------------|-----|------|------|----------|------|-------------|-----------|
| 9540143 | RGBW-3000K | 16 | 532 | 33 | 50mm | 5m | 12 x 20mm | 5m |

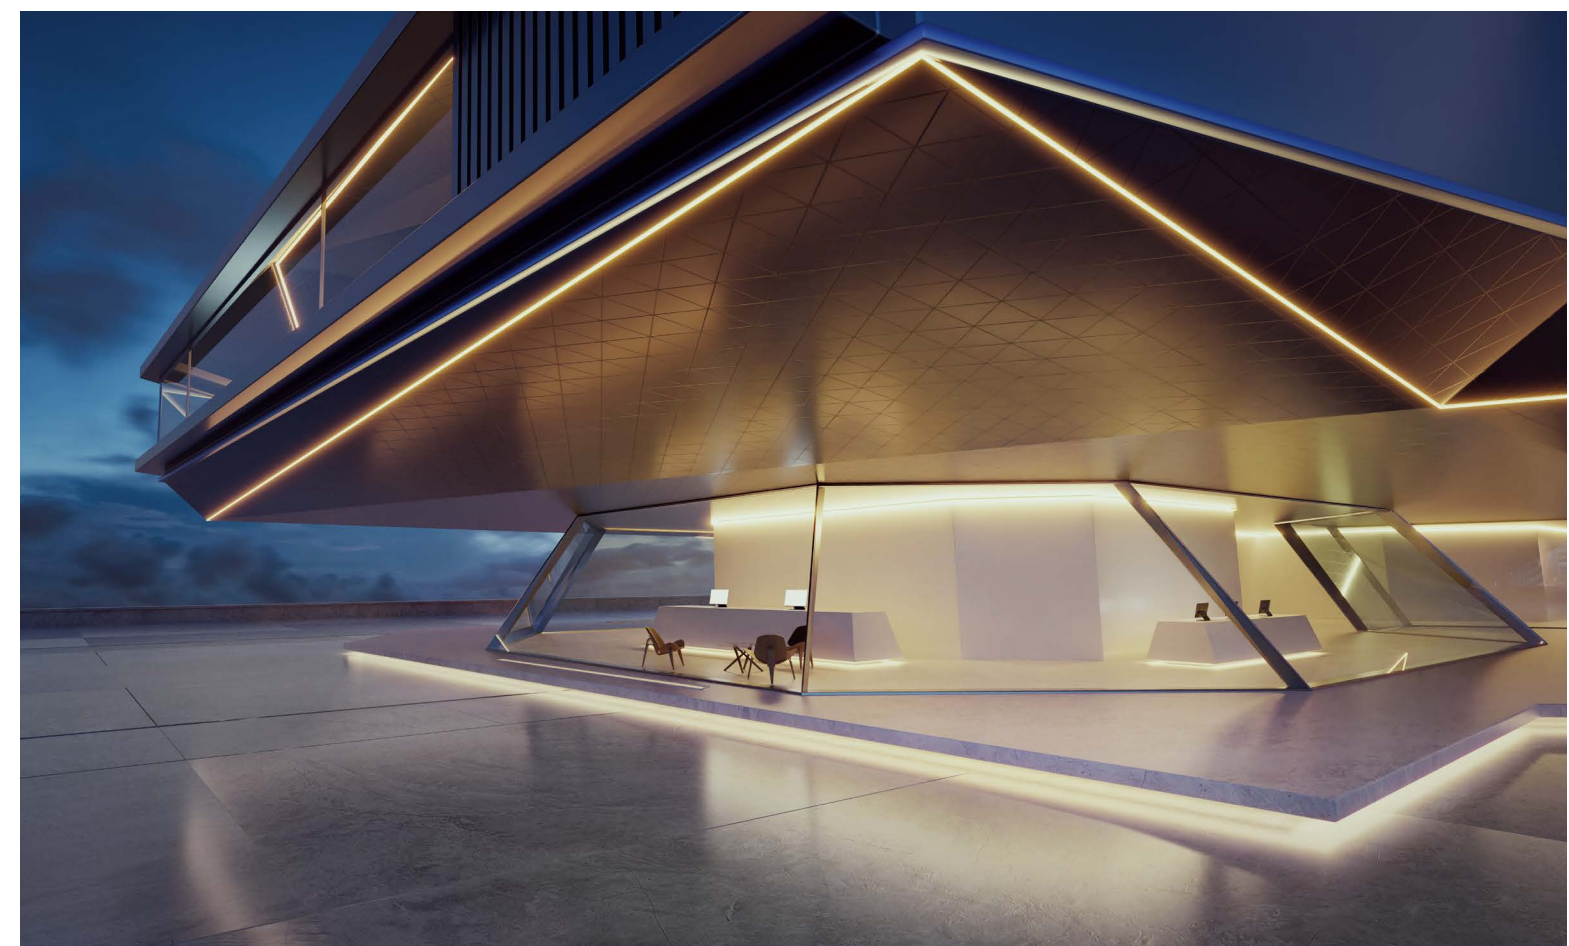



LED STRIPS
COB / SMD

LED STRIPS

1. SMD series
2. COB series
3. Silicon series
4. High voltage series
5. High efficiency
6. Broad range of IP protection

Solid ESSENTIAL


PHOTOMETRIC PARAMETERS

| IP | CODE | CCT | LUMEN/M | LUMEN/W |
|------|---------|-------|---------|---------|
| | 9540104 | 2700K | 1220 | 102 |
| IP67 | 9540105 | 3000K | 1260 | 105 |
| | 9540106 | 4000K | 1295 | 108 |

*Comon Aluminium profiles can be used for the installation
see page 58-59

BASIC PARAMETERS

| | |
|---------------------------|-----------------------|
| TYPE OF CHIP | SMD |
| POWER | 12 W/m |
| VOLTAGE | DC24V |
| LEDS/M | 288 |
| LEDS DISTANCE | - |
| CUTTING UNIT | 27.77mm |
| CRI (Ra) | 92 |
| SDCM CHIP | <3 |
| SDCM (final product) | <3 |
| BEAM ANGLE | 180° |
| DIMMING TYPE | TRIAC / Dali 2 / 0-10 |
| LIFETIME | >54000 |
| WARRANTY | 5 Years |
| WORKING TEMP | -25°C - 45°C |
| MAX LENGHT (single input) | 5m |
| LENGHT/REEL | 5m |
| WIDTH | 10mm |
| HEIGHT | 5mm |



One PRO


PHOTOMETRIC PARAMETERS

| IP | CODE | CCT | LUMEN/M | LUMEN/W |
|------|---------|-------|---------|---------|
| | 9530037 | 2700K | 790 | 79 |
| IP65 | 9540031 | 3000K | 820 | 82 |
| | 9530039 | 4000K | 850 | 85 |

*Comon Aluminium profiles can be used for the installation
see page 58-59

BASIC PARAMETERS

| | |
|---------------------------|-----------------------|
| TYPE OF CHIP | SMD |
| POWER | 10 W/m |
| VOLTAGE | DC24V |
| LEDS/M | 280 |
| LEDS DISTANCE | - |
| CUTTING UNIT | 25mm |
| CRI (Ra) | 94 |
| SDCM CHIP | <3 |
| SDCM (final product) | <3 |
| BEAM ANGLE | 180° |
| DIMMING TYPE | TRIAC / Dali 2 / 0-10 |
| LIFETIME | >54000 |
| WARRANTY | 5 Years |
| WORKING TEMP | -25°C - 45°C |
| MAX LENGHT (single input) | 5m |
| LENGHT/REEL | 5m |
| WIDTH | 10mm |
| HEIGHT | 6mm |



ACCESSORIES

| | | |
|---|---|---|
| Mounting Clip | Silicone End Cap | Silicone closed end cap |
|  |  |  |
| 9540032 | 9540033 | 9540034 |

Vida

ESSENTIAL








PHOTOMETRIC PARAMETERS

| IP | CODE | CCT | LUMEN/M | LUMEN/W |
|------|---------|-------|---------|---------|
| IP20 | 9540063 | 2700K | 1016 | 87 |
| | 9540064 | 3000K | 1203 | 100 |
| | 9540065 | 4000K | 1368 | 114 |
| IP65 | 9540069 | 2700K | 1057 | 88 |
| | 9540070 | 3000K | 1353 | 113 |
| | 9540071 | 4000K | 1156 | 96 |
| IP68 | 9540072 | 2700K | 1107 | 92 |
| | 9540073 | 3000K | 1065 | 89 |
| | 9540074 | 4000K | 1356 | 113 |

*Comon Aluminium profiles can be used for the installation see page 58-59

BASIC PARAMETERS

| TYPE OF CHIP | COB |
|---------------------------|-----------------------|
| POWER | 12 W/m |
| VOLTAGE | DC24V |
| LEDS/M | 480 |
| LEDS DISTANCE | - |
| CUTTING UNIT | 50mm |
| CRI (Ra) | 91 |
| SDCM CHIP | <3 |
| SDCM (final product) | <3 |
| BEAM ANGLE | 180° |
| DIMMING TYPE | TRIAC / Dali 2 / 0-10 |
| LIFETIME | >54000 |
| WARRANTY | 5 Years |
| WORKING TEMP | -25°C - 45°C |
| MAX LENGHT (single input) | 5m |
| LENGHT/REEL | 5m |
| WIDTH | 10mm / 12mm |
| HEIGHT | 2.2mm / 4.5mm |

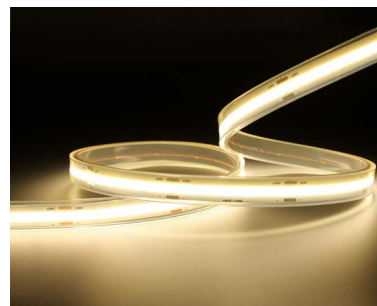

Goro

PRO



PHOTOMETRIC PARAMETERS

| IP | CODE | CCT | LUMEN/M | LUMEN/W |
|------|---------|-------|---------|---------|
| IP20 | 9530034 | 2700K | 1180 | 118 |
| | 9540052 | 3000K | 1250 | 125 |
| | 9530036 | 4000K | 1320 | 132 |

*Comon Aluminium profiles can be used for the installation see page 58-59

BASIC PARAMETERS

| TYPE OF CHIP | COB |
|---------------------------|-----------------------|
| POWER | 10 W/m |
| VOLTAGE | DC24V |
| LEDS/M | 480 |
| LEDS DISTANCE | - |
| CUTTING UNIT | 50mm |
| CRI (Ra) | 92 |
| SDCM CHIP | <3 |
| SDCM (final product) | <3 |
| BEAM ANGLE | 180° |
| DIMMING TYPE | TRIAC / Dali 2 / 0-10 |
| LIFETIME | >54000 |
| WARRANTY | 5 Years |
| WORKING TEMP | -25°C - 45°C |
| MAX LENGHT (single input) | 5m |
| LENGHT/REEL | 5m |
| WIDTH | 10mm |
| HEIGHT | 1.8mm |



Vida Slim

ESSENTIAL



PHOTOMETRIC PARAMETERS

| IP | CODE | CCT | LUMEN/M | LUMEN/W |
|------|---------|-------|---------|---------|
| IP20 | 9540060 | 2700K | 755 | 95 |
| | 9540061 | 3000K | 833 | 105 |
| | 9540062 | 4000K | 916 | 115 |
| IP65 | 9540066 | 2700K | 781 | 98 |
| | 9540067 | 3000K | 867 | 108 |
| | 9540068 | 4000K | 931 | 117 |

*Comon Aluminium profiles can be used for the installation see page 58-59

BASIC PARAMETERS

| | |
|---------------------------|-----------------------|
| TYPE OF CHIP | COB |
| POWER | 8 W/m |
| VOLTAGE | DC24V |
| LEDS/M | 320 |
| LEDS DISTANCE | - |
| CUTTING UNIT | 50mm |
| CRI (Ra) | 91 |
| SDCM CHIP | <3 |
| SDCM (final product) | <3 |
| BEAM ANGLE | 180° |
| DIMMING TYPE | TRIAC / Dali 2 / 0-10 |
| LIFETIME | >54000 |
| WARRANTY | 5 Years |
| WORKING TEMP | -25°C - 45°C |
| MAX LENGHT (single input) | 5m |
| LENGHT/REEL | 5m |
| WIDTH | 8mm / 10mm |
| HEIGHT | 2mm / 2.4mm |

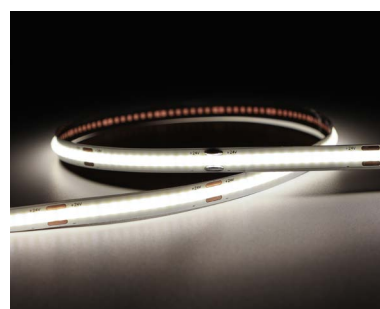

Honor Slim

ESSENTIAL


PHOTOMETRIC PARAMETERS

| IP | CODE | CCT | LUMEN/M | LUMEN/W |
|------|---------|-------|---------|---------|
| IP20 | 9540088 | 2700K | 910 | 95 |
| | 9540089 | 3000K | 960 | 100 |
| | 9540090 | 4000K | 980 | 102 |
| IP62 | 9540091 | 2700K | 783 | 82 |
| | 9540092 | 3000K | 870 | 91 |
| | 9540093 | 4000K | 946 | 100 |

*Comon Aluminium profiles can be used for the installation see page 58-59

BASIC PARAMETERS

| | |
|---------------------------|-----------------------|
| TYPE OF CHIP | SMD |
| POWER | 9.6 W/m |
| VOLTAGE | DC24V |
| LEDS/M | 120 |
| LEDS DISTANCE | 8.3mm |
| CUTTING UNIT | 50mm |
| CRI (Ra) | 93 |
| SDCM CHIP | <3 |
| SDCM (final product) | <3 |
| BEAM ANGLE | 120° |
| DIMMING TYPE | TRIAC / Dali 2 / 0-10 |
| LIFETIME | >54000 |
| WARRANTY | 5 Years |
| WORKING TEMP | -25°C - 45°C |
| MAX LENGHT (single input) | 5m |
| LENGHT/REEL | 5m |
| WIDTH | 8mm |
| HEIGHT | 1.4mm / 2.8mm |



Honor

ESSENTIAL



PHOTOMETRIC PARAMETERS

| IP | CODE | CCT | LUMEN/M | LUMEN/W |
|------|---------|-------|---------|---------|
| IP20 | 9540094 | 2700K | 1370 | 95 |
| | 9540096 | 3000K | 1440 | 100 |
| | 9540098 | 4000K | 1470 | 102 |
| IP62 | 9540095 | 2700K | 1159 | 80 |
| | 9540097 | 3000K | 1274 | 88 |
| | 9540099 | 4000K | 1357 | 94 |

*Comon Aluminium profiles can be used for the installation see page 58-59

BASIC PARAMETERS

| | |
|---------------------------|-----------------------|
| TYPE OF CHIP | SMD |
| POWER | 14.4 W/m |
| VOLTAGE | DC24V |
| LEDS/M | 180 |
| LEDS DISTANCE | 5.6mm |
| CUTTING UNIT | 33.3mm |
| CRI (Ra) | 93 |
| SDCM CHIP | <3 |
| SDCM (final product) | <3 |
| BEAM ANGLE | 120° |
| DIMMING TYPE | TRIAC / Dali 2 / 0-10 |
| LIFETIME | >54000 |
| WARRANTY | 5 Years |
| WORKING TEMP | -25°C - 45°C |
| MAX LENGHT (single input) | 5m |
| LENGHT/REEL | 5m |
| WIDTH | 10mm |
| HEIGHT | 1.4mm / 2.8mm |



Aktis

ESSENTIAL


PHOTOMETRIC PARAMETERS

| IP | CODE | CCT | LUMEN/M | LUMEN/W |
|------|---------|-------|---------|---------|
| IP20 | 9540053 | 3000K | 1085 | 71 |
| | 9540054 | 4000K | 1216 | 84 |

*Comon Aluminium profiles can be used for the installation see page 58-59

BASIC PARAMETERS

| | |
|---------------------------|-----------------------|
| TYPE OF CHIP | SMD |
| POWER | 14.4 W/m |
| VOLTAGE | DC24V |
| LEDS/M | 120 |
| LEDS DISTANCE | - |
| CUTTING UNIT | 50mm |
| CRI (Ra) | 93 |
| SDCM CHIP | <3 |
| SDCM (final product) | <3 |
| BEAM ANGLE | 120° |
| DIMMING TYPE | TRIAC / Dali 2 / 0-10 |
| LIFETIME | >54000 |
| WARRANTY | 5 Years |
| WORKING TEMP | -25°C - 45°C |
| MAX LENGHT (single input) | 5m |
| LENGHT/REEL | 5m |
| WIDTH | 8mm |
| HEIGHT | 2mm |



Honor Plus

ESSENTIAL


PHOTOMETRIC PARAMETERS

| IP | CODE | CCT | LUMEN/M | LUMEN/W |
|------|---------|-------|---------|---------|
| | 9540101 | 2700K | 1820 | 95 |
| IP20 | 9540102 | 3000K | 1920 | 100 |
| | 9540103 | 4000K | 1960 | 102 |

*Comon Aluminium profiles can be used for the installation see page 58-59

BASIC PARAMETERS

| TYPE OF CHIP | SMD |
|---------------------------|-----------------------|
| POWER | 19.2W/m |
| VOLTAGE | DC24V |
| LEDS/M | 240 |
| LEDS DISTANCE | 4.2mm |
| CUTTING UNIT | 25mm |
| CRI (Ra) | 93 |
| SDCM CHIP | <3 |
| SDCM (final product) | <3 |
| BEAM ANGLE | 120° |
| DIMMING TYPE | TRIAC / Dali 2 / 0-10 |
| LIFETIME | >54000 |
| WARRANTY | 5 Years |
| WORKING TEMP | -25°C - 45°C |
| MAX LENGHT (single input) | 5m |
| LENGHT/REEL | 5m |
| WIDTH | 10mm |
| HEIGHT | 1.4mm |



Honor Slim Plus

ESSENTIAL


PHOTOMETRIC PARAMETERS

| IP | CODE | CCT | LUMEN/M | LUMEN/W |
|------|---------|-------|---------|---------|
| IP20 | 9621526 | 3000K | 1440 | 100 |
| | 9621527 | 4000K | 1470 | 102 |

*Comon Aluminium profiles can be used for the installation see page 58-59

BASIC PARAMETERS

| TYPE OF CHIP | SMD |
|---------------------------|-----------------------|
| POWER | 14.4W/m |
| VOLTAGE | DC24V |
| LEDS/M | 180 |
| LEDS DISTANCE | - |
| CUTTING UNIT | 33mm |
| CRI (Ra) | 94 |
| SDCM CHIP | <3 |
| SDCM (final product) | <3 |
| BEAM ANGLE | 120° |
| DIMMING TYPE | TRIAC / Dali 2 / 0-10 |
| LIFETIME | >54000 |
| WARRANTY | 5 Years |
| WORKING TEMP | -25°C - 45°C |
| MAX LENGHT (single input) | 5m |
| LENGHT/REEL | 5m |
| WIDTH | 8mm |
| HEIGHT | 1.4mm |



Led Strips - SMD

Aktis Plus

ESSENTIAL



PHOTOMETRIC PARAMETERS

| IP | CODE | CCT | LUMEN/M | LUMEN/W |
|------|---------|-------|---------|---------|
| IP20 | 9540055 | 3000K | 1633 | 89 |
| | 9540056 | 4000K | 1795 | 98 |

*Comon Aluminium profiles can be used for the installation
see page 58-59

BASIC PARAMETERS

| | |
|---------------------------|-----------------------|
| TYPE OF CHIP | SMD |
| POWER | 19.2 W/m |
| VOLTAGE | DC24V |
| LEDS/M | 240 |
| LEDS DISTANCE | - |
| CUTTING UNIT | 25mm |
| CRI (Ra) | 93 |
| SDCM CHIP | <3 |
| SDCM (final product) | <3 |
| BEAM ANGLE | 120° |
| DIMMING TYPE | TRIAC / Dali 2 / 0-10 |
| LIFETIME | >54000 |
| WARRANTY | 5 Years |
| WORKING TEMP | -25°C - 45°C |
| MAX LENGHT (single input) | 5m |
| LENGHT/REEL | 5m |
| WIDTH | 10mm |
| HEIGHT | 2mm |



COMO HE PRO


PHOTOMETRIC PARAMETERS

| IP | CODE | CCT | LUMEN/M | LUMEN/W |
|------|---------|-------|---------|---------|
| IP20 | 9540186 | 3000K | 2160 | 154 |
| | 9540187 | 4000K | 2270 | 162 |

*Comon Aluminium profiles can be used for the installation see page 58-59

BASIC PARAMETERS

| | |
|---------------------------|-----------------------|
| TYPE OF CHIP | SMD |
| POWER | 14 W/m |
| VOLTAGE | DC24V |
| LEDS/M | 128 |
| LEDS DISTANCE | 7.8mm |
| CUTTING UNIT | 62.5mm |
| CRI (Ra) | 92 |
| SDCM CHIP | <3 |
| SDCM (final product) | <3 |
| BEAM ANGLE | 120° |
| DIMMING TYPE | TRIAC / Dali 2 / 0-10 |
| LIFETIME | >54000 |
| WARRANTY | 5 Years |
| WORKING TEMP | -25°C - 45°C |
| MAX LENGHT (single input) | 5m |
| LENGHT/REEL | 5m |
| WIDTH | 10mm |
| HEIGHT | 1.4mm |



PERFORMANCE HE PRO


PHOTOMETRIC PARAMETERS

| IP | CODE | CCT | LUMEN/M | LUMEN/W |
|------|---------|-------|---------|---------|
| IP20 | 9540188 | 3000K | 1225 | 175 |
| | 9540189 | 4000K | 1300 | 186 |

*Comon Aluminium profiles can be used for the installation see page 58-59

BASIC PARAMETERS

| | |
|---------------------------|-----------------------|
| TYPE OF CHIP | SMD |
| POWER | 7 W/m |
| VOLTAGE | DC24V |
| LEDS/M | 180 |
| LEDS DISTANCE | 5.56mm |
| CUTTING UNIT | 62.5mm |
| CRI (Ra) | 92 |
| SDCM CHIP | <3 |
| SDCM (final product) | <3 |
| BEAM ANGLE | 120° |
| DIMMING TYPE | TRIAC / Dali 2 / 0-10 |
| LIFETIME | >54000 |
| WARRANTY | 5 Years |
| WORKING TEMP | -25°C - 45°C |
| MAX LENGHT (single input) | 5m |
| LENGHT/REEL | 5m |
| WIDTH | 10mm |
| HEIGHT | 2.1mm |



Led Strips - SMD

Free HE PRO



PHOTOMETRIC PARAMETERS

| IP | CODE | CCT | LUMEN/M | LUMEN/W |
|------|---------|-------|---------|---------|
| | 9621540 | 2700K | 1080 | 90 |
| IP20 | 9621541 | 3000K | 1110 | 93 |
| | 9621542 | 4000K | 1140 | 95 |

*Comon Aluminium profiles can be used for the installation
see page 58-59

BASIC PARAMETERS

| | |
|---------------------------|-----------------------|
| TYPE OF CHIP | SMD |
| POWER | 12 W/m |
| VOLTAGE | DC24V |
| LEDS/M | 180 |
| LEDS DISTANCE | - |
| CUTTING UNIT | free |
| CRI (Ra) | 90 |
| SDCM CHIP | <3 |
| SDCM (final product) | <3 |
| BEAM ANGLE | 120° |
| DIMMING TYPE | TRIAC / Dali 2 / 0-10 |
| LIFETIME | >54000 |
| WARRANTY | 5 Years |
| WORKING TEMP | -25°C - 45°C |
| MAX LENGHT (single input) | 5m |
| LENGHT/REEL | 5m |
| WIDTH | 6mm |
| HEIGHT | 1.4mm |

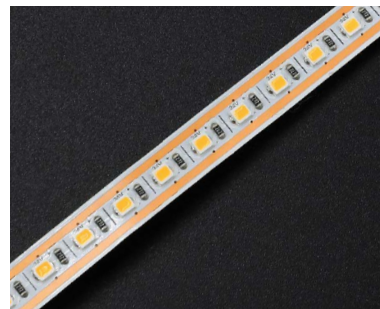

Honor High Voltage

ESSENTIAL


PHOTOMETRIC PARAMETERS

| IP | CODE | CCT | LUMEN/M | LUMEN/W |
|------|---------|-------|---------|---------|
| | 9621528 | 2700K | 790 | 88 |
| IP65 | 9621529 | 3000K | 810 | 90 |
| | 9621530 | 4000K | 825 | 92 |

*Comon Aluminium profiles can be used for the installation see page 58-59

BASIC PARAMETERS

| TYPE OF CHIP | COB |
|---------------------------|--------------|
| POWER | 9 W/m |
| VOLTAGE | 220-230V |
| LEDS/M | 120 |
| LEDS DISTANCE | - |
| CUTTING UNIT | 1000mm |
| CRI (Ra) | 80 |
| SDCM CHIP | <5 |
| SDCM (final product) | <5 |
| BEAM ANGLE | 120° |
| DIMMING TYPE | N/A |
| LIFETIME | >34000 |
| WARRANTY | 2 Years |
| WORKING TEMP | -25°C - 45°C |
| MAX LENGHT (single input) | 50m |
| LENGHT/REEL | 50m |
| WIDTH | 14mm |
| HEIGHT | 4.5mm |



Vida High Voltage

ESSENTIAL


PHOTOMETRIC PARAMETERS

| IP | CODE | CCT | LUMEN/M | LUMEN/W |
|------|---------|-------|---------|---------|
| | 9621533 | 2700K | 525 | 66 |
| IP65 | 9621534 | 3000K | 560 | 70 |
| | 9621535 | 4000K | 600 | 75 |

*Comon Aluminium profiles can be used for the installation see page 58-59

BASIC PARAMETERS

| TYPE OF CHIP | COB |
|---------------------------|--------------|
| POWER | 8 W/m |
| VOLTAGE | 220-230V |
| LEDS/M | 288 |
| LEDS DISTANCE | - |
| CUTTING UNIT | 1000mm |
| CRI (Ra) | 70 |
| SDCM CHIP | <5 |
| SDCM (final product) | <5 |
| BEAM ANGLE | 120° |
| DIMMING TYPE | N/A |
| LIFETIME | >34000 |
| WARRANTY | 2 Years |
| WORKING TEMP | -25°C - 45°C |
| MAX LENGHT (single input) | 50m |
| LENGHT/REEL | 50m |
| WIDTH | 12mm |
| HEIGHT | 6mm |



D2W

ESSENTIAL


PHOTOMETRIC PARAMETERS

| IP | CODE | CCT | LUMEN/M | LUMEN/W |
|------|---------|-------------|---------|---------|
| IP20 | 9621536 | 1900K-3000K | 1100 | 110 |

*Comon Aluminium profiles can be used for the installation see page 58-59

BASIC PARAMETERS

| | |
|---------------------------|----------------|
| TYPE OF CHIP | SMD |
| POWER | 10 W/m |
| VOLTAGE | DC24V |
| LEDS/M | 168 |
| LEDS DISTANCE | - |
| CUTTING UNIT | 83mm |
| CRI (Ra) | 90 |
| SDCM CHIP | <5 |
| SDCM (final product) | <5 |
| BEAM ANGLE | 120° |
| DIMMING TYPE | TRIAC / Dali 2 |
| LIFETIME | >54000 |
| WARRANTY | 5 Years |
| WORKING TEMP | -25°C - 45°C |
| MAX LENGHT (single input) | 5m |
| LENGHT/REEL | 5m |
| WIDTH | 10mm |
| HEIGHT | 2.1mm |



TW

ESSENTIAL


PHOTOMETRIC PARAMETERS


| IP | CODE | CCT | LUMEN/M | LUMEN/W |
|------|---------|--------------|---------|---------|
| IP20 | 9621537 | 2700K- 6000K | 880 | 46 |
| | 9621538 | 2700K- 6000K | 1010 | 53 |

*Comon Aluminium profiles can be used for the installation see page 58-59

BASIC PARAMETERS

| | |
|---------------------------|-----------------|
| TYPE OF CHIP | SMD2835/3527 |
| POWER | 46 W/m / 53 W/m |
| VOLTAGE | DC24V |
| LEDS/M | 120 |
| LEDS DISTANCE | - |
| CUTTING UNIT | 50mm |
| CRI (Ra) | 80 |
| SDCM CHIP | <5 |
| SDCM (final product) | <5 |
| BEAM ANGLE | 120° |
| DIMMING TYPE | Dali 2 |
| LIFETIME | >54000 |
| WARRANTY | 5 Years |
| WORKING TEMP | -25°C - 45°C |
| MAX LENGHT (single input) | 5m |
| LENGHT/REEL | 5m |
| WIDTH | 10mm |
| HEIGHT | 2.1mm |



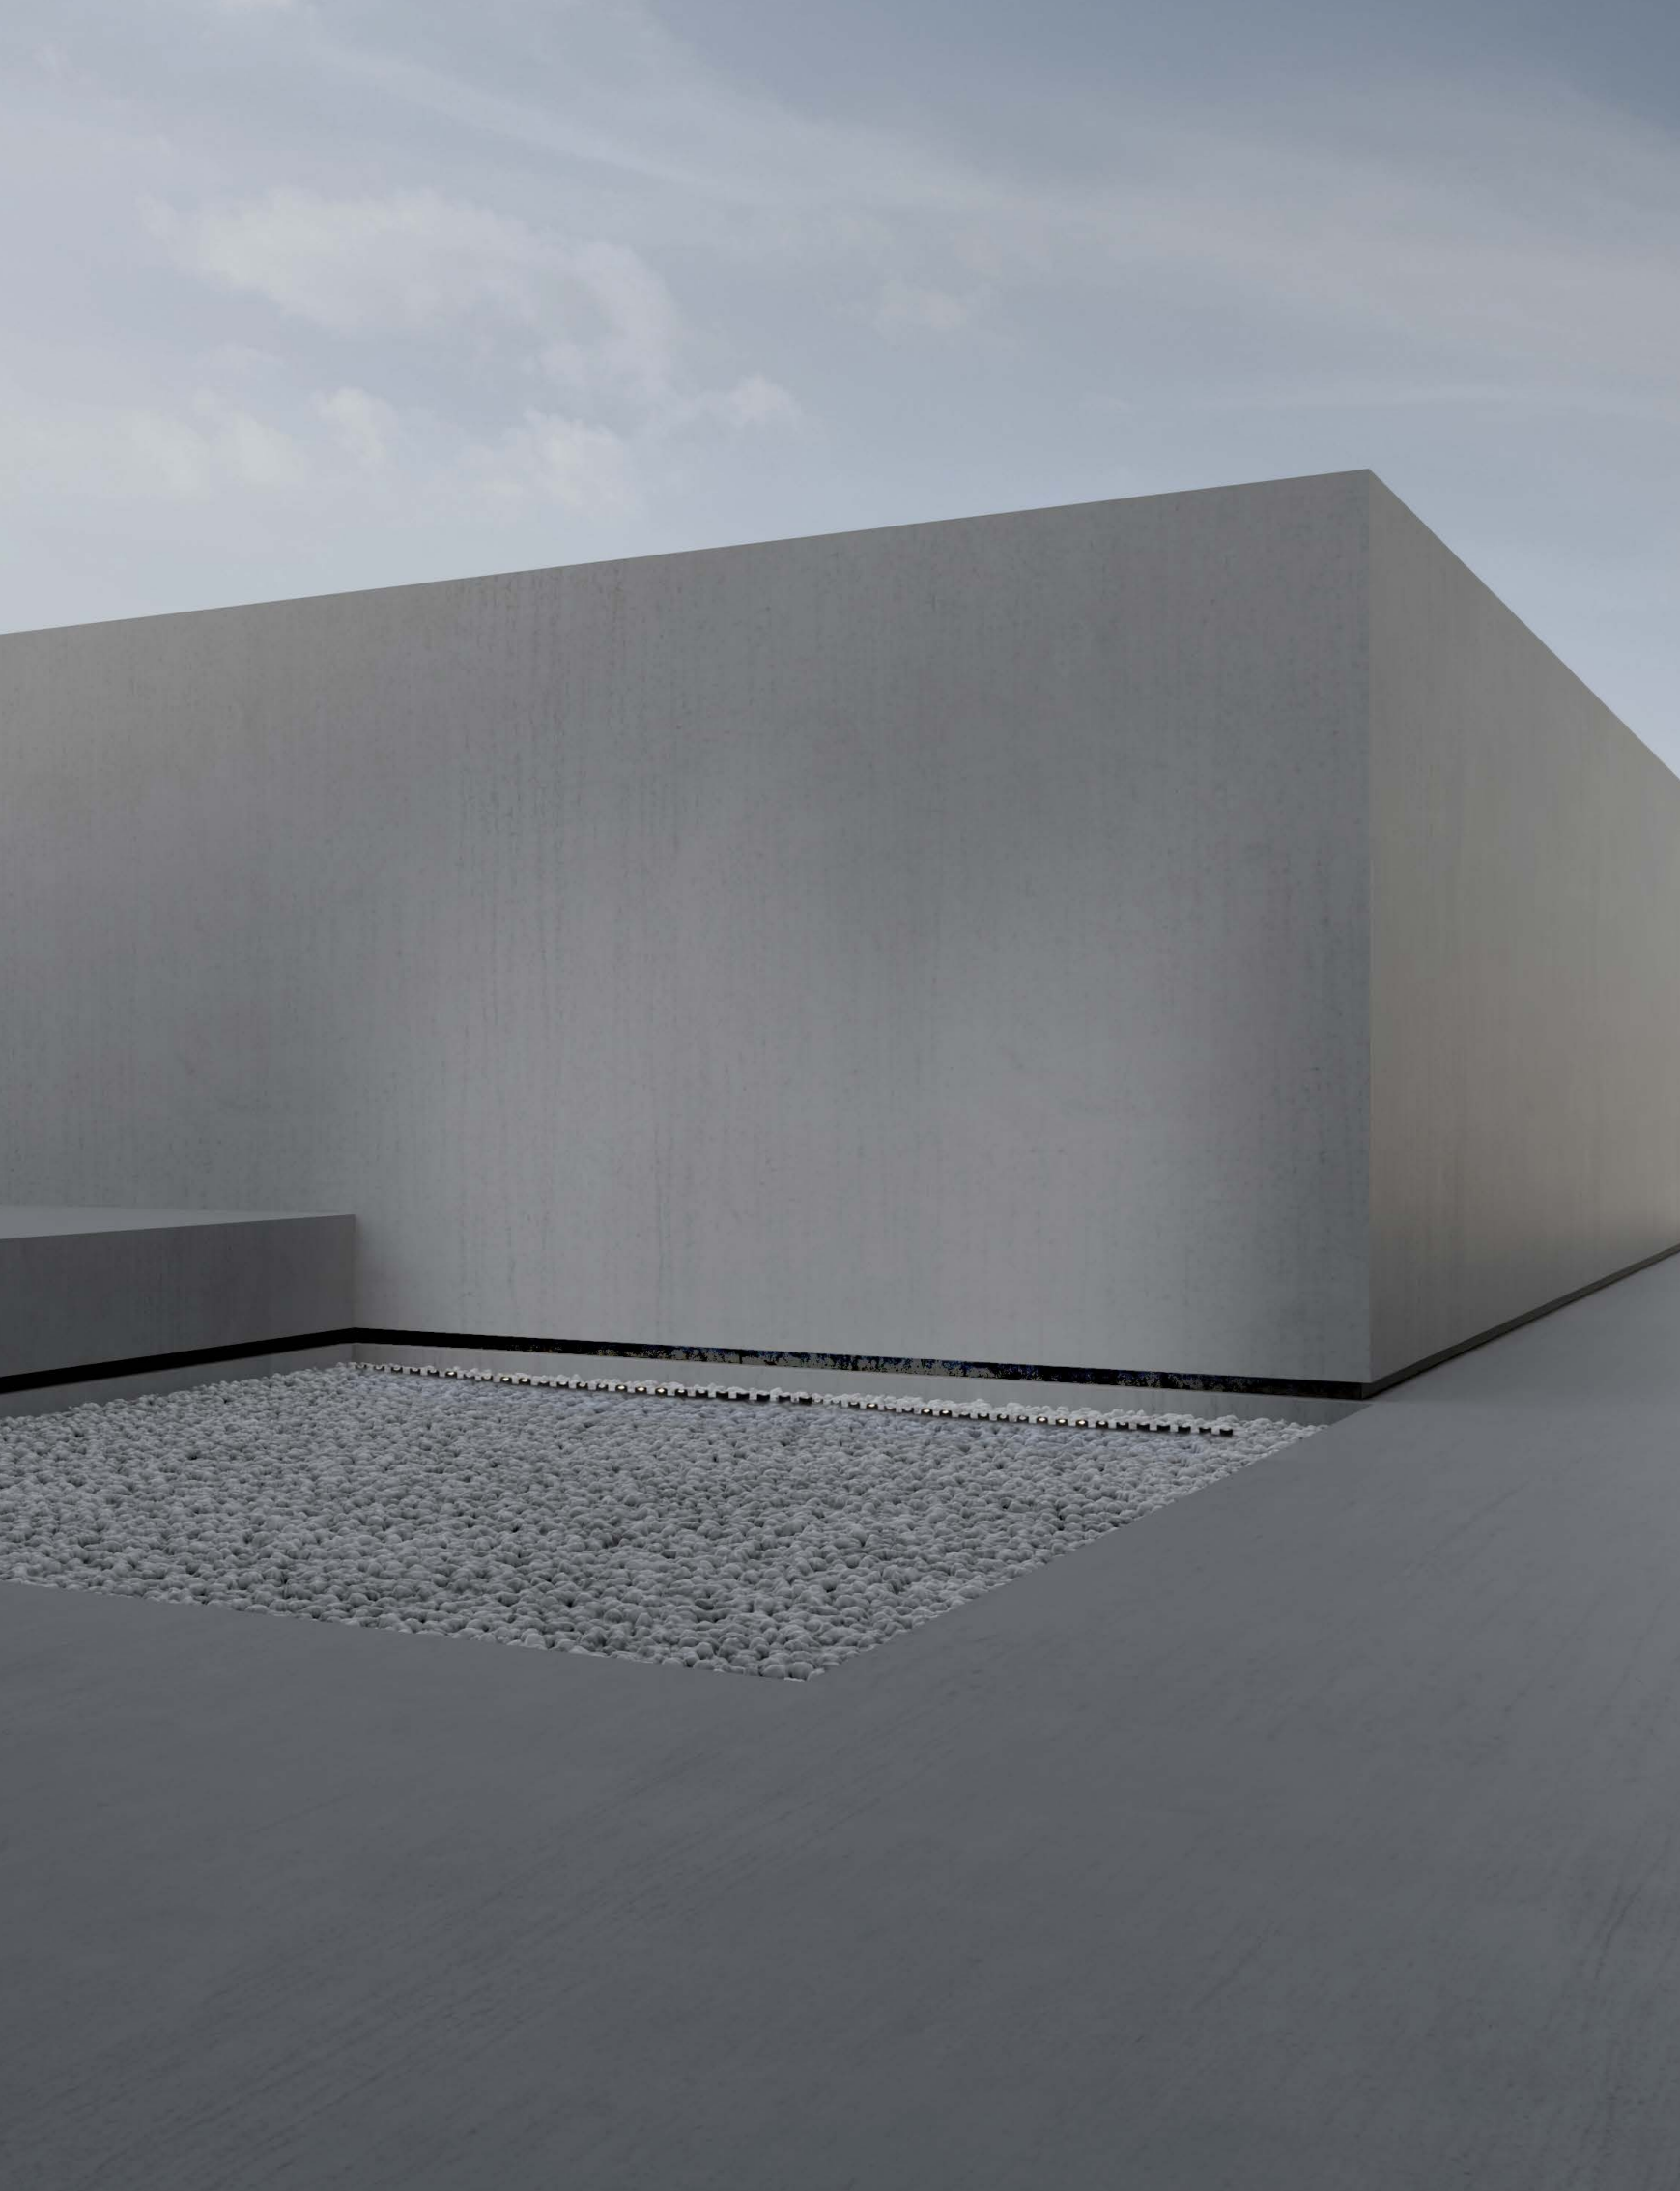

SILICON WALLWASHERS

-
1. Silicon
 2. IP67 protection
 3. High efficiency
 4. Variety of beam angles

Bine


ESSENTIAL

PHOTOMETRIC PARAMETERS

| IP | CODE | CCT | LUMEN/M | LUMEN/W |
|------|---------|-------|---------|---------|
| IP67 | 9540075 | 3000K | 1994 | 80 |
| | 9540076 | 4000K | 2108 | 84 |

BASIC PARAMETERS

| | |
|---------------------------|----------------|
| TYPE OF CHIP | COB |
| POWER | 25 W/m |
| VOLTAGE | DC24V |
| LEDS/M | 24 |
| LEDS DISTANCE | - |
| CUTTING UNIT | 41.6mm |
| CRI (Ra) | 94 |
| SDCM CHIP | <5 |
| SDCM (final product) | <5 |
| BEAM ANGLE | 30° |
| DIMMING TYPE | TRIAC / Dali 2 |
| LIFETIME | >54000 |
| WARRANTY | 5 Years |
| WORKING TEMP | -25°C - 45°C |
| MAX LENGHT (single input) | 5m |
| LENGHT/REEL | 5m |
| WIDTH | 24mm |
| HEIGHT | 18mm |

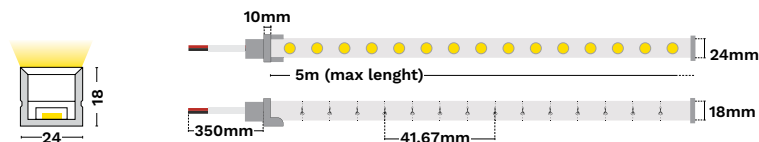

Diamond


PRO

PHOTOMETRIC PARAMETERS

| IP | CODE | CCT | LUMEN/M | LUMEN/W |
|------|---------|-------|---------|---------|
| IP67 | 9540082 | 3000K | 6628 | 83 |
| | 9540083 | 4000K | 6653 | 83 |
| | 9540084 | 3000K | 3314 | 83 |
| | 9540085 | 4000K | 3326 | 83 |

BASIC PARAMETERS

| | |
|---------------------------|----------------|
| TYPE OF CHIP | COB |
| POWER | 80W / 40W |
| VOLTAGE | DC24V |
| LEDS/M | 20 |
| LEDS DISTANCE | - |
| CUTTING UNIT | 50mm |
| CRI (Ra) | 83 |
| SDCM CHIP | <5 |
| SDCM (final product) | <5 |
| BEAM ANGLE | 20° |
| DIMMING TYPE | TRIAC / Dali 2 |
| LIFETIME | >54000 |
| WARRANTY | 5 Years |
| WORKING TEMP | -25°C - 45°C |
| MAX LENGHT (single input) | 7.2m |
| LENGHT/REEL | 2.4m / 1.2m |
| WIDTH | 22mm |
| HEIGHT | 29.8mm |

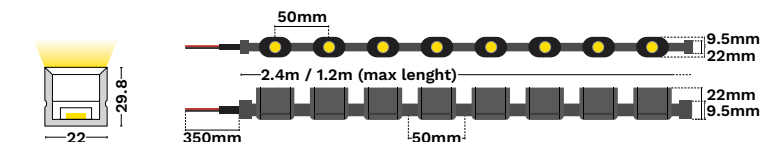

ACCESSORIES

| | | | | |
|--------------------------------|--|---------------------------|---------------------|--------------------|
| Aluminum profile 1m 9540077 | Stainless steel bendable profile 0.5m 9540078 | Aluminum clips 9540079 | Tail cap 9540080 | End Cap 9540081 |
|--------------------------------|--|---------------------------|---------------------|--------------------|

ACCESSORIES

| | |
|---------------------------|-------------------------|
| Aluminum clips 9540086 | Mounting KIT 9540087 |
|---------------------------|-------------------------|

SURFACE



13x7 surface
9254100



Thickness: 1.3mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• 4pcs clips



15x10 surface
9254101



Thickness: 0.9-1.0mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• 4pcs clips



17x7 surface
9254103



Thickness: 0.9-1.0mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• 4pcs clips



23x10 surface
9254106



Thickness: 0.9-1.0mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• 4pcs clips

TRIMLESS




55x13 trimless
9254108




Thickness: 1.1-1.2mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• No clips



35x13 trimless
9254109



Thickness: 1.1-1.2mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• No clips

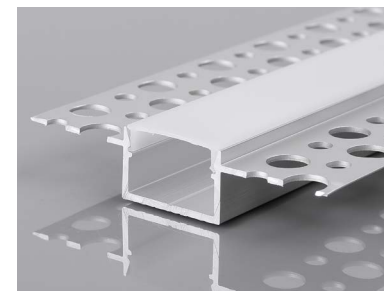

60x13 trimless
9254110



Thickness: 1.2mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• No clips



40x13 trimless
9254111



Thickness: 1.2mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• No clips

CORNER SURFACE



16x16 corner surface
9254105



Thickness: 0.9-1.0mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• 4pcs clips

RECESSED



15x10 recessed
9254102



Thickness: 0.9-1.0mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• 4pcs clips



17x7 recessed
9254104



Thickness: 0.9-1.0mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• 4pcs clips



23x10 recessed
9254107



Thickness: 0.9-1.0mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• 4pcs clips

COMPATIBILITY

| | SURFACE | | | CORNER | RECESSED | | TRIMLESS | | | | | |
|-------------------------|---------|-------|------|--------|----------|-------|----------|-------|-------|-------|-------|-------|
| | 13x7 | 15x10 | 17x7 | 23x10 | 16x16 | 15x10 | 17x7 | 23x10 | 55x13 | 35x13 | 60x13 | 40x13 |
| SOLID IP67 | | • | • | • | • | • | • | • | • | • | • | • |
| ONE IP65 | | • | • | • | • | • | • | • | • | • | • | • |
| VIDA IP20 | • | • | • | • | • | • | • | • | • | • | • | • |
| VIDA IP65 | | • | • | • | | • | • | • | | | • | • |
| VIDA IP68 | | • | • | • | | • | • | • | | | • | • |
| GORO IP20 | • | • | • | • | • | • | • | • | • | • | • | • |
| VIDA SLIM IP20 | • | • | • | • | • | • | • | • | • | • | • | • |
| VIDA SLIM IP65 | • | • | • | • | • | • | • | • | • | • | • | • |
| HONOR SLIM IP20 | • | • | • | • | • | • | • | • | • | • | • | • |
| HONOR SLIM IP62 | • | • | • | • | • | • | • | • | • | • | • | • |
| HONOR IP20 | • | • | • | • | • | • | • | • | • | • | • | • |
| HONOR IP62 | • | • | • | • | • | • | • | • | • | • | • | • |
| AKTIS IP20 | • | • | • | • | • | • | • | • | • | • | • | • |
| HONOR PLUS IP20 | • | • | • | • | • | • | • | • | • | • | • | • |
| HONOR SLIM PLUS IP20 | • | • | • | • | • | • | • | • | • | • | • | • |
| AKTIS PLUS IP20 | • | • | • | • | • | • | • | • | • | • | • | • |
| COMO HE IP20 | • | • | • | • | • | • | • | • | • | • | • | • |
| PERFORMANCE HE IP20 | • | • | • | • | • | • | • | • | • | • | • | • |
| FREE HE IP20 | • | • | • | • | • | • | • | • | • | • | • | • |
| HONOR HIGH VOLTAGE IP65 | | | • | • | | | • | • | | | • | • |
| VIDA HIGH VOLTAGE IP65 | | | • | • | | | • | • | | | • | • |
| D2W IP20 | • | • | • | • | • | • | • | • | • | • | • | • |
| TW IP20 | | • | • | • | | • | • | • | | | • | • |

LED DRIVERS

IP20

MODEL LIST

| MODEL | OUTPUT POWER | OUTPUT CURRENT | DIMENSIONS | EFFICIENCY |
|---------|--------------|----------------|---------------|------------|
| 9840100 | 60W | 2.5A | 16x5.75x1.8 | 87% |
| 9840101 | 100W | 4.2A | 18.5x6.35x2.2 | 92% |



BASIC PARAMETERS

| | |
|------------------|------------|
| INPUT VOLTAGE | 180-264Vac |
| INPUT FREQUENCY | 0/50/60 Hz |
| INPUT PF | 0,99 |
| OUTPUT VOLTAGE | 24Vdc |
| PST | <1 |
| SVM | <0,4 |
| IP | 20 |
| DIMMABLE | On/Off |
| NOMINAL LIFETIME | 100.000h |
| WARRANTY | 5 years |

LED DRIVERS

IP67

MODEL LIST

| MODEL | OUTPUT POWER | OUTPUT CURRENT | DIMENSIONS | EFFICIENCY |
|---------|--------------|----------------|--------------|------------|
| 9840105 | 150W | 6.25A | 21.4x6.8x3.8 | 93% |



BASIC PARAMETERS

| | |
|------------------|-------------|
| INPUT VOLTAGE | 108-305Vac |
| INPUT FREQUENCY | 0/50/60 Hz |
| INPUT PF | 0,99 |
| OUTPUT VOLTAGE | 24Vdc |
| PST | <1 |
| SVM | <0,4 |
| IP | 67 |
| DIMMABLE | Dali / Push |
| NOMINAL LIFETIME | 100.000h |
| WARRANTY | 5 years |

MODEL LIST

| MODEL | OUTPUT POWER | OUTPUT CURRENT | DIMENSIONS | EFFICIENCY |
|---------|--------------|----------------|-------------|------------|
| 9840102 | 80W | 3.4A | 24.15x4.8x3 | 91% |
| 9840103 | 150W | 6.25A | 28.15x4.8x3 | 92% |
| 9840104 | 200W | 8.3A | 32,15x4.8x3 | 93% |



BASIC PARAMETERS

| | |
|------------------|---------------------|
| INPUT VOLTAGE | 180-264Vac |
| INPUT FREQUENCY | 0/50/60 Hz |
| INPUT PF | 0,98 |
| OUTPUT VOLTAGE | 24Vdc |
| PST | <1 |
| SVM | <0,4 |
| IP | 20 |
| DIMMABLE | Dali / Push / 1-10V |
| NOMINAL LIFETIME | 100.000h |
| WARRANTY | 5 years |
| AUXILIARY | DC12V |


MODEL LIST

| MODEL | OUTPUT POWER | OUTPUT CURRENT | DIMENSIONS | EFFICIENCY |
|---------|--------------|----------------|--------------|------------|
| 9840106 | 75W | 3.13A | 13.8x6.3x3.2 | 88% |
| 9840107 | 100W | 4.17A | 15.3x6.3x3.2 | 89% |
| 9840108 | 150W | 6.25A | 18.6x6.3x3.2 | 90% |
| 9840109 | 200W | 8.33A | 19.9x6.3x3.7 | 93% |



BASIC PARAMETERS

| | |
|------------------|------------|
| INPUT VOLTAGE | 200-277Vac |
| INPUT FREQUENCY | 50/60 Hz |
| INPUT PF | 0,96 |
| OUTPUT VOLTAGE | 24Vdc |
| PST | <1 |
| SVM | <0,4 |
| IP | 67 |
| DIMMABLE | On/Off |
| NOMINAL LIFETIME | 70.000h |
| WARRANTY | 5 years |



light
the essence
of life

