



1




Turn off the general switch

2




Create a CutOut


3

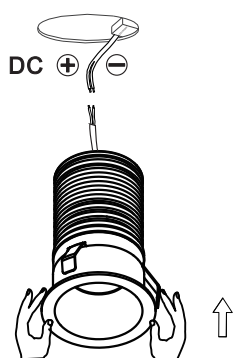

The cable connection has to be waterproof.
Below one ways recommended.
Accessories excluded for standard product.

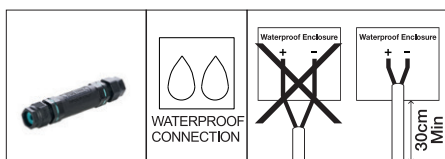

4



Completed installation



- The installation must be done by competent electricians.
- Product can not be modified
- Make sure the power has been switched off before installation
- The product is a Class III luminaire and shall be connected with a current driver according to the specifications in the above sheet
- When connecting more than one fixture, these are connecting in series, from plus to minus
- The connection of the luminaire should be standard with 0.5mm²-1.5mm² conductor.
- The specification for the driver means determines on the voltage and the maximum number of luminaires per loop
- Power should never be regulated on the secondary side
- See the installations on the image

