

NOVA LUCE

Installation Sheet


IMPORTANT INFORMATION

- It is recommended that luminaires are installed and fitted by a qualified electrician ensuring the installation complies to the current IEE wiring regulations.
- These instructions should be read carefully and retained after installation for future reference and maintenance.
- Do not install this product on damp or newly plastered surfaces.
- The LEDs in this fitting are not replaceable.
- Ensure all electrical connections are secure and that there are no loose strands.
- This product is NOT dimmable.

PRODUCT SPECIFICATION

Electrical Classification: Class II
 Voltage: 240V / 50Hz
 Ingress Protection: IP20
 Rated Wattage: 3W
 Colour Temp.: 6000K
 Battery: 3.2V 600mAh LiFePO4

DIMENSIONS

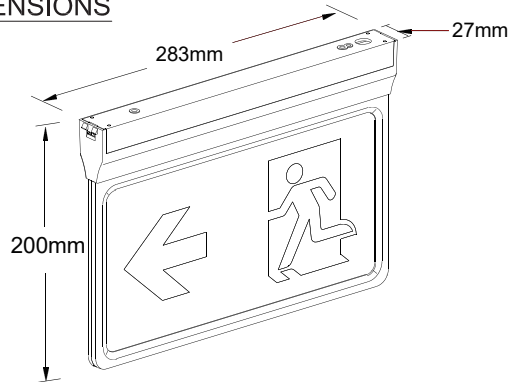


GUARANTEE

This product is guaranteed for a period of 3 years from the date of purchase. The guarantee is invalid in the case of improper use, improper installations or tampering. Should the product fail during the guarantee period it will be replaced free of charge, subject to correct installation and return of the faulty unit. The provider is not responsible for any costs associated with the replacement of this product.

DESCRIPTION: 3W LED Ceiling / Wall Mounted Exit Sign

Model: B230

APPROVALS & CLASSIFICATIONS



ALWAYS SWITCH OFF THE MAINS SUPPLY BEFORE INSTALLATION OR SERVICING

SUGGESTED METHOD OF INSTALLATION

Read Instructions and check you have all the tools and accessories to complete the installation correctly.

STEP 1

Isolate the mains supply before connecting. Unpack the luminaire and check that you have all the tools to install the luminaire safely and in compliance with current electrical standards. Ensure there are no obstructions or services in the way.

STEP 2

Please select appropriate emergency fascia to suit your exit requirements. Remove fascia using small screwdriver.

STEP 3

Remove the cover from the top of the fitting.

STEP 4

Feed the mains cable through the cable entry point in the body of the luminaire.

STEP 5

Position and fix the top cover to a suitable solid surface. (a) Drill holes. (b) Fit Rawl Plugs. (c) Fix into position. Do not install this fitting on newly plastered areas. Fix in 2 pos'ns.

STEP 6

Terminate the mains cable into the terminal block mounted on the PCB ensuring that the correct polarity is observed. Ensure all conductors are fully sleeved and insulated, see FIG.1

STEP 7

Ensure that the battery cells are connected.

STEP 8

Re-secure body of fitting into top cover.

STEP 9

Turn on mains power supply and test luminaire for correct operation.

LEGEND KIT



INCLUDED



NOT INCLUDED



This product may contain substances that can be hazardous to the environment if not disposed of properly. Electrical and electronic equipment should never be disposed of with general household waste but must be separated for its correct treatment and recovery. Where possible recycle your packaging.

Installation instructions

