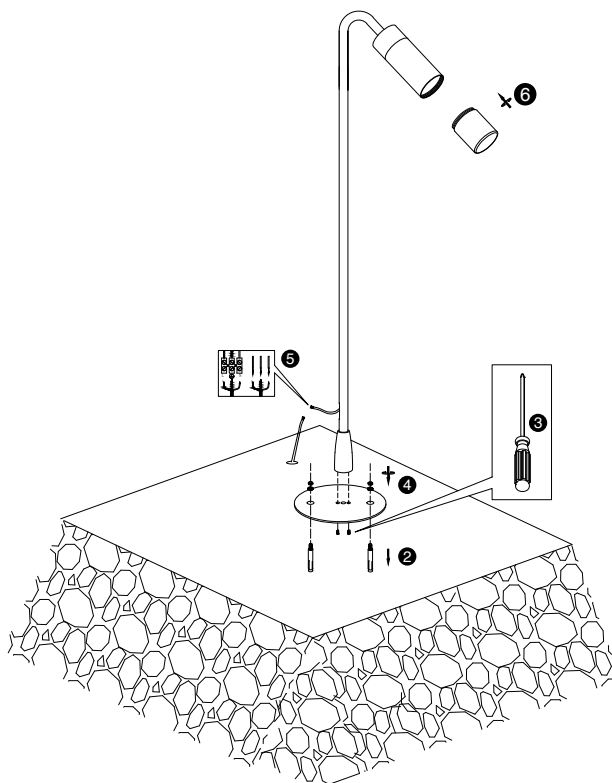



1. Turn off the general switch
2. Drill holes
3. Apply screws with a screw driver
4. Fix it in place
5. Connect the wires
6. By rotating apply the cap
7. Turn on the general switch