






1

Turn off the general switch

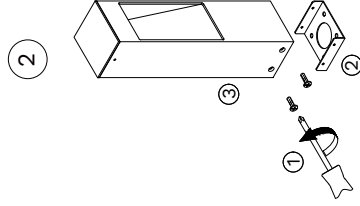


2

Remove the side nuts

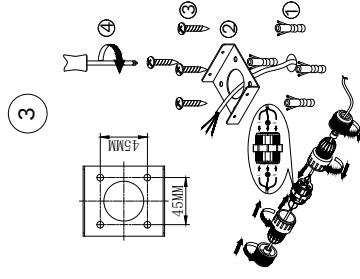


3

Drill holes apply plastic anchors
With screws & connect the wires

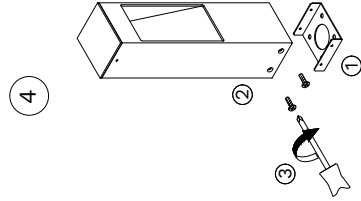

4

Apply the side screws in place



5

Turn on the general switch

