

NOVA LUCE


9041139



Turn off the general switch



Turn on the general switch

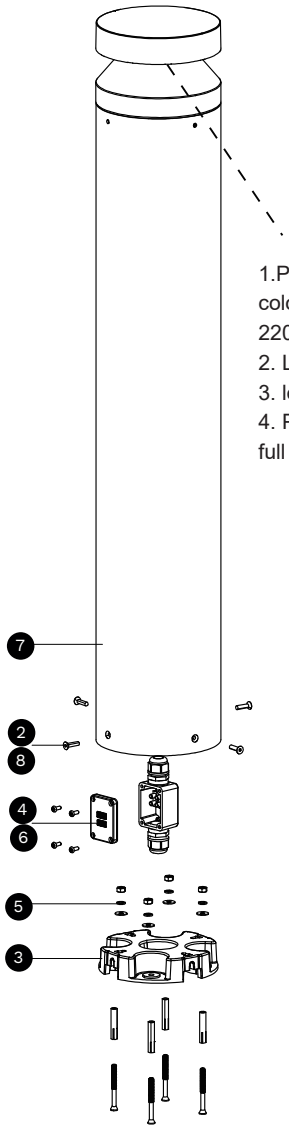

1.Press the switch in order to control the color temperature:
2200K/2700K/3200K/4000K
2. Long press (4s) to lock color
3. long press again (4s) to unlock.
4. Power switching: Controls partial/ full brightness activation.

1. Turn off general switch
2. Remove the screws
3. Remove the plate
4. Remove the terminal box
5. Apply anchors
6. Connect wires
7. Apply the element in to place
8. Apply the screws
9. Turn on the general switch