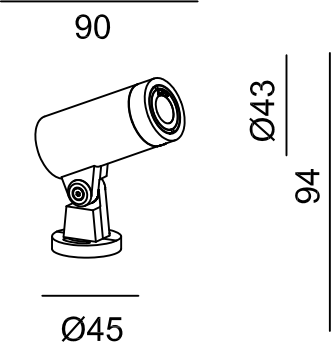


| Dimension                                                                         | Main parts                                                                                                             |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
|  | <br>1 Cover<br>2 Housing<br>3 Support |



unit:mm

Remark:The picture is for reference only,please refer to the actual product.


1.FEATURES

- It is high power in-ground lighting.
- Input voltage: 220V AC. When you install this product,please according to the sticker information to do it.
- Please find a qualified electrician or technician to install this product.
- This product is made by aluminum alloy . The surface finish is only available for natural environmentDon't put it into hostile environment like near the sea or high sault , high sour area.
- It is IP65,do not soak into the water.
- Available environment temperature:-20 ~+40.

2.INSTALLATION

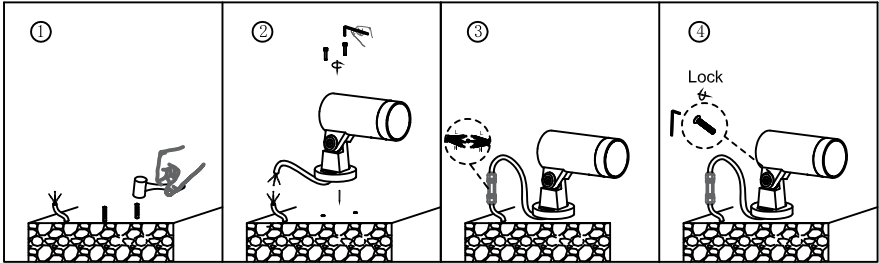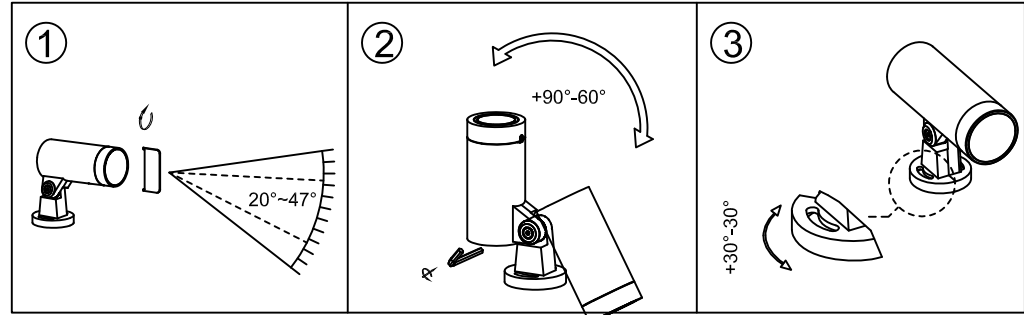

High voltage product:

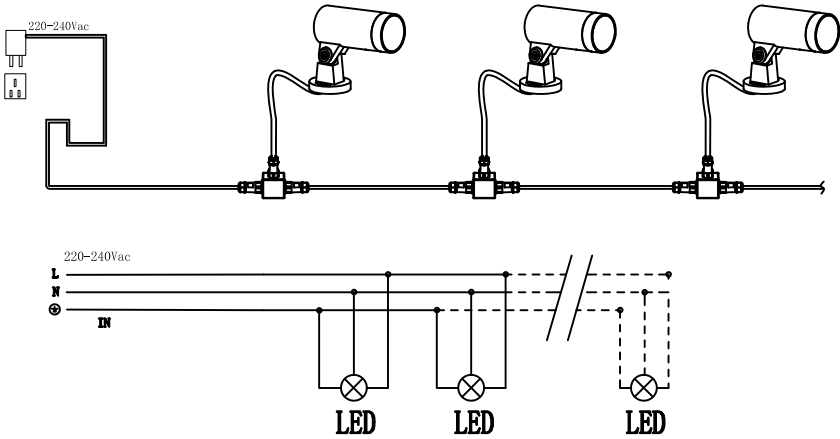

3.WIRING DIAGRAM

- Housing: 12# Alu die-cast,powder coated T=60-80um,according with ISO class 1/ASTM class 4B
- Frame: 12# Alu die-cast
- Glass: 3mm thickness tempered glass
- Power cable: H05RN-F 3X0.75mm²L=2.0m(High voltage)

Available environment temperature: -20℃~40℃

4.SPECIFICAION

| Adjustable Angle(°)                 | Beam angle(°) | Wattage(W) | Operating current(mA) | I <sub>p</sub> Class | IK rate |
|-------------------------------------|---------------|------------|-----------------------|----------------------|---------|
| BASE: +90° -60°<br>HORIZONTAL: ±30° | 20° ~47°      | 4.6        | 250                   | 65                   | 06      |