

Dimension

130

153

Ø76

Ø65

unit:mm

Main parts

1 Cover
2 Housing
3 Support

Remark:The picture is for reference only,please refer to the actual product.

1.FEATURES


- It is high power in-ground lighting.
- Standard of color temperature 2700-3200K.
- Input voltage: 240V AC, When you install this product,please according to the sticker information to do it.
- Please find a qualified electrician or technician to install this product.
- This product is made by aluminum alloy . The surface finish is only available for natural environmentDon't put it into hostile environment like near the sea or high sault , high sour area.
- It is IP65,do not soak into the water.
- Available environment temperature:-20 ~+40.

2.INSTALLATION



1

2

3

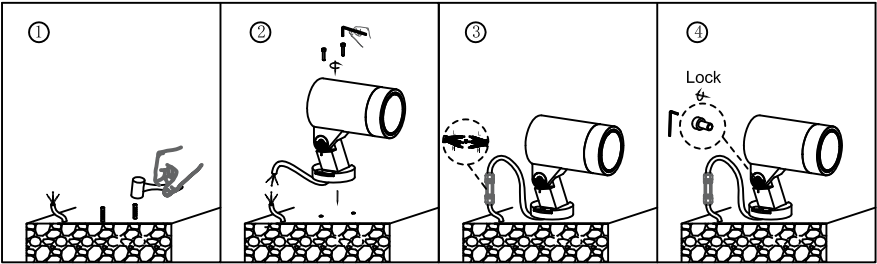

High voltage product:

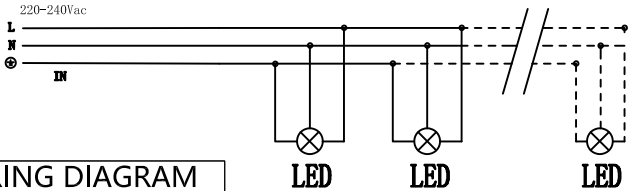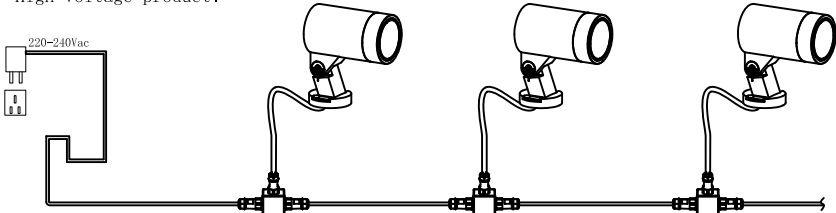

3.WIRING DIAGRAM

- Housing: 12# Alu die-cast,powder coated T=60-80um,according with ISO class 1/ASTM class 4B
- Frame: 12# Alu die-cast
- Glass: 5mm thickness tempered glass
- Power cable: H05RN-F 3X1.0mm²L=2.0m(High voltage)
- Available environment temperature: -20℃~40℃

4.SPECIFICAITION

Adjustable Angle(°)	Luminance(Lm)	Wattage(W)	Operating current(mA)	I _p Class	IK rate
BASE :+90° -40°	3000K CRI80 10291lm	10.4	500	65	07
HORIZONTAL : +-25°	3000K CRI90 10751lm				