


OFF

1




A=3PCS



B=2PCS




C=2PCS



ON

10

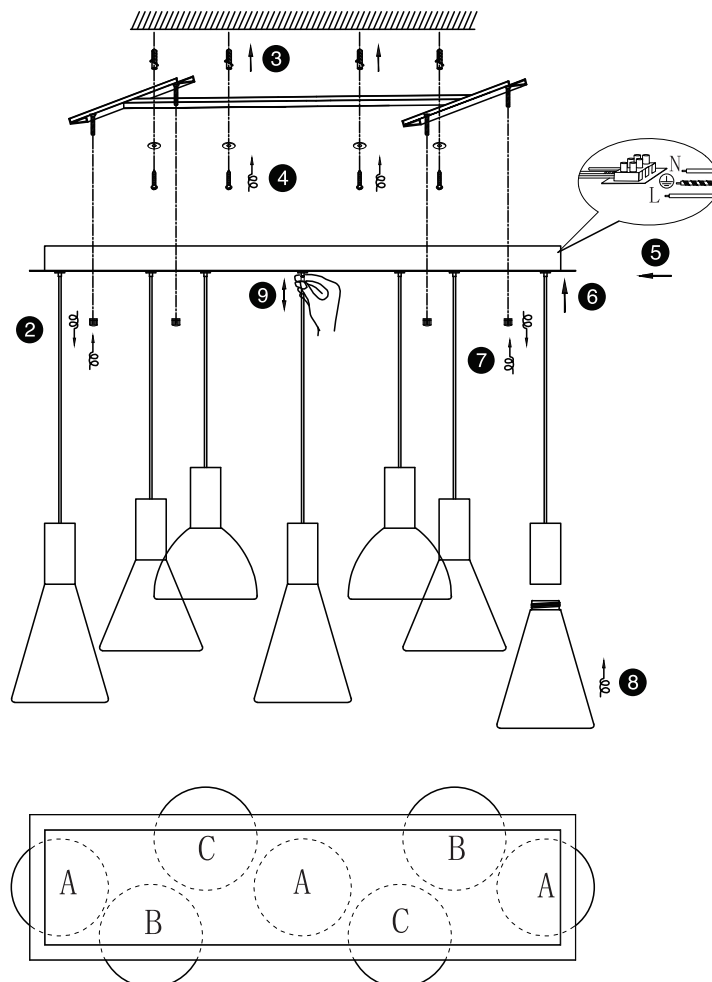

1. Turn off the general switch

2. Take off the caps

3. Drill holes & Apply plastic anchors

4. Apply screws

5. Connect the wires

6. Place the product into place

7. Tie up the cap into place

8. Apply the lid by rotate

9. Adjust the cord on the desirable length

10. Turn on the general switch

