



1

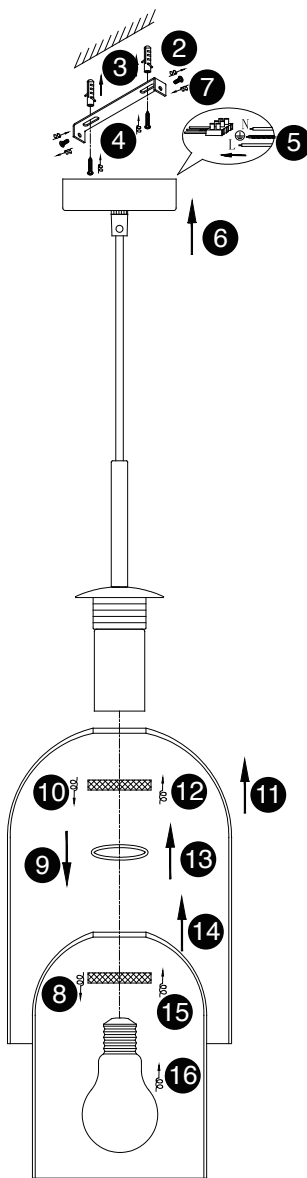

17

1. Turn off the general switch
2. Untight the top caps
3. Drill holes and apply plastic anchors
4. Apply screws
5. Connect wires
6. Put the canopy in place
7. Apply the side csrews
8. Remove the cap holder
9. Remove the ring
10. Remove the cap holder
11. 12. Apply glass & apply the cap
13. Apply the ring
14. 15. Apply glass & apply the cap
16. Apply bulb
17. Turn on the general switch