




1. Turn off the general switch

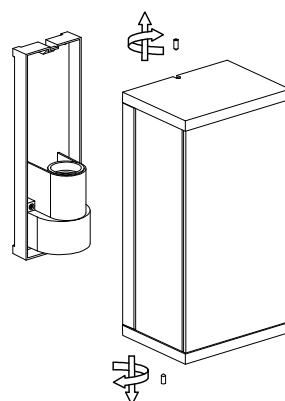


2. Untie side screws to remove the cap

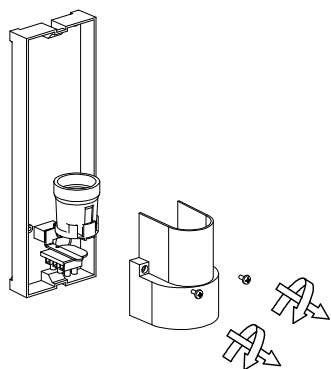


3. Untie screws to remove the rest of the parts

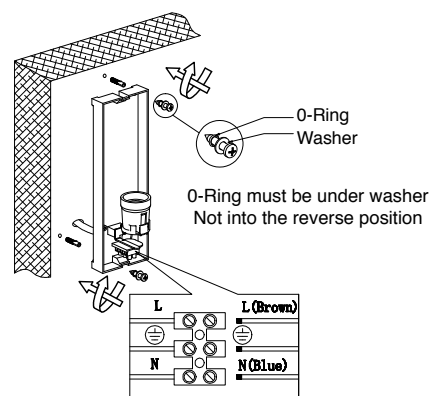


4. Connect wires & make base stable by tiding up the screws

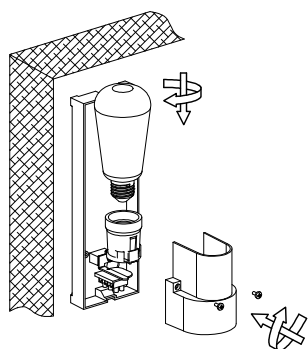

5. Insert the bulb by tiding it in place & apply screws to connect the cap

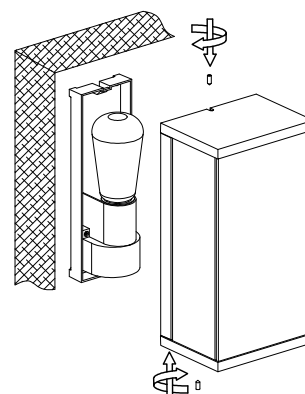

6. Apply the cap by tiding up the side screws



7. Turn on the general switch

