


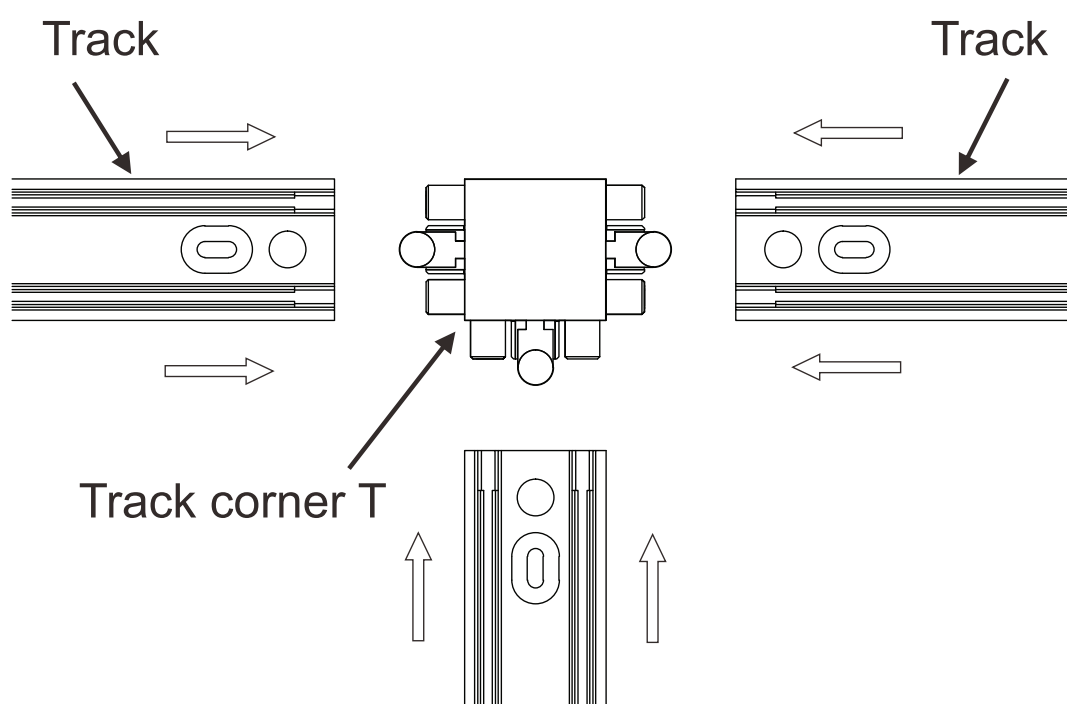

The end cover of the three guide rails to be spliced is pulled out, and the copper tablets of the connecting parts are inserted into the rail on the rail.