


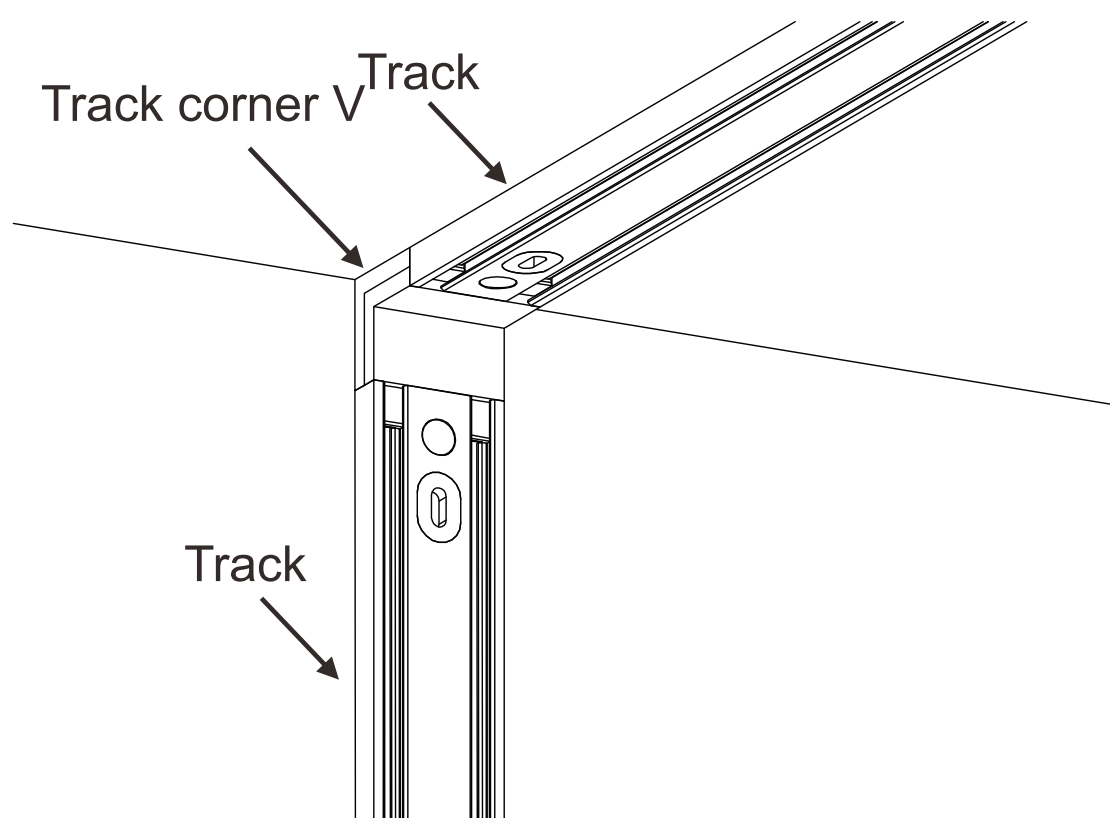

The end cover of the two guide rails to be spliced is pulled out, and the copper tablets of the connecting parts are inserted into the rail of the guide rail.