


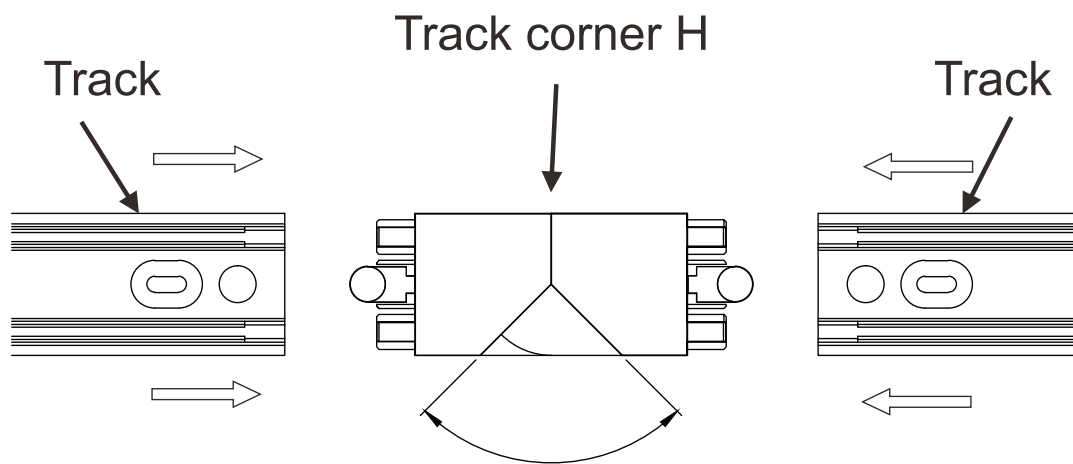

Can rotate 0°-90°

The end cover of the two guide rails to be spliced is pulled out,
and the horizontal corner joint is moved to a suitable angle.