



1




Turn off the general switch

2

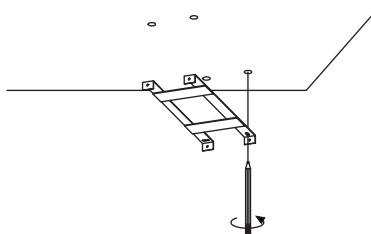


Mark where to drill holes

3

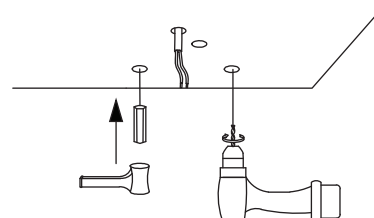


Make holes & apply anchors

4

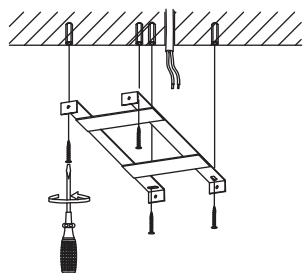


Tie up the screws
to make it stable

5

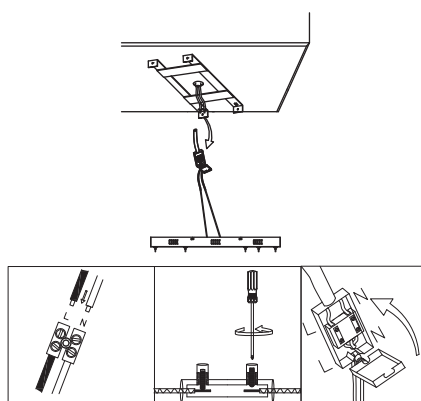


Connect the wires

6

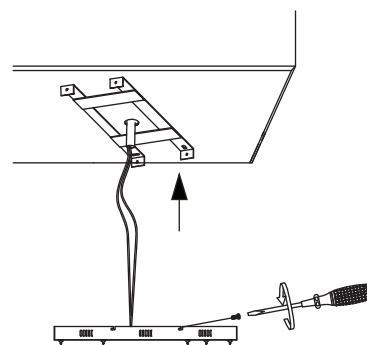


Fix the luminaire into place
by tying up the side screws

7

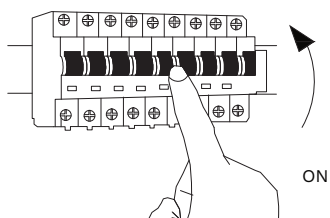


Turn on the general switch

8

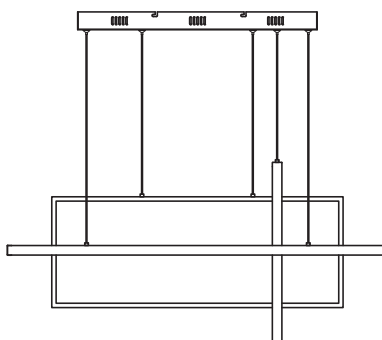

2.4G REMOTE CONTROL INSTRUCTIONS

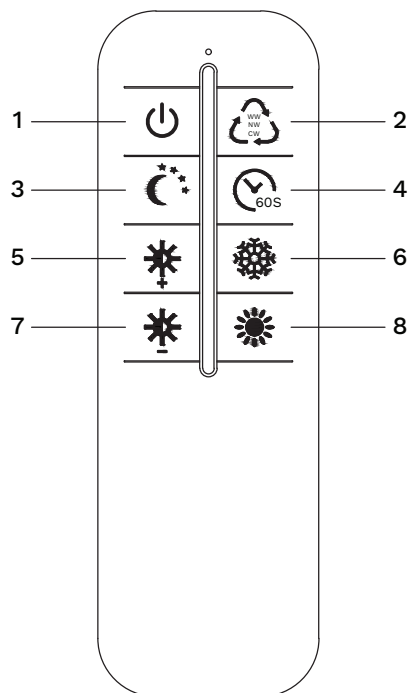

-  ON/OFF Switch: Switch on light, within three seconds and press this button once, if the light flashes three times, the pairing is successful.
-  Color temperature switch: Yellow-Warm White-White.
-  Nightlight mode: 10% brightness of Yellow light.
-  Timing mode: Switches off the light after 60s.
-  Brightness +: When the lamp is on, press and hold this button down to **increase** the brightness.
-  Color temperature changes gradually: Hold down this button, to change the color to White.
-  Brightness -: When the lamp is on, press and hold this button down to **decrease** the brightness.
-  Color temperature changes gradually: Hold down this button, color to Yellow.

