

# NOVA LUCE

## PRODUCT DATASHEET

Version: 001

### PRODUCT PHOTOGRAPH




### GENERAL INFORMATION

|                         |                         |
|-------------------------|-------------------------|
| Product Code            | 9010247                 |
| Product Category        | Low Voltage Tracks      |
| Product Family          | Breda Flexible Magnetic |
| Mounting Location       | Ceiling                 |
| Application Environment | Indoor                  |

### DIMENSION & WEIGHT

|              |                        |
|--------------|------------------------|
| LxWxH (cm)   | L: 24,5 W: 2,2 H: 14,5 |
| Cut out (cm) | 0                      |
| Weight (Kgr) | 0.81                   |

### TECHNICAL DRAWING

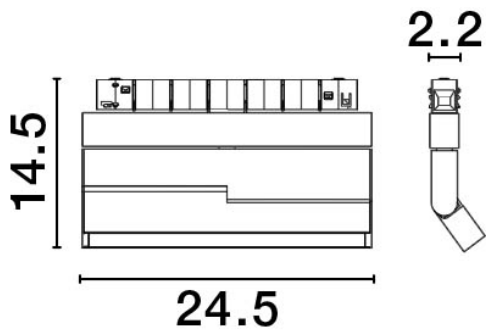

### MATERIAL & COLOR

|                |           |
|----------------|-----------|
| Product Color  | Black     |
| Body Material  | Aluminium |
| Cover Material | N/A       |

### APPLICATION & MOUNTING

|                            |         |
|----------------------------|---------|
| Ambient Working Temp.      | 45 C    |
| Type of Protection         | IP20    |
| Protection Class IK        | IK04    |
| Dimmable                   | No      |
| Type of Dimming (Optional) | N/A     |
| Mounting type              | Track   |
| Mounting Depth (cm)        | Ceiling |
| Led Module Replaceable     | No      |
| Light Source               | LED     |
| Adjustable                 | Yes     |

### COMPATIBLE WITH

- On/Off Driver: N/A
- Triac Driver: N/A
- Dali Driver: N/A

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com



# NOVA LUCE

## PRODUCT DATASHEET

Version: 001

### ELECTRICAL DATA

|                         |         |
|-------------------------|---------|
| Power (Nominal)         | 15 W    |
| Input voltage (Nominal) | 48Vdc   |
| Mains Frequency         | 50/60Hz |
| Output voltage          | N/A     |
| Output Current          | N/A     |
| Power Factor            | N/A     |
| Efficiency              | N/A     |
| SVM                     | N/A     |
| Pst                     | N/A     |
| Class                   | III     |

### PHOTOMETRICAL DATA

|                           |            |
|---------------------------|------------|
| Luminous Flux             | 434 lm     |
| Luminous Efficacy         | 28,93 lm/W |
| Color Temperature         | 3000 K     |
| Light Color (Designation) | Warm White |
| CRI                       | >90        |
| SDCM                      | <3         |
| Beam Angle                | 120        |
| UGR                       | N/A        |

### LIFESPAN

|          |             |
|----------|-------------|
| Lifetime | 50000 hours |
|----------|-------------|


### CERTIFICATES

|              |          |
|--------------|----------|
| Certificates | CE, UKCA |
|--------------|----------|

### WARRANTY

|          |         |
|----------|---------|
| Warranty | 5 years |
|----------|---------|

### LIGHT DISTRIBUTION

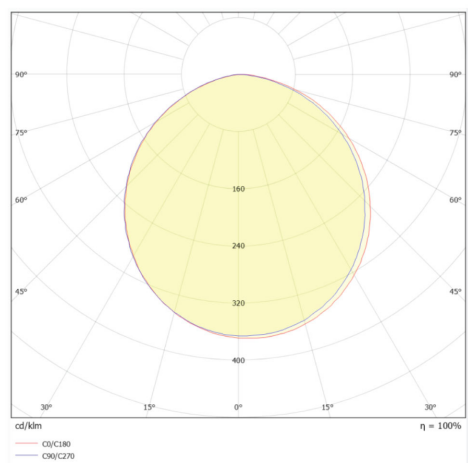

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com

