


PRODUCT PHOTOGRAPH



TECHNICAL DRAWING

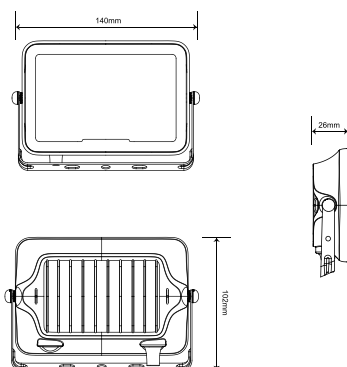

COMPATIBLE WITH

- On/Off Driver: Included
- Triac Driver: N/A
- Dali Driver: N/A

GENERAL INFORMATION

Product Code	9050808
Product Category	Floodlights
Product Family	Grotto
Mounting Location	Ground/Wall
Application Environment	Outdoor

DIMENSION & WEIGHT

LxWxH (cm)	L: 14 W: 2.6 H: 10.2
Cut out (cm)	-
Weight (Kgr)	0.24

MATERIAL & COLOR

Product Color	Black
Body Material	Aluminium
Cover Material	N/A

APPLICATION & MOUNTING

Ambient Working Temp.	Max 40 oC
Type of Protection	IP66
Protection Class IK	IK06
Dimmable	N/A
Type of Dimming (Optional)	N/A
Mounting type	Surface
Mounting Depth (cm)	N/A
Led Module Replaceable	No
Light Source	Led



NOVA LUCE

PRODUCT DATASHEET

Version: 001

ELECTRICAL DATA

Power (Nominal)	20W
Input voltage (Nominal)	220-240Vac
Mains Frequency	50/60Hz
Output voltage	N/A
Output Current	N/A
Power Factor	0.9
Efficiency	N/A
SVM	N/A
Pst	N/A
Class	I

PHOTOMETRICAL DATA

Luminus Flux	2100lm
Luminous Efficacy	105lm/w
Color Temperature	4000K
Light Color (Designation)	Neutral White
CRI	>80
Step MacAdam	<6
Beam Angle	120°
UGR	N/A

LIFESPAN

Lifetime	30000h
----------	--------

CERTIFICATES

Certificates	CE
--------------	----

WARRANTY

Warranty	5 years
----------	---------

LIGHT DISTRIBUTION

NOVA LUCE S.A

Schimatari Viotias
32009, Greece

+30 22620 58 121
+30 22620 56 743

info@novaluce.com
www.novaluce.com

