

# NOVA LUCE


## PRODUCT DATASHEET

Version: 001

### PRODUCT PHOTOGRAPH



### TECHNICAL DRAWING

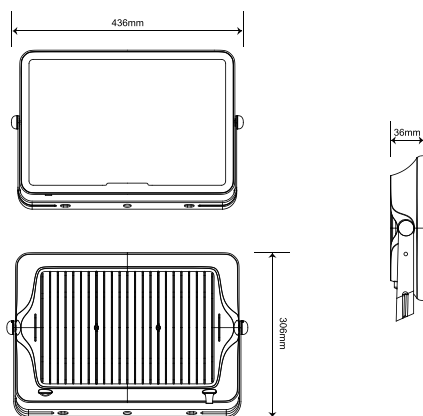

### COMPATIBLE WITH

- On/Off Driver: Included
- Triac Driver: N/A
- Dali Driver: N/A

### GENERAL INFORMATION

|                         |             |
|-------------------------|-------------|
| Product Code            | 9050819     |
| Product Category        | Floodlights |
| Product Family          | Grotto      |
| Mounting Location       | Ground/Wall |
| Application Environment | Outdoor     |

### DIMENSION & WEIGHT

|              |                       |
|--------------|-----------------------|
| LxWxH (cm)   | L:43.6 W: 3.6 H: 30.6 |
| Cut out (cm) | -                     |
| Weight (Kgr) | 2.5                   |

### MATERIAL & COLOR

|                |           |
|----------------|-----------|
| Product Color  | Black     |
| Body Material  | Aluminium |
| Cover Material | N/A       |

### APPLICATION & MOUNTING

|                            |           |
|----------------------------|-----------|
| Ambient Working Temp.      | Max 40 oC |
| Type of Protection         | IP66      |
| Protection Class IK        | IK06      |
| Dimmable                   | N/A       |
| Type of Dimming (Optional) | N/A       |
| Mounting type              | Surface   |
| Mounting Depth (cm)        | N/A       |
| Led Module Replaceable     | No        |
| Light Source               | Led       |

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com



# NOVA LUCE

## PRODUCT DATASHEET

Version: 001

### ELECTRICAL DATA

|                         |                   |
|-------------------------|-------------------|
| Power (Nominal)         | <b>200W</b>       |
| Input voltage (Nominal) | <b>220-240Vac</b> |
| Mains Frequency         | <b>50/60Hz</b>    |
| Output voltage          | <b>N/A</b>        |
| Output Current          | <b>N/A</b>        |
| Power Factor            | <b>0.9</b>        |
| Efficiency              | <b>N/A</b>        |
| SVM                     | <b>N/A</b>        |
| Pst                     | <b>N/A</b>        |
| Class                   | <b>I</b>          |

### PHOTOMETRICAL DATA

|                           |                   |
|---------------------------|-------------------|
| Luminus Flux              | <b>20100lm</b>    |
| Luminous Efficacy         | <b>100lm/w</b>    |
| Color Temperature         | <b>6500K</b>      |
| Light Color (Designation) | <b>Cool White</b> |
| CRI                       | <b>&gt;80</b>     |
| Step MacAdam              | <b>&lt;6</b>      |
| Beam Angle                | <b>120°</b>       |
| UGR                       | <b>N/A</b>        |

### LIFESPAN

|          |               |
|----------|---------------|
| Lifetime | <b>30000h</b> |
|----------|---------------|

### CERTIFICATES

|              |           |
|--------------|-----------|
| Certificates | <b>CE</b> |
|--------------|-----------|

### WARRANTY

|          |                |
|----------|----------------|
| Warranty | <b>5 years</b> |
|----------|----------------|

### LIGHT DISTRIBUTION

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com

