

# NOVA LUCE


## PRODUCT DATASHEET

Version: 001

### PRODUCT PHOTOGRAPH



### TECHNICAL DRAWING

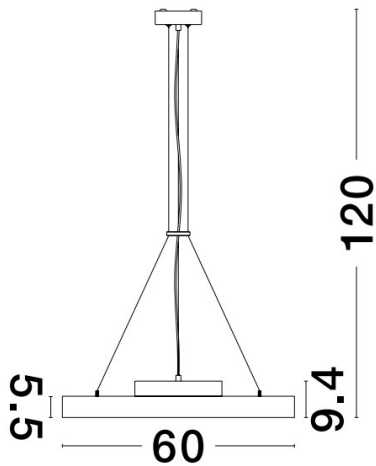

### COMPATIBLE WITH

— On/Off Driver: N/A

— Triac Driver: N/A

— Dali Driver: N/A

### GENERAL INFORMATION

|                         |                  |
|-------------------------|------------------|
| Product Code            | 9058122          |
| Product Category        | Ceiling          |
| Product Family          | Perfect Profiles |
| Mounting Location       | Ceiling          |
| Application Environment | Indoor           |

### DIMENSION & WEIGHT

|              |                  |
|--------------|------------------|
| LxWxH (cm)   | D: 60 H: 5,5-120 |
| Cut out (cm) | 0                |
| Weight (Kgr) | 5.2              |

### MATERIAL & COLOR

|                |           |
|----------------|-----------|
| Product Color  | Black     |
| Body Material  | Aluminium |
| Cover Material | PMMA      |

### APPLICATION & MOUNTING

|                            |                         |
|----------------------------|-------------------------|
| Ambient Working Temp.      | 45 C                    |
| Type of Protection         | IP20                    |
| Protection Class IK        | IK03                    |
| Dimmable                   | YES                     |
| Type of Dimming (Optional) | Dimming with Controller |
| Mounting type              | Suspended               |
| Mounting Depth (cm)        | Ceiling                 |
| Led Module Replaceable     | No                      |
| Light Source               | LED                     |
| Adjustable                 | Yes                     |

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com



# NOVA LUCE

## PRODUCT DATASHEET

Version: 001

### ELECTRICAL DATA

|                         |                   |
|-------------------------|-------------------|
| Power (Nominal)         | <b>40 W</b>       |
| Input voltage (Nominal) | <b>220-240Vac</b> |
| Mains Frequency         | <b>50/60Hz</b>    |
| Output voltage          | <b>N/A</b>        |
| Output Current          | <b>N/A</b>        |
| Power Factor            | <b>N/A</b>        |
| Efficiency              | <b>N/A</b>        |
| SVM                     | <b>N/A</b>        |
| Pst                     | <b>N/A</b>        |
| Class                   | <b>I</b>          |

### PHOTOMETRICAL DATA

|                           |                    |
|---------------------------|--------------------|
| Luminous Flux             | <b>3185 lm</b>     |
| Luminous Efficacy         | <b>79,63 lm/W</b>  |
| Color Temperature         | <b>2700-6000 K</b> |
| Light Color (Designation) | <b>WW - CW</b>     |
| CRI                       | <b>&gt;80</b>      |
| SDCM                      | <b>&lt;6</b>       |
| Beam Angle                | <b>120</b>         |
| UGR                       | <b>N/A</b>         |

### LIFESPAN

|          |                    |
|----------|--------------------|
| Lifetime | <b>50000 hours</b> |
|----------|--------------------|


### CERTIFICATES

|              |                 |
|--------------|-----------------|
| Certificates | <b>CE, UKCA</b> |
|--------------|-----------------|

### WARRANTY

|          |                |
|----------|----------------|
| Warranty | <b>5 years</b> |
|----------|----------------|

### LIGHT DISTRIBUTION

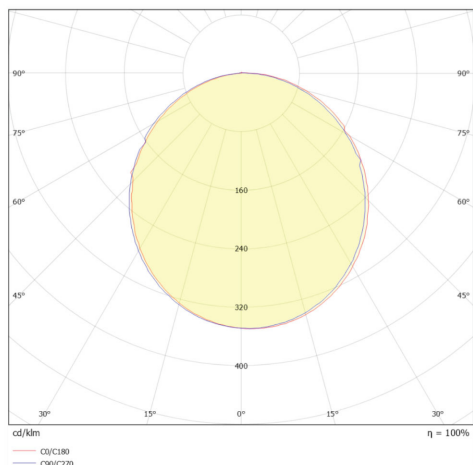

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com

