

NOVA LUCE


PRODUCT DATASHEET

Version: 001

PRODUCT PHOTOGRAPH



TECHNICAL DRAWING

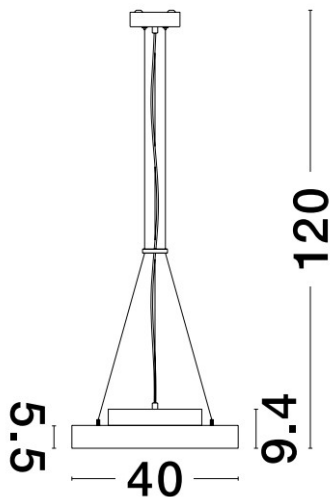

COMPATIBLE WITH

— On/Off Driver: N/A

— Triac Driver: N/A

— Dali Driver: N/A

GENERAL INFORMATION

Product Code	9060100
Product Category	Ceiling
Product Family	Perfect Profiles
Mounting Location	Ceiling
Application Environment	Indoor

DIMENSION & WEIGHT

LxWxH (cm)	D: 40 H: 5,5-120
Cut out (cm)	0
Weight (Kgr)	3.1

MATERIAL & COLOR

Product Color	White
Body Material	Aluminium
Cover Material	PMMA

APPLICATION & MOUNTING

Ambient Working Temp.	45 C
Type of Protection	IP20
Protection Class IK	IK03
Dimmable	YES
Type of Dimming (Optional)	Triac
Mounting type	Suspended
Mounting Depth (cm)	Ceiling
Led Module Replaceable	No
Light Source	LED
Adjustable	Yes

NOVA LUCE S.A

Schimatari Viotias
32009, Greece

+30 22620 58 121
+30 22620 56 743

info@novaluce.com
www.novaluce.com



NOVA LUCE

PRODUCT DATASHEET

Version: 001

ELECTRICAL DATA

Power (Nominal)	24 W
Input voltage (Nominal)	220-240Vac
Mains Frequency	50/60Hz
Output voltage	N/A
Output Current	N/A
Power Factor	N/A
Efficiency	N/A
SVM	N/A
Pst	N/A
Class	I

PHOTOMETRICAL DATA

Luminus Flux	1920 lm
Luminous Efficacy	80 lm/W
Color Temperature	3000 K
Light Color (Designation)	Warm White
CRI	>80
SDCM	<6
Beam Angle	120
UGR	N/A

LIFESPAN

Lifetime	50000 hours
----------	--------------------


CERTIFICATES

Certificates	CE, UKCA
--------------	-----------------

WARRANTY

Warranty	5 years
----------	----------------

LIGHT DISTRIBUTION

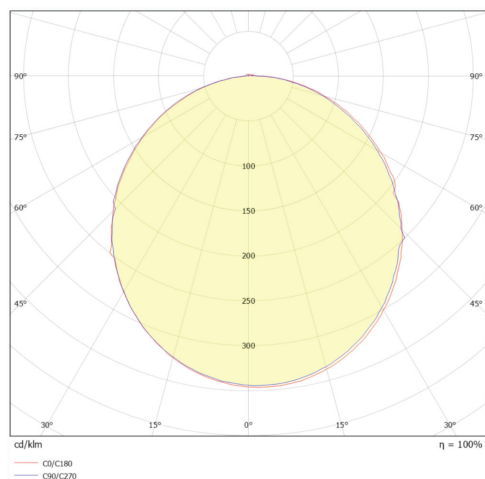

NOVA LUCE S.A

Schimatari Viotias
32009, Greece

+30 22620 58 121
+30 22620 56 743

info@novaluce.com
www.novaluce.com

