

# NOVA LUCE

## PRODUCT DATASHEET

Version: 001

### PRODUCT PHOTOGRAPH




### GENERAL INFORMATION

|                         |                          |
|-------------------------|--------------------------|
| Product Code            | 9063611                  |
| Product Category        | Linear                   |
| Product Family          | Linear Lighting Profiles |
| Mounting Location       | Ceiling                  |
| Application Environment | Indoor                   |

### DIMENSION & WEIGHT

|              |                      |
|--------------|----------------------|
| LxWxH (cm)   | L: 152 W: 3,5 H: 120 |
| Cut out (cm) | 0                    |
| Weight (Kgr) | 5                    |

### TECHNICAL DRAWING

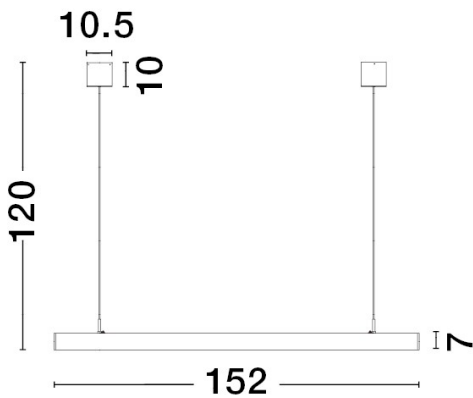

### MATERIAL & COLOR

|                |           |
|----------------|-----------|
| Product Color  | Black     |
| Body Material  | Aluminium |
| Cover Material | N/A       |

### APPLICATION & MOUNTING

|                            |               |
|----------------------------|---------------|
| Ambient Working Temp.      | 45 C          |
| Type of Protection         | IP20          |
| Protection Class IK        | IK04          |
| Dimmable                   | YES           |
| Type of Dimming (Optional) | Motion Sensor |
| Mounting type              | Suspended     |
| Mounting Depth (cm)        | Ceiling       |
| Led Module Replaceable     | No            |
| Light Source               | LED           |
| Adjustable                 | No            |

### COMPATIBLE WITH

— On/Off Driver: N/A

— Triac Driver: N/A

— Dali Driver: N/A

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com



# NOVA LUCE

## PRODUCT DATASHEET

Version: 001

### ELECTRICAL DATA

|                         |            |
|-------------------------|------------|
| Power (Nominal)         | 25 W       |
| Input voltage (Nominal) | 220-240Vac |
| Mains Frequency         | 50/60Hz    |
| Output voltage          | N/A        |
| Output Current          | N/A        |
| Power Factor            | N/A        |
| Efficiency              | N/A        |
| SVM                     | N/A        |
| Pst                     | N/A        |
| Class                   | I          |

### PHOTOMETRICAL DATA

|                           |            |
|---------------------------|------------|
| Luminus Flux              | 1625 lm    |
| Luminous Efficacy         | 65 lm/W    |
| Color Temperature         | 3000 K     |
| Light Color (Designation) | Warm White |
| CRI                       | >90        |
| SDCM                      | <6         |
| Beam Angle                | 30         |
| UGR                       | <8         |

### LIFESPAN

|          |             |
|----------|-------------|
| Lifetime | 50000 hours |
|----------|-------------|


### CERTIFICATES

|              |          |
|--------------|----------|
| Certificates | CE, UKCA |
|--------------|----------|

### WARRANTY

|          |         |
|----------|---------|
| Warranty | 5 years |
|----------|---------|

### LIGHT DISTRIBUTION

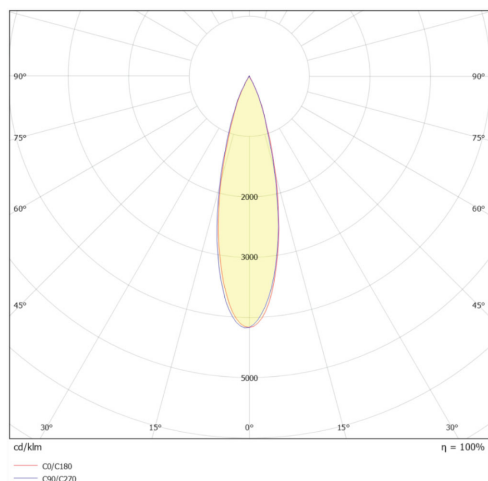

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com

