

# NOVA LUCE


## PRODUCT DATASHEET

Version: 001

### PRODUCT PHOTOGRAPH



### TECHNICAL DRAWING

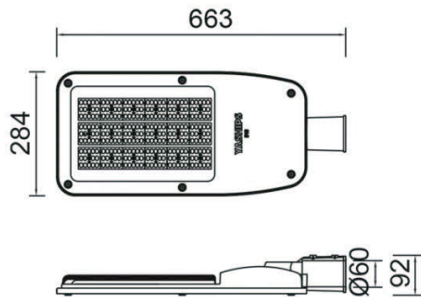

### COMPATIBLE WITH

- On/Off Driver: Included
- Triac Driver: -
- Dali Driver: -

### GENERAL INFORMATION

|                         |             |
|-------------------------|-------------|
| Product Code            | 9090754-150 |
| Product Category        | Streetlight |
| Product Family          | Zeva        |
| Mounting Location       | Column      |
| Application Environment | Outdoor     |

### DIMENSION & WEIGHT

|              |                     |
|--------------|---------------------|
| LxWxH (cm)   | L 66.3 W 28.4 H 9.2 |
| Cut out (cm) | -                   |
| Weight (Kgr) | 4.2                 |

### MATERIAL & COLOR

|                |                       |
|----------------|-----------------------|
| Product Color  | Drak Grey             |
| Body Material  | Aluminium             |
| Specifications | 10KV SURGE PROTECTION |

### APPLICATION & MOUNTING

|                            |                  |
|----------------------------|------------------|
| Ambient Working Temp.      | (-25) ~ (+40) oC |
| Type of Protection         | IP66             |
| Protection Class IK        | IK08             |
| Dimmable                   | No               |
| Type of Dimming (Optional) | N/A              |
| Mounting type              | N/A              |
| Mounting Depth (cm)        | N/A              |
| Led Module Replaceable     | No               |
| Light Source               | Led              |

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com



# NOVA LUCE

## PRODUCT DATASHEET

Version: 001

### ELECTRICAL DATA

|                         |                   |
|-------------------------|-------------------|
| Power (Nominal)         | <b>150W</b>       |
| Input voltage (Nominal) | <b>100-240Vac</b> |
| Mains Frequency         | <b>50/60Hz</b>    |
| Output voltage          | <b>N/A</b>        |
| Output Current          | <b>N/A</b>        |
| Power Factor            | <b>0.9</b>        |
| Efficiency              | <b>&gt;0.85</b>   |
| SVM                     | <b>0.4</b>        |
| Pst                     | <b>0.9</b>        |
| Class                   | <b>I</b>          |

### PHOTOMETRICAL DATA

|                                      |                      |
|--------------------------------------|----------------------|
| Luminous Flux                        | <b>21000lm</b>       |
| Luminous Efficacy (Complete Product) | <b>140lm/W</b>       |
| Luminous Efficacy (LED Source)       | <b>-</b>             |
| Color Temperature                    | <b>4000K</b>         |
| Light Color (Designation)            | <b>Neutral White</b> |
| CRI                                  | <b>&gt;70</b>        |
| SDCM                                 | <b>&lt;3</b>         |
| Beam Angle                           | <b>Type II/III</b>   |
| UGR                                  | <b>-</b>             |

### LIFESPAN

|          |              |
|----------|--------------|
| Lifetime | <b>50000</b> |
|----------|--------------|

### CERTIFICATES

|              |                 |
|--------------|-----------------|
| Certificates | <b>CE, UCKA</b> |
|--------------|-----------------|

### WARRANTY

|          |                |
|----------|----------------|
| Warranty | <b>5 years</b> |
|----------|----------------|

