

# NOVA LUCE


## PRODUCT DATASHEET

Version: 001

### PRODUCT PHOTOGRAPH



### TECHNICAL DRAWING

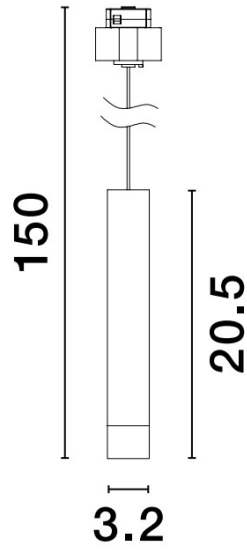

### COMPATIBLE WITH

- On/Off Driver: N/A
- Triac Driver: N/A
- Dali Driver: N/A

### GENERAL INFORMATION

|                         |                    |
|-------------------------|--------------------|
| Product Code            | 9136163            |
| Product Category        | Low Voltage Tracks |
| Product Family          | Buxton Magnetic    |
| Mounting Location       | N/A                |
| Application Environment | Indoor             |

### DIMENSION & WEIGHT

|              |               |
|--------------|---------------|
| LxWxH (cm)   | D: 3,2 H: 150 |
| Cut out (cm) | 0             |
| Weight (Kgr) | 0.53          |

### MATERIAL & COLOR

|                |              |
|----------------|--------------|
| Product Color  | Brass & Gold |
| Body Material  | Aluminium    |
| Cover Material | N/A          |

### APPLICATION & MOUNTING

|                            |       |
|----------------------------|-------|
| Ambient Working Temp.      | 45 C  |
| Type of Protection         | IP20  |
| Protection Class IK        | IK03  |
| Dimmable                   | YES   |
| Type of Dimming (Optional) | Triac |
| Mounting type              | N/A   |
| Mounting Depth (cm)        | N/A   |
| Led Module Replaceable     | No    |
| Light Source               | LED   |
| Adjustable                 | No    |

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com



# NOVA LUCE

## PRODUCT DATASHEET

Version: 001

### ELECTRICAL DATA

|                         |         |
|-------------------------|---------|
| Power (Nominal)         | 12 W    |
| Input voltage (Nominal) | 48Vdc   |
| Mains Frequency         | 50/60Hz |
| Output voltage          | N/A     |
| Output Current          | N/A     |
| Power Factor            | N/A     |
| Efficiency              | N/A     |
| SVM                     | N/A     |
| Pst                     | N/A     |
| Class                   | III     |

### PHOTOMETRICAL DATA

|                           |            |
|---------------------------|------------|
| Luminous Flux             | 1185 lm    |
| Luminous Efficacy         | 98,75 lm/W |
| Color Temperature         | 3000 K     |
| Light Color (Designation) | Warm White |
| CRI                       | >90        |
| SDCM                      | <3         |
| Beam Angle                | 45         |
| UGR                       | <19        |

### LIFESPAN

|          |             |
|----------|-------------|
| Lifetime | 50000 hours |
|----------|-------------|


### CERTIFICATES

|              |          |
|--------------|----------|
| Certificates | CE, UKCA |
|--------------|----------|

### WARRANTY

|          |         |
|----------|---------|
| Warranty | 5 years |
|----------|---------|

### LIGHT DISTRIBUTION

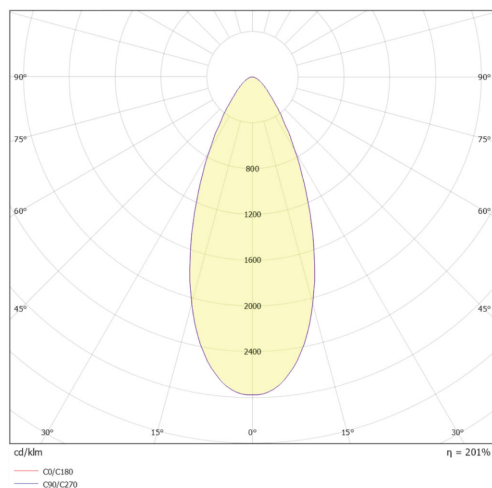

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com

