

NOVA LUCE


PRODUCT DATASHEET

Version: 001

PRODUCT PHOTOGRAPH



TECHNICAL DRAWING



COMPATIBLE WITH

— On/Off Driver: Included

— Triac Driver: 9621523 / 9844010

— Dali Driver: 9844008

GENERAL INFORMATION

Product Code	9232114
Product Category	Downlights
Product Family	Bree
Mounting Location	Ceiling
Application Environment	Indoor

DIMENSION & WEIGHT

LxWxH (cm)	L: 5,6 W: 5,6 H: 7,5
Cut out (cm)	5x5
Weight (Kgr)	0.186

MATERIAL & COLOR

Product Color	Black
Body Material	Aluminium
Cover Material	N/A

APPLICATION & MOUNTING

Ambient Working Temp.	45 C
Type of Protection	IP20
Protection Class IK	IK03
Dimmable	Yes
Type of Dimming (Optional)	Triac/Dali
Mounting type	Recessed
Mounting Depth (cm)	Ceiling
Led Module Replaceable	No
Light Source	LED
Adjustable	No

NOVA LUCE S.A

Schimatari Viotias
32009, Greece

+30 22620 58 121
+30 22620 56 743

info@novaluce.com
www.novaluce.com



NOVA LUCE

PRODUCT DATASHEET

Version: 001

ELECTRICAL DATA

Power (Nominal)	7 W
Input voltage (Nominal)	220-240Vac
Mains Frequency	50/60Hz
Output voltage	37Vdc
Output Current	200mA
Power Factor	0.9
Efficiency	>73%
SVM	<0.4
Pst	<1
Class	II

PHOTOMETRICAL DATA

Luminous Flux	528 lm
Luminous Efficacy	75,43 lm/W
Color Temperature	3000 K
Light Color (Designation)	Warm White
CRI	>90
SDCM	<3
Beam Angle	24
UGR	<12

LIFESPAN

Lifetime	50000 hours
----------	--------------------


CERTIFICATES

Certificates	CE, UKCA
--------------	-----------------

WARRANTY

Warranty	5 years
----------	----------------

LIGHT DISTRIBUTION

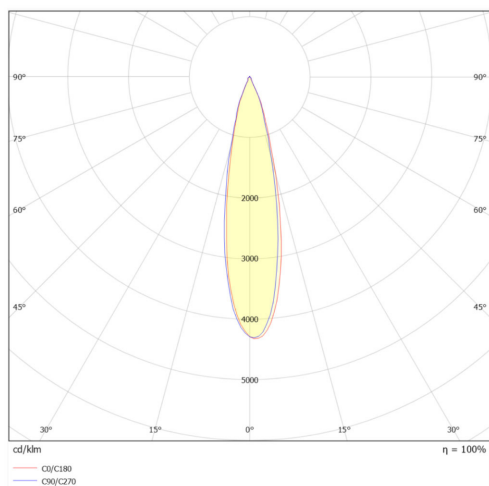

NOVA LUCE S.A

Schimatari Viotias
32009, Greece

+30 22620 58 121
+30 22620 56 743

info@novaluce.com
www.novaluce.com

