



PRODUCT PHOTOGRAPH

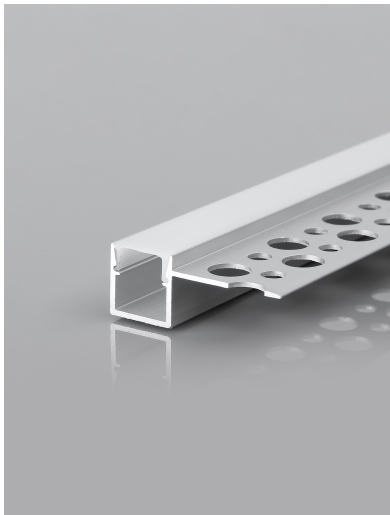

TECHNICAL DRAWING



COMPATIBLE WITH

- On/Off Driver: N/A
- Triac Driver: N/A
- Dali Driver: N/A

GENERAL INFORMATION

Product Code	9254109
Product Category	Aluminium Profiles
Product Family	Trimless
Mounting Location	N/A
Application Environment	N/A

DIMENSION & WEIGHT

LxWxH (cm)	200 W:3.53 H:1.37 cm
Cut out (cm)	N/A
Weight (Kgr)	N/A

MATERIAL & COLOR

Product Color	N/A
Body Material	Aluminium
Cover Material	N/A

APPLICATION & MOUNTING

Ambient Working Temp.	45 C
Type of Protection	N/A
Protection Class IK	N/A
Dimmable	N/A
Type of Dimming (Optional)	N/A
Mounting type	N/A
Mounting Depth (cm)	N/A
Led Module Replaceable	No
Light Source	Led
Adjustable	No



NOVA LUCE

PRODUCT DATASHEET

Version: 001

ELECTRICAL DATA

Power (Nominal)	N/A
Input voltage (Nominal)	N/A
Mains Frequency	50/60Hz
Output voltage	N/A
Output Current	N/A
Power Factor	N/A
Efficiency	N/A
SVM	N/A
Pst	N/A
Class	N/A

PHOTOMETRICAL DATA

Luminus Flux	N/A
Luminous Efficacy	N/A
Color Temperature	N/A
Light Color (Designation)	N/A
CRI	N/A
SDCM	<3
Beam Angle	N/A
UGR	N/A

LIFESPAN

Lifetime	N/A
----------	-----

CERTIFICATES

Certificates	CE, UKCA
--------------	----------

WARRANTY

Warranty	N/A
----------	-----

LIGHT DISTRIBUTION

NOVA LUCE S.A

Schimatari Viotias
32009, Greece

+30 22620 58 121
+30 22620 56 743

info@novaluce.com
www.novaluce.com

