

# NOVA LUCE

## PRODUCT DATASHEET

Version: 001

### PRODUCT PHOTOGRAPH



### GENERAL INFORMATION

|                         |                          |
|-------------------------|--------------------------|
| Product Code            | 9492816                  |
| Product Category        | Systems                  |
| Product Family          | Imagine Lighting Systems |
| Mounting Location       | Ceiling                  |
| Application Environment | Indoor                   |

### DIMENSION & WEIGHT

|              |                         |
|--------------|-------------------------|
| LxWxH (cm)   | .. 108,3 W: 2,1 H: 14,5 |
| Cut out (cm) | 0                       |
| Weight (Kgr) | -                       |

### TECHNICAL DRAWING

### MATERIAL & COLOR

|                |           |
|----------------|-----------|
| Product Color  | Black     |
| Body Material  | Aluminium |
| Cover Material | N/A       |

### APPLICATION & MOUNTING

|                            |         |
|----------------------------|---------|
| Ambient Working Temp.      | 45 C    |
| Type of Protection         | IP20    |
| Protection Class IK        | IK03    |
| Dimmable                   | NO      |
| Type of Dimming (Optional) | N/A     |
| Mounting type              | Surface |
| Mounting Depth (cm)        | Ceiling |
| Led Module Replaceable     | No      |
| Light Source               | LED     |
| Adjustable                 | Yes     |

### COMPATIBLE WITH

— On/Off Driver: N/A

— Triac Driver: N/A

— Dali Driver: N/A

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com



# NOVA LUCE

## PRODUCT DATASHEET

Version: 001

### ELECTRICAL DATA

|                         |                |
|-------------------------|----------------|
| Power (Nominal)         | <b>24 W</b>    |
| Input voltage (Nominal) | <b>48Vdc</b>   |
| Mains Frequency         | <b>50/60Hz</b> |
| Output voltage          | <b>N/A</b>     |
| Output Current          | <b>N/A</b>     |
| Power Factor            | <b>N/A</b>     |
| Efficiency              | <b>N/A</b>     |
| SVM                     | <b>N/A</b>     |
| Pst                     | <b>N/A</b>     |
| Class                   | <b>III</b>     |

### PHOTOMETRICAL DATA

|                           |                   |
|---------------------------|-------------------|
| Luminous Flux             | <b>2090 lm</b>    |
| Luminous Efficacy         | <b>87,08 lm/W</b> |
| Color Temperature         | <b>3000 K</b>     |
| Light Color (Designation) | <b>Warm White</b> |
| CRI                       | <b>&gt;90</b>     |
| SDCM                      | <b>&lt;6</b>      |
| Beam Angle                | <b>24</b>         |
| UGR                       | <b>N/A</b>        |

### LIFESPAN

|          |                    |
|----------|--------------------|
| Lifetime | <b>50000 hours</b> |
|----------|--------------------|


### CERTIFICATES

|              |                 |
|--------------|-----------------|
| Certificates | <b>CE, UKCA</b> |
|--------------|-----------------|

### WARRANTY

|          |                |
|----------|----------------|
| Warranty | <b>5 years</b> |
|----------|----------------|

### LIGHT DISTRIBUTION

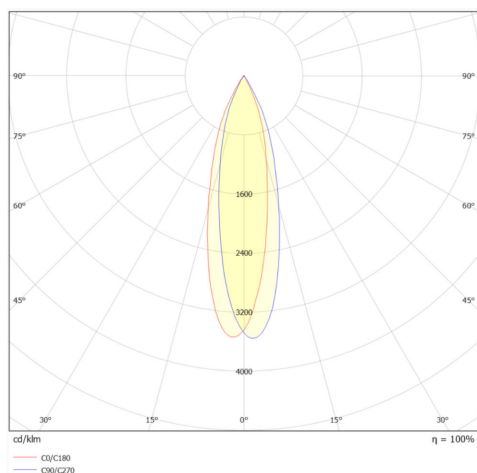

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com

