


### PRODUCT PHOTOGRAPH



### TECHNICAL DRAWING

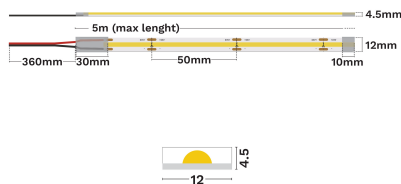

### COMPATIBLE WITH

— On/Off Driver: N/A

— Triac Driver: N/A

— Dali Driver: N/A

### GENERAL INFORMATION

|                         |            |
|-------------------------|------------|
| Product Code            | 9540073    |
| Product Category        | Led Strips |
| Product Family          | Vida       |
| Mounting Location       | N/A        |
| Application Environment | Outdoor    |

### DIMENSION & WEIGHT

|              |            |
|--------------|------------|
| LxWxH (cm)   | L:5m 12 mm |
| Cut out (cm) | N/A        |
| Weight (Kgr) | N/A        |

### MATERIAL & COLOR

|                |           |
|----------------|-----------|
| Product Color  | N/A       |
| Body Material  | Aluminium |
| Cover Material | N/A       |

### APPLICATION & MOUNTING

|                            |            |
|----------------------------|------------|
| Ambient Working Temp.      | 45 C       |
| Type of Protection         | IP68       |
| Protection Class IK        | N/A        |
| Dimmable                   | Yes        |
| Type of Dimming (Optional) | Triac/Dali |
| Mounting type              | N/A        |
| Mounting Depth (cm)        | N/A        |
| Led Module Replaceable     | No         |
| Light Source               | Led        |
| Adjustable                 | No         |



# NOVA LUCE

## PRODUCT DATASHEET

Version: 001

### ELECTRICAL DATA

|                         |         |
|-------------------------|---------|
| Power (Nominal)         | 12      |
| Input voltage (Nominal) | 24Vdc   |
| Mains Frequency         | 50/60Hz |
| Output voltage          | N/A     |
| Output Current          | N/A     |
| Power Factor            | N/A     |
| Efficiency              | N/A     |
| SVM                     | N/A     |
| Pst                     | N/A     |
| Class                   | III     |

### PHOTOMETRICAL DATA

|                           |            |
|---------------------------|------------|
| Luminus Flux              | 1065       |
| Luminous Efficacy         | 89         |
| Color Temperature         | 3000       |
| Light Color (Designation) | Warm White |
| CRI                       | 91         |
| SDCM                      | <3         |
| Beam Angle                | 120        |
| UGR                       | N/A        |

### LIFESPAN

|          |        |
|----------|--------|
| Lifetime | >54000 |
|----------|--------|

### CERTIFICATES

|              |          |
|--------------|----------|
| Certificates | CE, UKCA |
|--------------|----------|

### WARRANTY

|          |         |
|----------|---------|
| Warranty | 5 years |
|----------|---------|

### LIGHT DISTRIBUTION

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com

