

NOVA LUCE


PRODUCT DATASHEET

Version: 001

PRODUCT PHOTOGRAPH



TECHNICAL DRAWING

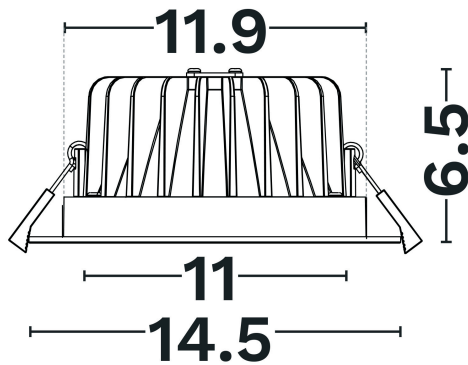

COMPATIBLE WITH

- On/Off Driver: included
- Triac Driver: 9844002/9540319
- Dali Driver: 9621523

GENERAL INFORMATION

Product Code	9540306
Product Category	Downlights
Product Family	Spark
Mounting Location	Ceiling
Application Environment	Technical

DIMENSION & WEIGHT

LxWxH (cm)	D 14.5 H 6.5
Cut out (cm)	16.5
Weight (Kgr)	-

MATERIAL & COLOR

Product Color	White
Body Material	Aluminium
Cover Material	N/A

APPLICATION & MOUNTING

Ambient Working Temp.	Max 40 oC
Type of Protection	IP54
Protection Class IK	IK04
Dimmable	No
Type of Dimming (Optional)	N/A
Mounting type	Recessed
Mounting Depth (cm)	6.1
Led Module Replaceable	No
Light Source	Led

NOVA LUCE S.A

Schimatari Viotias
32009, Greece

+30 22620 58 121
+30 22620 56 743

info@novaluce.com
www.novaluce.com



NOVA LUCE

PRODUCT DATASHEET

Version: 001

ELECTRICAL DATA

Power (Nominal)	18W
Input voltage (Nominal)	220-240Vac
Mains Frequency	50/60Hz
Output voltage	40Vdc
Output Current	450mA
Power Factor	0.9
Efficiency	≥88%
SVM	<0.4
Pst	<1
Class	II

PHOTOMETRICAL DATA

Luminus Flux	2003lm
Luminous Efficacy	111.2lm/W
Color Temperature	4000K
Light Color (Designation)	Neutral White
CRI	>80
SDCM	<3
Beam Angle	60°
UGR	<19

LIFESPAN

Lifetime	50000
----------	-------

CERTIFICATES

Certificates	CE, UCKA
--------------	----------

WARRANTY

Warranty	5 years
----------	---------

LIGHT DISTRIBUTION

NOVA LUCE S.A

Schimatari Viotias
32009, Greece

+30 22620 58 121
+30 22620 56 743

info@novaluce.com
www.novaluce.com

