

# NOVA LUCE


## PRODUCT DATASHEET

Version: 001

### PRODUCT PHOTOGRAPH



### TECHNICAL DRAWING



### COMPATIBLE WITH

— On/Off Driver: Included

— Triac Driver: 9621523 / 9844010

— Dali Driver: 9844008

### GENERAL INFORMATION

|                         |            |
|-------------------------|------------|
| Product Code            | 9844013    |
| Product Category        | Downlights |
| Product Family          | Petit      |
| Mounting Location       | Ceiling    |
| Application Environment | Indoor     |

### DIMENSION & WEIGHT

|              |               |
|--------------|---------------|
| LxWxH (cm)   | D: 6,2 H: 6,1 |
| Cut out (cm) | 5.5           |
| Weight (Kgr) | 0.1777        |

### MATERIAL & COLOR

|                |           |
|----------------|-----------|
| Product Color  | White     |
| Body Material  | Aluminium |
| Cover Material | N/A       |

### APPLICATION & MOUNTING

|                            |            |
|----------------------------|------------|
| Ambient Working Temp.      | 45 C       |
| Type of Protection         | IP42       |
| Protection Class IK        | IK03       |
| Dimmable                   | NO         |
| Type of Dimming (Optional) | Triac/Dali |
| Mounting type              | Recessed   |
| Mounting Depth (cm)        | Ceiling    |
| Led Module Replaceable     | No         |
| Light Source               | LED        |
| Adjustable                 | No         |

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com



# NOVA LUCE

## PRODUCT DATASHEET

Version: 001

### ELECTRICAL DATA

|                         |            |
|-------------------------|------------|
| Power (Nominal)         | 9 W        |
| Input voltage (Nominal) | 220-240Vac |
| Mains Frequency         | 50/60Hz    |
| Output voltage          | 40Vdc      |
| Output Current          | 200mA      |
| Power Factor            | 0.9        |
| Efficiency              | >73%       |
| SVM                     | <0.4       |
| Pst                     | <1         |
| Class                   | II         |

### PHOTOMETRICAL DATA

|                           |            |
|---------------------------|------------|
| Luminous Flux             | 338 lm     |
| Luminous Efficacy         | 37,56 lm/W |
| Color Temperature         | 3000 K     |
| Light Color (Designation) | Warm White |
| CRI                       | >90        |
| SDCM                      | <3         |
| Beam Angle                | 24         |
| UGR                       | <16        |

### LIFESPAN

|          |             |
|----------|-------------|
| Lifetime | 50000 hours |
|----------|-------------|


### CERTIFICATES

|              |          |
|--------------|----------|
| Certificates | CE, UKCA |
|--------------|----------|

### WARRANTY

|          |         |
|----------|---------|
| Warranty | 5 years |
|----------|---------|

### LIGHT DISTRIBUTION

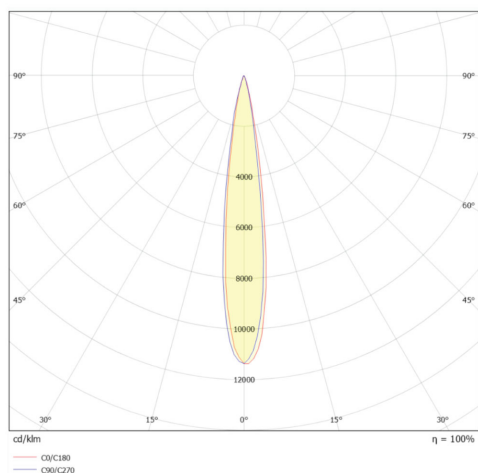

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com

