

# NOVA LUCE


## PRODUCT DATASHEET

Version: 001

### PRODUCT PHOTOGRAPH



### TECHNICAL DRAWING

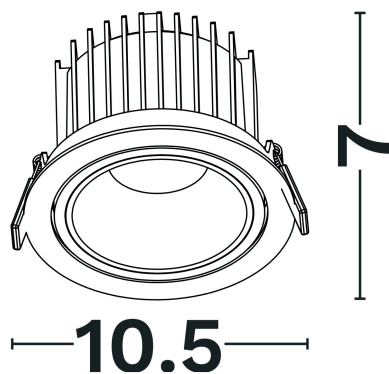

### COMPATIBLE WITH

- On/Off Driver: included
- Triac Driver: 9844002
- Dali Driver: 9621523

### GENERAL INFORMATION

|                         |            |
|-------------------------|------------|
| Product Code            | 9844033    |
| Product Category        | Downlights |
| Product Family          | Vulcan     |
| Mounting Location       | Ceiling    |
| Application Environment | Indoor     |

### DIMENSION & WEIGHT

|              |              |
|--------------|--------------|
| LxWxH (cm)   | D: 10.5 H: 7 |
| Cut out (cm) | 9.5          |
| Weight (Kgr) | -            |

### MATERIAL & COLOR

|                |             |
|----------------|-------------|
| Product Color  | Sandy White |
| Body Material  | Aluminium   |
| Cover Material | N/A         |

### APPLICATION & MOUNTING

|                            |           |
|----------------------------|-----------|
| Ambient Working Temp.      | Max 40 oC |
| Type of Protection         | IP20      |
| Protection Class IK        | IK03      |
| Dimmable                   | No        |
| Type of Dimming (Optional) | N/A       |
| Mounting type              | Recessed  |
| Mounting Depth (cm)        | 9.5       |
| Led Module Replaceable     | No        |
| Light Source               | Led       |

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com



# NOVA LUCE

## PRODUCT DATASHEET

Version: 001

### ELECTRICAL DATA

|                         |            |
|-------------------------|------------|
| Power (Nominal)         | 20W        |
| Input voltage (Nominal) | 220-240Vac |
| Mains Frequency         | 50/60Hz    |
| Output voltage          | N/A        |
| Output Current          | N/A        |
| Power Factor            | 0.9        |
| Efficiency              | 0.83       |
| SVM                     | <0.4       |
| Pst                     | <1         |
| Class                   | II         |

### PHOTOMETRICAL DATA

|                           |            |
|---------------------------|------------|
| Luminus Flux              | 1286lm     |
| Luminous Efficacy         | 64.3lm/W   |
| Color Temperature         | 3000K      |
| Light Color (Designation) | Warm White |
| CRI                       | 90         |
| SDCM                      | <4         |
| Beam Angle                | 36°        |
| UGR                       | <19        |

### LIFESPAN

|          |       |
|----------|-------|
| Lifetime | 50000 |
|----------|-------|

### CERTIFICATES

|              |          |
|--------------|----------|
| Certificates | CE, UCKA |
|--------------|----------|

### WARRANTY

|          |         |
|----------|---------|
| Warranty | 5 years |
|----------|---------|

### LIGHT DISTRIBUTION

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com

