

NOVA LUCE

Linear Lights
2026




LINEAR

With production now based in Greece, our linear lighting collection becomes more flexible, more responsive, and more closely aligned with the needs of each project.

Designed for architectural, commercial, and residential applications, the range offers a clean and consistent design language across different dimensions, lengths, finishes, and color temperature options. From standard solutions to made-to-measure configurations, each luminaire can be adapted to the space, the lighting concept, and the technical requirements of the installation.


This new approach allows us to provide linear lighting with greater freedom in specification, while maintaining the quality, precision, and reliability required for modern lighting projects.

A complete Range of Linear Dimensions

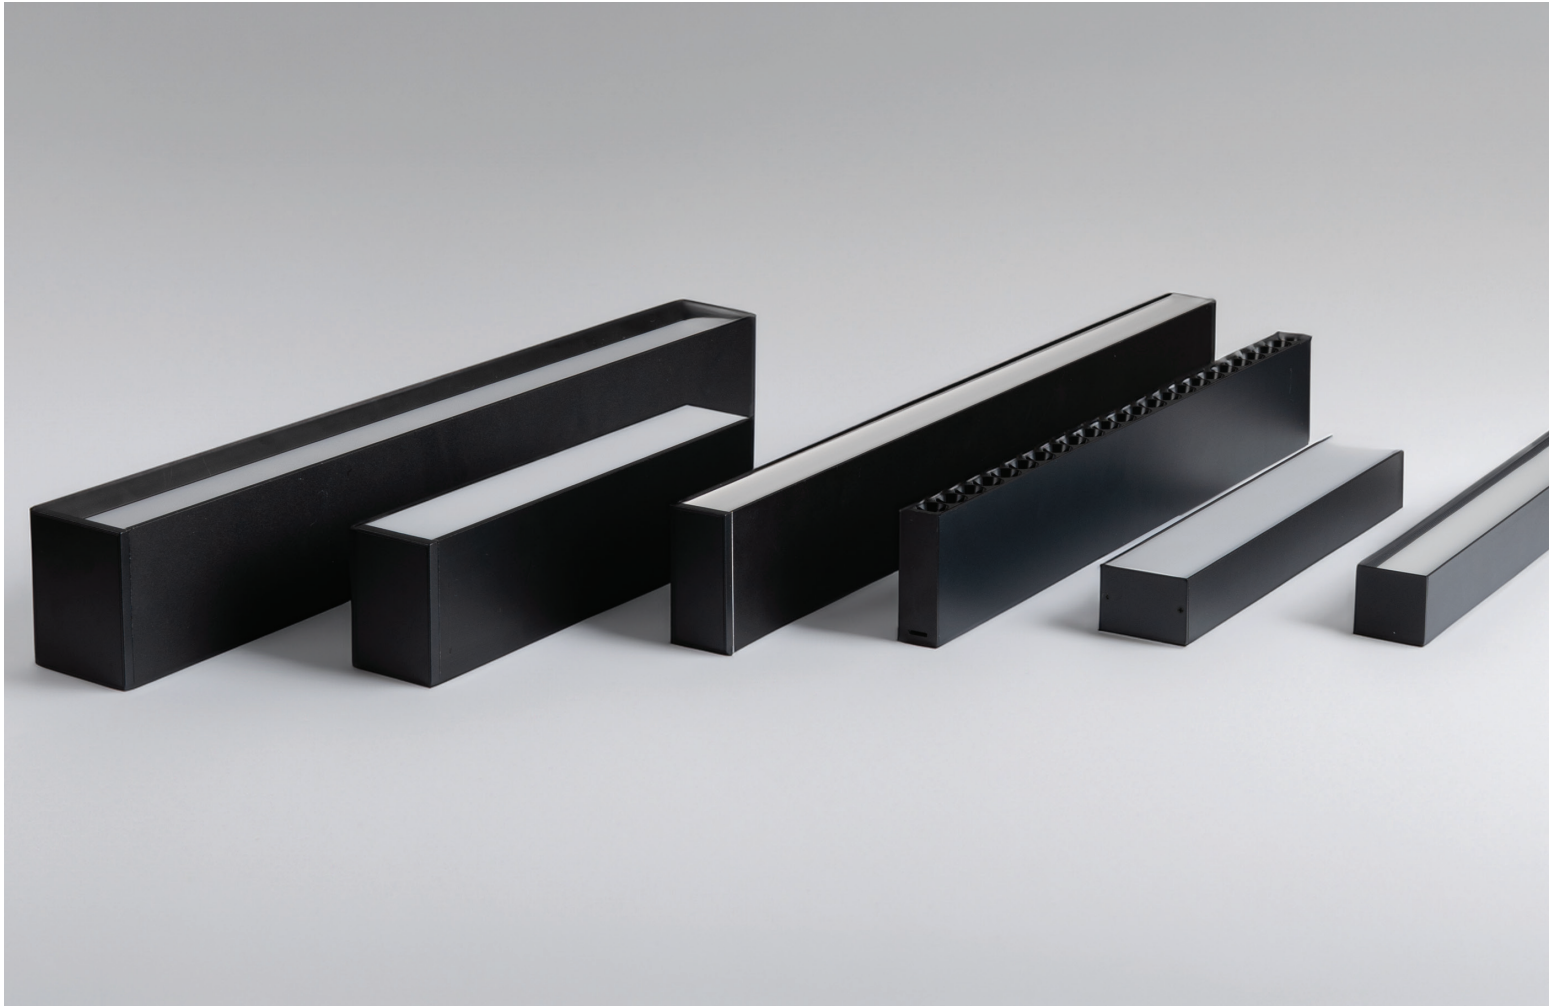


Different sizes Same design Language

The collection has been developed to cover a wide range of applications through different linear profiles, sizes, and proportions. From slim and discreet versions to wider, more decorative solutions, as well as deeper profiles for architectural and technical lighting needs, each option is designed to respond to a specific type of project. This variety allows us to offer a complete linear lighting solution, combining design flexibility, functional performance, and a consistent visual identity across every application.

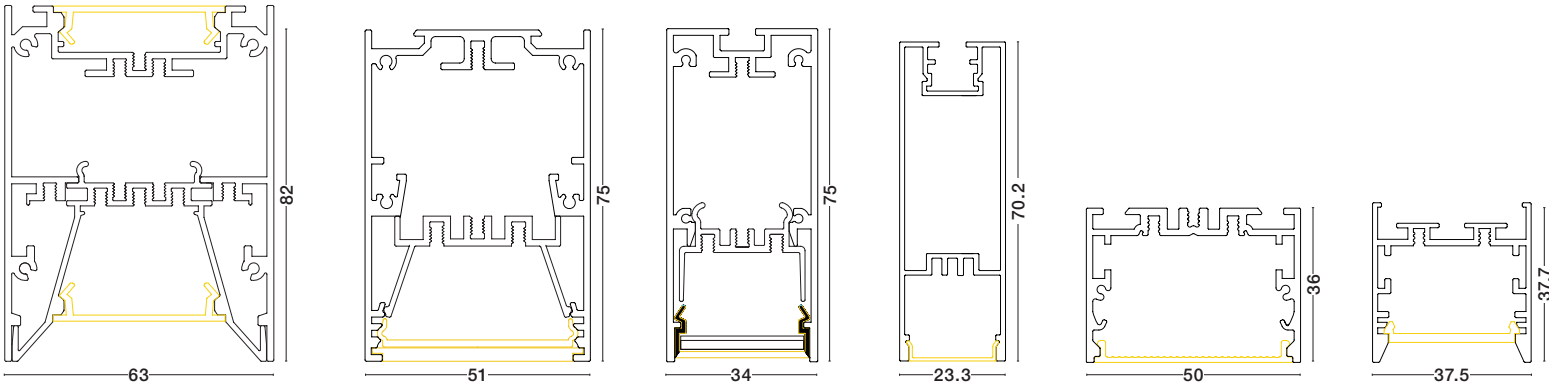


Flexible Mounting Solutions

The range is available in multiple mounting options to suit different architectural and technical requirements. Ceiling-mounted, recessed, trimless, and suspended versions allow each luminaire to be integrated naturally into the space, while different canopy options provide additional flexibility for suspended installations.

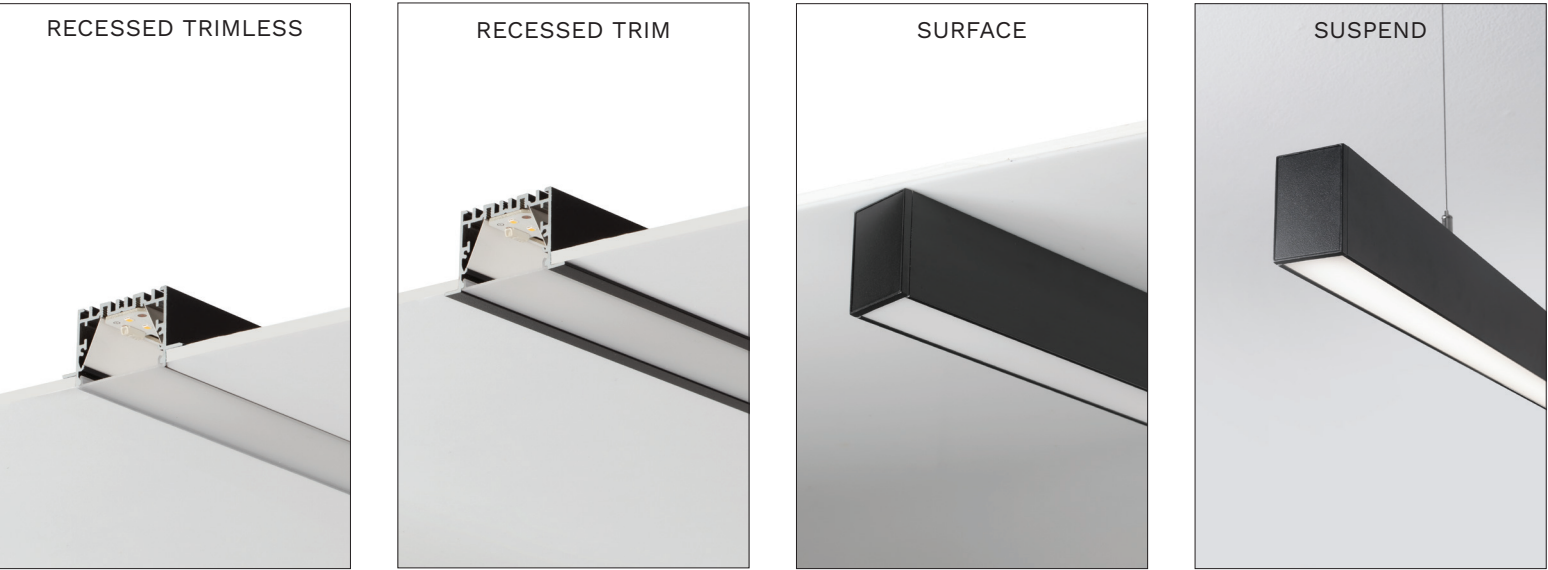

Extended Lenglets, Clean Results

The linear range can be produced in custom lengths of up to 5 metres in one continuous piece, allowing longer installations with fewer joints and a cleaner final result. This gives each project greater freedom in design, while maintaining a uniform appearance and continuous light output across the full length of the luminaire.

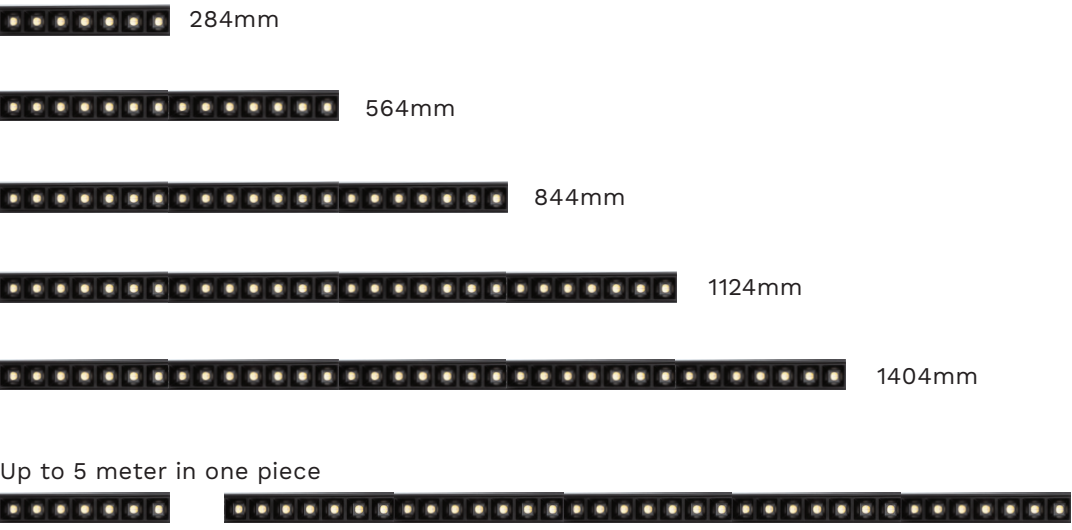

Custom Colors and Finishes

Beyond the classic black and white options, the range can be customised in any RAL color and a variety of finishes to match the design identity of each project. This flexibility allows the luminaires to blend discreetly into the architecture or become a distinctive design element, depending on the required aesthetic.




Color Options for inner trims and Reflectors

The range also offers a variety of color options for inner trims and reflectors, allowing each luminaire to be adapted not only to the exterior finish, but also to the desired lighting effect and visual detail. This added level of customisation helps create either a discreet, uniform appearance or a more distinctive contrast within the fixture.



Advanced Optical Solutions

The range is available with different optical solutions to support a wide variety of applications and lighting requirements. Opal diffusers with different transmittance levels and Dark Frosted versions provide soft, homogeneous illumination, while Micro Prismatic optics combine high efficiency with improved visual comfort. For projects requiring enhanced glare control, Dark Performance UGR<16 and Dark Grid UGR<14 options help reduce glare and create a more comfortable lighting environment. High-performance PMMA extruded lenses in 48° and 11° are also available for general or grazing lighting applications.

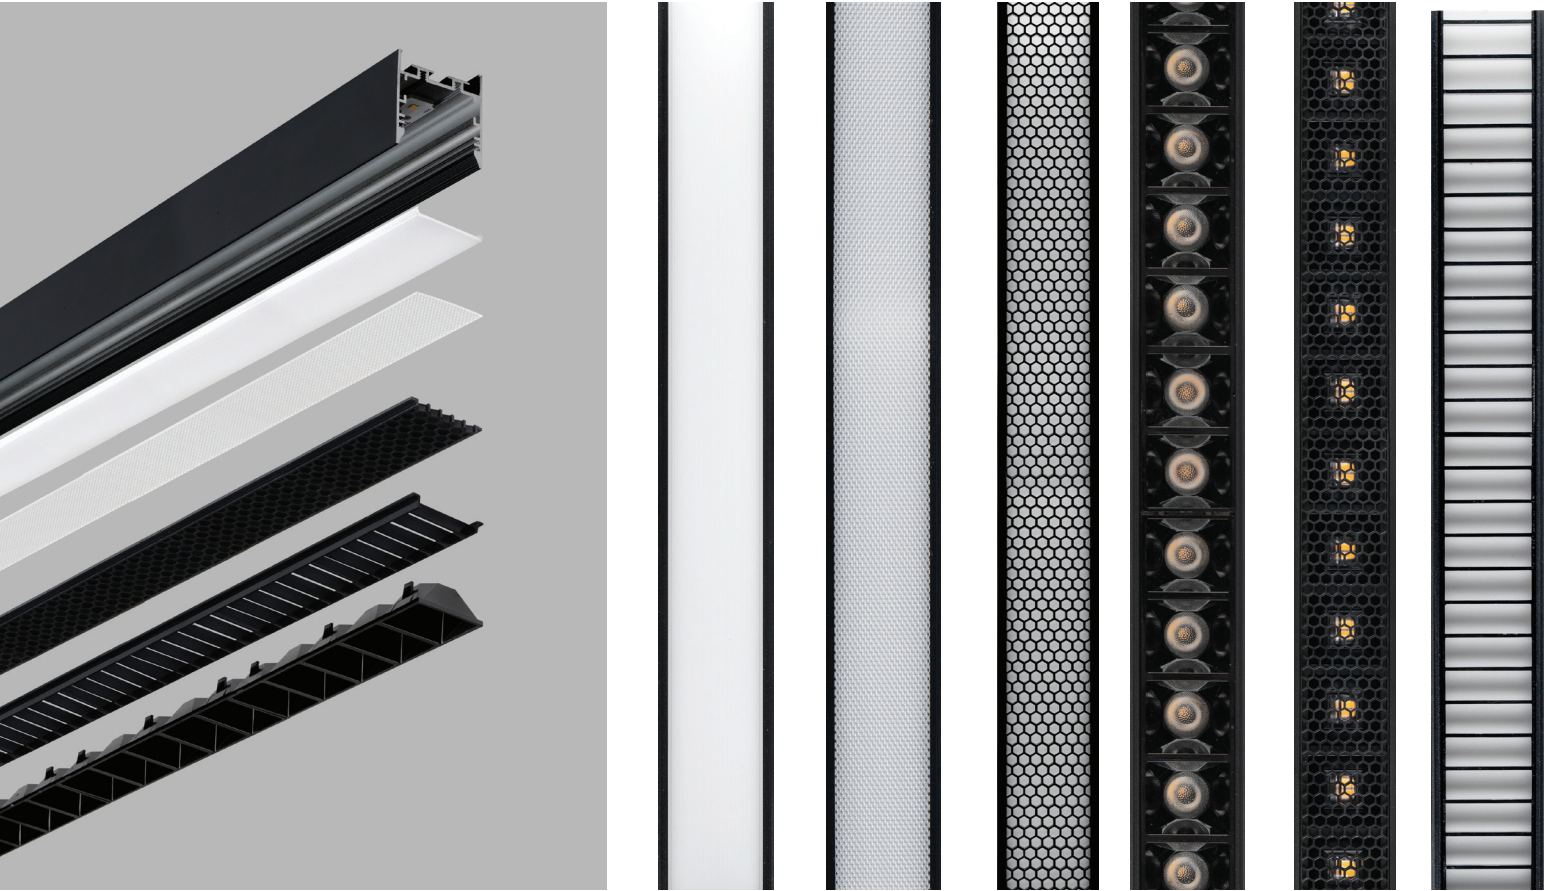


Light Quality and Performance

The range is available in 2700K, 3000K, 3500K, and 4000K, covering different lighting atmospheres from warm and comfortable to clean and neutral. Tunable White versions are also available for projects that require dynamic color temperature control. With high CRI, efficient performance, and excellent color consistency with SDCM<3, the luminaires ensure accurate color rendering, stable light quality, and a uniform visual result across the entire installation.



GRID 34x75

CEILING / SUSPENDED / TRIMLESS

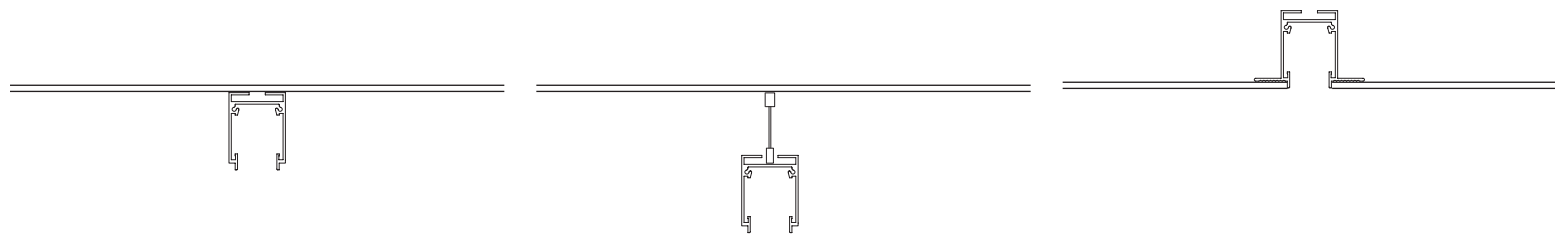

Features

Reflectors Color



Matt Black



Chrome Black



Silver



Gold



Black




White



Custom Rate

Finishing Color

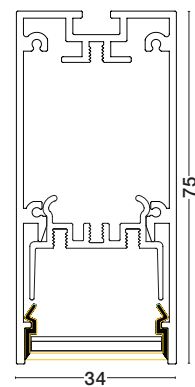

Technical Data

Options		LO			HE			HO		
		Power (W)	Lumen / m	Lumen / W	Power (W)	Lumen / m	Lumen / W	Power (W)	Lumen / m	Lumen / W
Optics	Light Source (No Optics)	24,40	3806	156	35,30	5295	150	49,90	7235	145
	Opal	24,40	2748	113	35,30	3824	108	49,90	5102	102
	Opal + Prismatic	24,40	2361	96	35,30	3285	93	49,90	4396	88
Diffusers	Light Source (No Optics)	35,00	5250	150	49,20	7282	148	68,40	10054	147
	Smd Lens 15°	35,00	3897	111	49,20	5373	109	68,40	7169	105
	Smd Lens 30°	35,00	3897	111	49,20	5373	109	68,40	7169	105
	Smd Lens 40°	35,00	4239	121	49,20	5516	112	68,40	7636	112

Code

X -	X -	X -	X -	X -	X -	X -	X -
	Length (mm) 295 575 855 1135 1415 1695 1975 2255 2535 2815 3095 3375 3655 3935 4215 4495 4775			Output LO HE HO		Finishing Color B - Black W - White C - Custom Color	Dimming O - On/Off D - DALI 10 - 0-10 T - TRIAC C - CASAMB
			Reflectors Color* MB - Matt Black CB - Chrome Black S - Silver G - Gold		CCT (K) 27 - 2700 30 - 3000 35 - 3500 40 - 4000 TW - Tunable White		
		Optics / Cover O - Opal P - Prismatic 15 - Beam angle 15° 30 - Beam angle 30° 40 - Beam angle 40°					
MOUNT TYPE G3475C - CEILING G3475C - SUSPENDED G3475T - TRIMLESS					Example G3475C-3375-24-CB-HE-27-B-D		


CEILING / SUSPENDED / INDIRECT



Matt Black







Black



White



Custom Ral



Frosted





Beam Angle 65°

Beam Angle 90°



Assymmetric

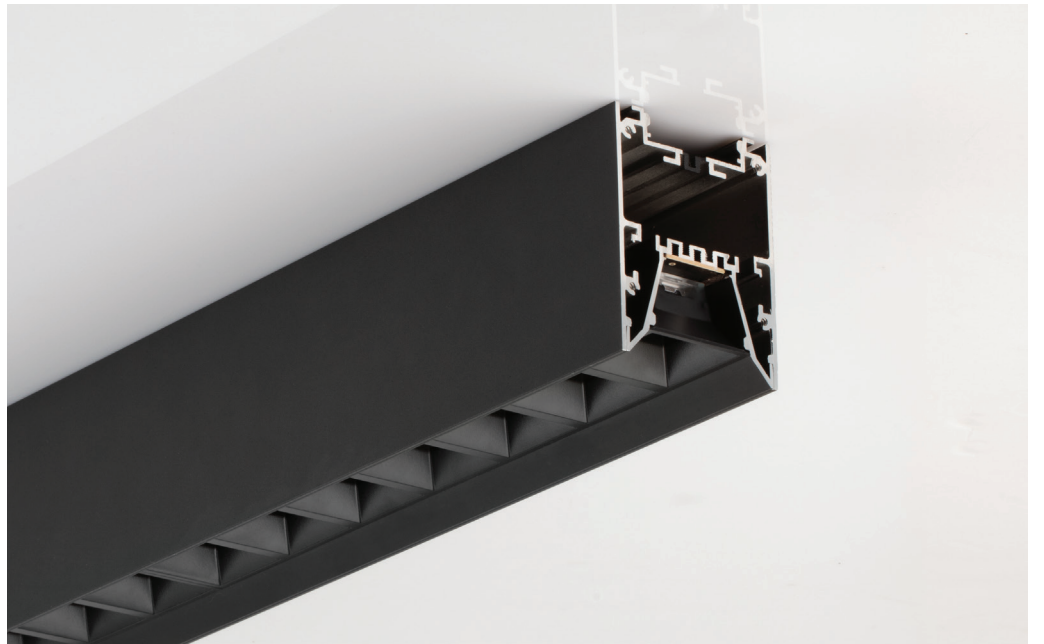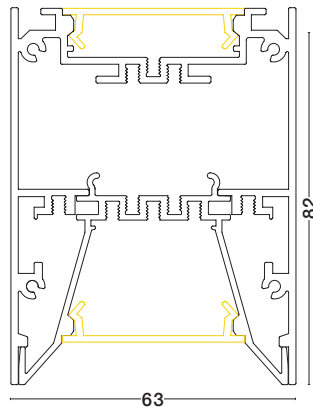

Options		LO			HE			HO		
		Power (W)	Lumen / m	Lumen / W	Power (W)	Lumen / m	Lumen / W	Power (W)	Lumen / m	Lumen / W
Optics	Light Source (No Optics)	25,70	4156	161	38,00	5793	152	53,30	7835	147
	Opal	25,70	1931	75	38,00	2731	72	53,30	3668	69
Diffusers	Light Source (No Optics)	22,90	4305	188	32,40	5994	185	45,60	8390	184
	Lens 65°	22,90	3469	151	32,40	4866	150	45,60	6637	145
	Lens 90°	22,90	2976	130	32,40	4171	129	45,60	5685	125
	Asymmetric Lens	22,90	2883	125	32,40	4053	125	45,60	5569	122

X -	X -	X -	X -	X -	X -	X -	X -	X -
	Length (mm) 295 575 855 1135 1415 1695 1975 2255 2535 2815 3095 3375 3655 3935 4215 4495 4775			Output LO HE HO		CCT (K) 27 - 2700 30 - 3000 35 - 3500 40 - 4000 TW - Tunable White	Finishing Color B - Black W - White C - Custom Color	Indirect (Up) N - No 27 - 2700K 30 - 3000K 40 - 3500K
			Reflectors Color* MB - Matt Black				Dimming O - On/Off D - DALI 10 - 0-10 T - TRIAC C - CASAMBI	
		Optics / Cover F - Frosted 65 - Beam angle 65° 90 - Beam angle 90° A - Assymetric						
MOUNT TYPE B6382C - CEILING B6382S - SUSPENDED					Example B6382C-2815-F-MB-HE-TW-B-O-27			


CEILING / SUSPENDED / TRIMLESS / RECESSED



Finishing Color



Grille	Beam Angle 15°	Beam Angle 30°	Beam Angle 40°

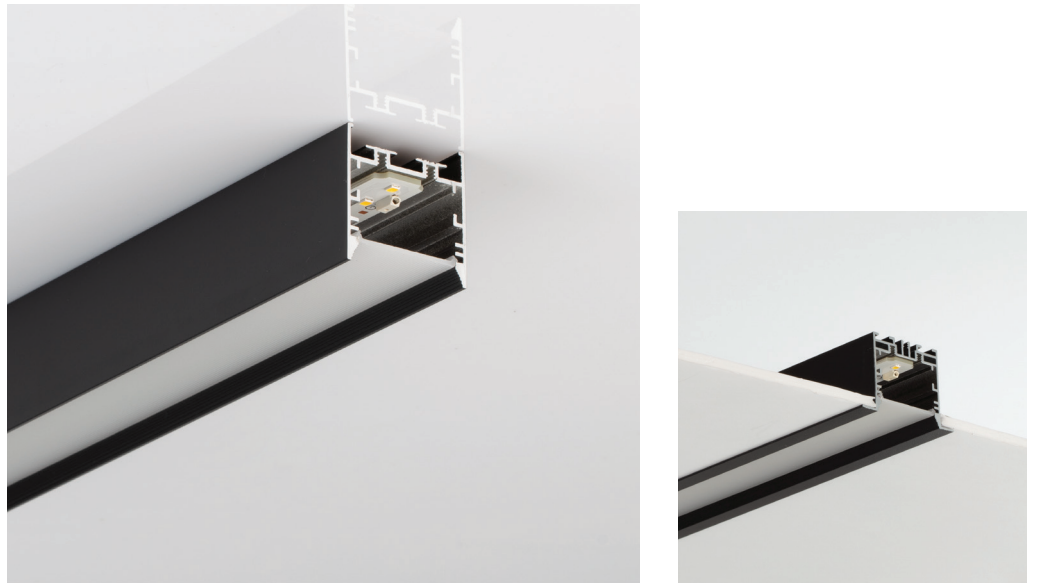

Technical Data

Options		LO			HE			HO		
		Power (W)	Lumen / m	Lumen / W	Power (W)	Lumen / m	Lumen / W	Power (W)	Lumen / m	Lumen / W
Optics	Light Source (No Optics)	28,30	4212	149	39,40	5840	148	55,40	8128	146
	Frosted	28,30	1882	66	39,70	2593	65	55,40	3496	63
	Opal	28,30	1988	70	39,70	2766	70	55,70	3732	67
	Opal + Prismatic	28,30	1630	57	39,70	2271	57	55,40	3068	55
	Opal + Honeycomb	28,30	519	18	39,70	723	18	55,40	978	17
	Opal + Grillie	28,30	904	32	39,70	1261	32	55,40	1693	30
Diffusers	Light Source (No Optics)	35,00	5250	150	49,2	7282	148	68,4	10054	147
	Lens 15°	35,00	3897	111	49,20	5373	109	68,40	7169	105
	Lens 30°	35,00	3897	111	49,20	5373	109	68,40	7169	105
	Lens 40°	35,00	4239	121	49,20	5516	112	68,40	7636	112

Code

X -	X -	X -	X -	X -	X -	X -
	Length (mm) 295 575 855 1135 1415 1695 1975 2255 2535 2815 3095 3375 3655 3935 4215 4495 4775			Output LO HE HO		Finishing Color B - Black W - White C - Custom Color
			Reflectors Color* MB - Matt Black CB - Chrome Black S - Silver G - Gold		CCT (K) 27 - 2700 30 - 3000 35 - 3500 40 - 4000 TW - Tunable White	Dimming O - On/Off D - DALI 10 - 0-10 T - TRIAC C - CASAMBI
		Optics / Cover F - Frosted P - Prismatic O - Opal OH - Opal & Honeycomb OG - Opal & Grille 15 - Beam angle 15° 24 - Beam angle 24° 36 - Beam angle 36° 48 - Beam angle 48°				
MOUNT TYPE E5175C - CEILING E5175S - SUSPENDED E5175T - TRIMLESS E5175						Example E5175C-295-OH-CB-HE-27-B-T

CEILING / SUSPENDED



Matt Black



Black with Silver



White with Black






Black



White



Custom Ral

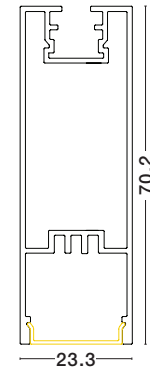[illegible]

Beam Angle 36°

Frosted



X -	X -	X -	X -	X -	X -	X -
	Length (mm) 295 575 855 1135 1415 1695 1975 2255 2535 2815 3095 3375 3655 3935 4215 4495 4775			Output LO HE HO	CCT (K) 27 - 2700 30 - 3000 35 - 3500 40 - 4000	Finishing Color B - Black W - White C - Custom Color
			Reflectors Color* MB - Matt Black BS - Black with Silver Reflectors WB - White with Black Reflectors			Dimming O - On/Off D - DALI 10 - 0-10 T - TRIAC C - CASAMBI
		Optics / Cover F - Frosted 36 - Beam angle 36*				
MOUNT TYPE F2370C - CEILING F2370S - SUSPENDED						Example F2370C-1975-36-MB-HE-30-C-10

