

NOVA LUCE


PRODUCT DATASHEET

Version: 001

PRODUCT PHOTOGRAPH



TECHNICAL DRAWING

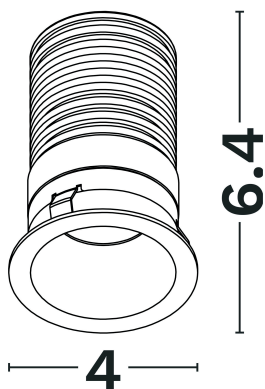

COMPATIBLE WITH

- On/Off Driver: 9030471
- Triac Driver:
- Dali Driver: 9844146

GENERAL INFORMATION

Product Code	9030786
Product Category	Downlights
Product Family	Delve
Mounting Location	Ceiling
Application Environment	Outdoor

DIMENSION & WEIGHT

LxWxH (cm)	D: 4 H: 6.4
Cut out (cm)	D: 3.5
Weight (Kgr)	-

MATERIAL & COLOR

Product Color	Black
Body Material	Aluminium
Cover Material	N/A

APPLICATION & MOUNTING

Ambient Working Temp.	Max 40 oC
Type of Protection	IP65
Protection Class IK	IK05
Dimmable	Yes
Type of Dimming (Optional)	Dali
Mounting type	Recessed
Mounting Depth (cm)	6.4
Led Module Replaceable	No
Light Source	Led

NOVA LUCE S.A

Schimatari Viotias
32009, Greece

+30 22620 58 121
+30 22620 56 743

info@novaluce.com
www.novaluce.com



NOVA LUCE

PRODUCT DATASHEET

Version: 001

ELECTRICAL DATA

Power (Nominal)	5W
Input voltage (Nominal)	18Vdc
Mains Frequency	-
Output voltage	18Vdc
Output Current	250mA
Power Factor	0.82
Efficiency	>80%
SVM	<0.4
Pst	<1
Class	III

PHOTOMETRICAL DATA

Luminus Flux	199lm
Luminous Efficacy	40lm/W
Color Temperature	3000K
Light Color (Designation)	Warm White
CRI	90
SDCM	<3
Beam Angle	36°
UGR	<12

LIFESPAN

Lifetime	50000
----------	--------------

CERTIFICATES

Certificates	CE
--------------	-----------

WARRANTY

Warranty	5 years
----------	----------------

LIGHT DISTRIBUTION

NOVA LUCE S.A

Schimatari Viotias
32009, Greece

+30 22620 58 121
+30 22620 56 743

info@novaluce.com
www.novaluce.com

