

NOVA LUCE


PRODUCT DATASHEET

Version: 001

PRODUCT PHOTOGRAPH



TECHNICAL DRAWING

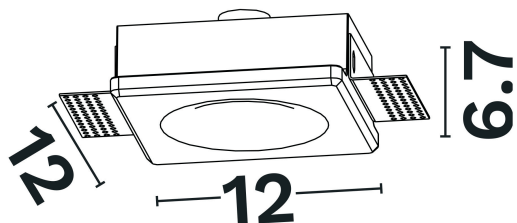

COMPATIBLE WITH

- On/Off Driver: included
- Triac Driver: 9844008
- Dali Driver: 9844145

GENERAL INFORMATION

Product Code	9060259
Product Category	Downlights
Product Family	Lyric
Mounting Location	Ceiling
Application Environment	Indoor

DIMENSION & WEIGHT

LxWxH (cm)	L 12 W 12 H 6.7
Cut out (cm)	12.3 x 12.3
Weight (Kgr)	-

MATERIAL & COLOR

Product Color	White
Body Material	Gypsum
Cover Material	N/A

APPLICATION & MOUNTING

Ambient Working Temp.	Max 40 oC
Type of Protection	IP20
Protection Class IK	IK03
Dimmable	No
Type of Dimming (Optional)	N/A
Mounting type	Recessed
Mounting Depth (cm)	6.7
Led Module Replaceable	No
Light Source	Led

NOVA LUCE S.A

Schimatari Viotias
32009, Greece

+30 22620 58 121
+30 22620 56 743

info@novaluce.com
www.novaluce.com



NOVA LUCE

PRODUCT DATASHEET

Version: 001

ELECTRICAL DATA

Power (Nominal)	3W
Input voltage (Nominal)	220-240Vac
Mains Frequency	50/60Hz
Output voltage	N/A
Output Current	N/A
Power Factor	N/A
Efficiency	N/A
SVM	N/A
Pst	N/A
Class	II

PHOTOMETRICAL DATA

Luminus Flux	220lm
Luminous Efficacy	73.33lm/W
Color Temperature	3000K
Light Color (Designation)	Warm White
CRI	90
SDCM	<3
Beam Angle	38°
UGR	<16

LIFESPAN

Lifetime	50000
----------	-------

CERTIFICATES

Certificates	CE, UCKA
--------------	----------

WARRANTY

Warranty	5 years
----------	---------

LIGHT DISTRIBUTION

NOVA LUCE S.A

Schimatari Viotias
32009, Greece

+30 22620 58 121
+30 22620 56 743

info@novaluce.com
www.novaluce.com

